

20 x 20 Deck · Castle Rock

Prepared for the owner · Castle Rock, CO 80104 · October 02, 2026

CHECK OR ACH

\$72,229

FINANCED

\$77,666

no money down

MONTHLY

\$901

6.99% · 10 years



A 20' x 20' deck ten feet up, ledgered to the house and carried on two Douglas fir beams over eight Diamond Pier foundations. TimberTech Advanced PVC decking in Vintage Coastline with a picture frame in the same board, every field board one piece from the house to the frame with no butt joints, and Cortex fasteners with color-matched plugs. TimberTech Fulton black steel rail with a Coastline drink rail on top, a HardieTrim skirt around the frame, and a stair with a landing down to a new concrete pad.

AT A GLANCE



From the yard



Isometric from the open corner

Deck	396 SF · 10'-0" above grade · 19'-11 3/8" x 19'-10 1/2" over fascia
Decking	TimberTech Vintage Coastline, picture frame in Vintage Coastline · Cortex fasteners with color-matched plugs
Rail	TimberTech Fulton Black, 36" · 54 LF
Stair	16 risers at 7.5", 4'-0" wide: 8 down to the 4'-0" x 4'-0" landing, continue, 8 down to the lower level · guard rail on the landings
Structure	2x10 pressure-treated frame at 12" on centre, 4x12 Douglas fir beams; 12 x 6x6 on DP-50/50
Design load	50 psf (40 psf live governs), stamped by a Colorado engineer


WHAT IT IS included in the price

ELEMENT SELECTION

Decking	TimberTech PVC Vintage, Coastline; picture frame in Vintage Coastline. Square-shoulder boards, 3/16" gaps, matching fascia. Ignition Resistant, Class A, WUI; Limited Lifetime product / 50-yr fade & stain.
Railing	TimberTech Fulton Rail, Black, 36"; Coastline drink rail on top. 54 LF.
Frame	21 2x10 #1 True Frame Joist SYP GC @ 12" OC x 19'-5"; 2-ply 2x10 front and sides; 4x12 Douglas fir beams.
Foundation	DP-50/50.
Design load	30 psf snow, stamped by a Colorado engineer.
Hardware	Simpson ZMAX galvanized connectors. Cortex fasteners with color-matched plugs.



From the front corner

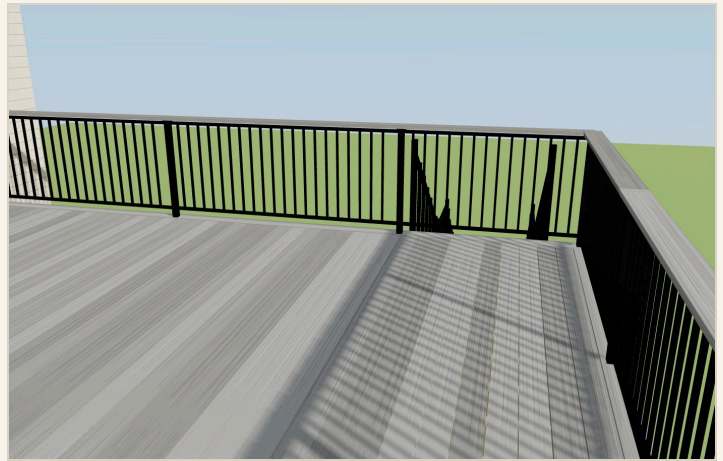

Standing on the deck



Low isometric



Under the deck — posts, beams, footings




Isometric from the stair corner



Isometric from the open corner




Isometric from under the frame

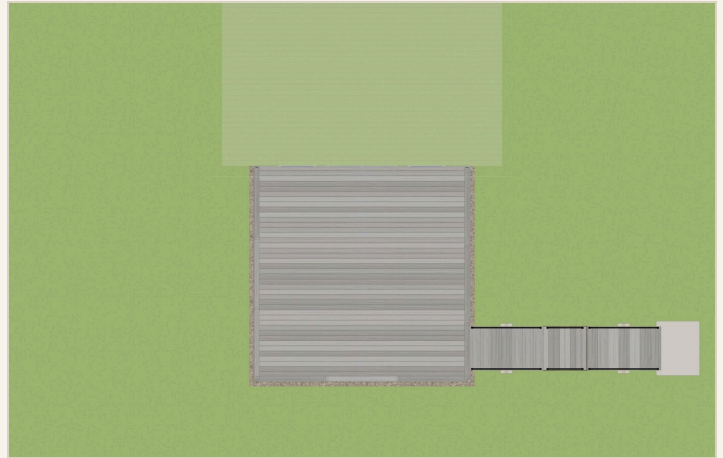


Plan from above


EXPLODED VIEWS every layer pulled apart

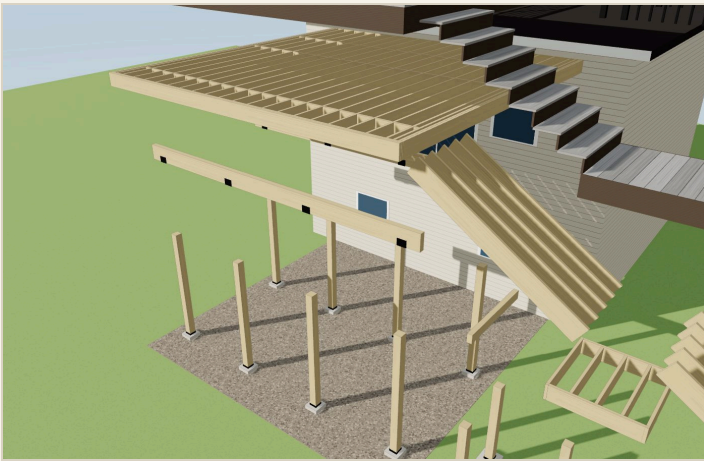

Exploded — every layer

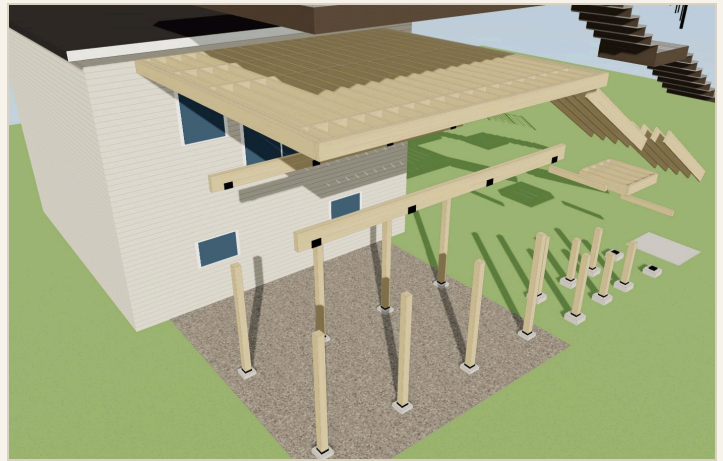


Exploded — from the open corner

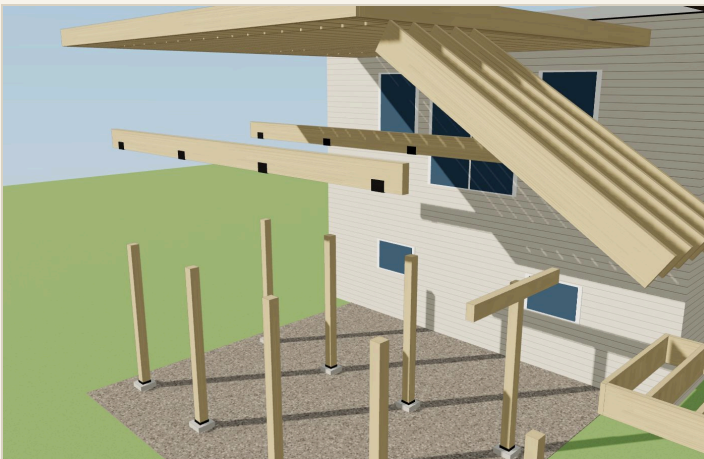

Exploded — from the front corner



Exploded — low angle

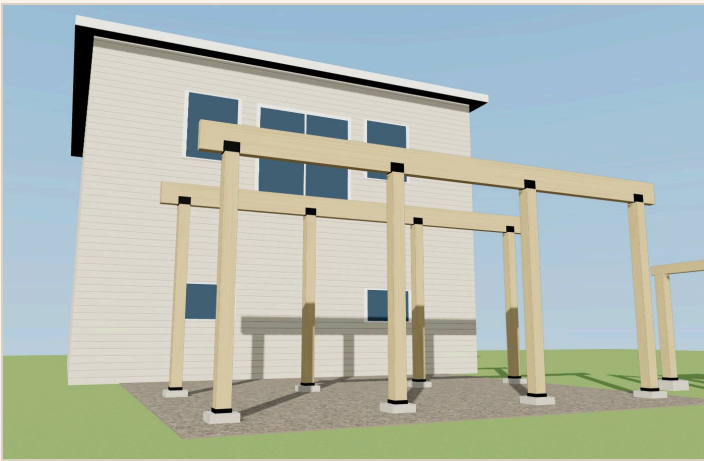

Posts and beams on the footings



Frame only — joists, rims, beams, ledger

PRICE

Total investment \$77,666 — financed, no money down

- 12 months no payments, no down payment
- 18 months no payments, no down payment
- 6.99% for 10 years — about \$901/month

Check or ACH: \$72,229 (7% savings)

WHAT THE PRICE INCLUDES

ITEM	VALUE
Foundation & structure	\$25,120
Decking & fascia	\$21,467
Railing	\$5,889
Stairs	\$15,836
Coastline drink rail on the rail	\$2,333
Site & project services	\$1,584
Total, check or ACH	\$72,229
Total, financed	\$77,666

Engineering — \$1,800 to \$3,000. Stamped drawings by a Colorado engineer (30 psf snow). GSX provides the engineer and bills the engineering at cost, with no markup. You own the stamped set. It is separate from the deck price above.

NEXT STEP

Engineering first. This is a quote: the numbers depend on the stamped engineering, so the first step is engineering. GSX provides the Colorado engineer and supplies the design package; you pay GSX the engineer's cost at no markup and you own the stamped set. When the stamped set is in hand, GSX issues a fixed-price proposal on these numbers with the payment terms.

Quote, not a contract: a fixed-price proposal follows the stamped engineering. Quote numbers hold 30 days. Renders and plan are design intent; the stamped engineering set governs structure, dimensions and locations.



The interactive 3D model lives at the online version of this document.

GS Exterior Experts · Deck Division

Renders and drawings are design intent; dimensions on the sheets govern. Numbers hold 30 days.