

Glengarry Pl · Lower Deck

Prepared for the owner · 166 Glengarry Pl, Castle Rock, CO 80108 · September 21, 2026

CHECK OR ACH	FINANCED	MONTHLY
\$38,319	\$41,203 no money down	\$478 6.99% · 10 years



The lower deck in the alcove, 2'4" above grade, rebuilt inside the existing stucco parapet walls: a new 2x10 pressure-treated frame at 12" on centre on a 6x12 Douglas fir beam, TimberTech Vintage Coastline decking with a Dark Hickory picture frame and breaker board, Cortex fasteners with color-matched plugs. No rail; the parapet walls stay.

AT A GLANCE



From the yard




Isometric from the open corner

- Deck** 332.8 SF · 2'-4" above grade · 29.2 LF of outer edge
- Decking** TimberTech Vintage Coastline, picture frame and breaker boards in Vintage Dark Hickory · Cortex fasteners with color-matched plugs
- Rail** The existing stucco parapet stays
- Structure** 2x10 pressure-treated frame at 12" on centre, 6x12 Douglas fir beams; 3 x 6x6 on DP-50/50
- Design load** 50 psf (40 psf live governs), stamped by a Colorado engineer


WHAT IT IS included in the price

ELEMENT SELECTION

Decking	TimberTech PVC Vintage, Coastline; picture frame and dividers in Vintage Dark Hickory. Square-shoulder boards, 3/16" gaps, matching fascia. Ignition Resistant, Class A, WUI; Limited Lifetime product / 50-yr fade & stain.
Frame	21 2x10 #1 True Frame Joist SYP GC @ 12" OC; 2-ply 2x10 front and sides; 6x12 Douglas fir beams.
Foundation	DP-50/50.
Design load	30 psf snow, stamped by a Colorado engineer. Colorado Wildfire Resiliency Code practice: Class A decking, noncombustible rail, metal flashing at every wall.
Hardware	Simpson ZMAX galvanized connectors. Cortex fasteners with color-matched plugs.

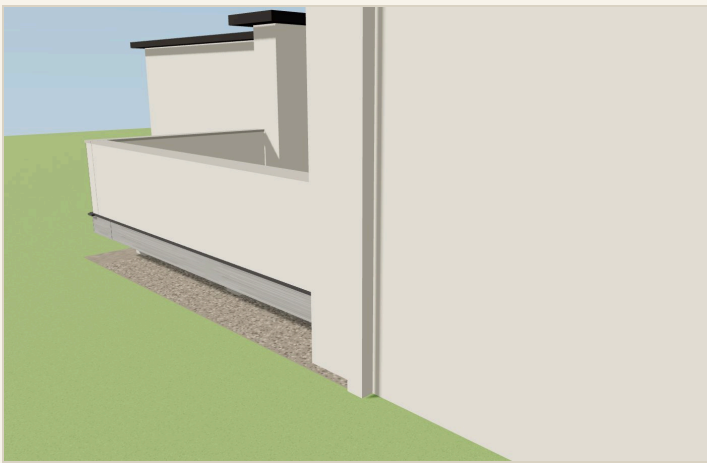

From the front corner

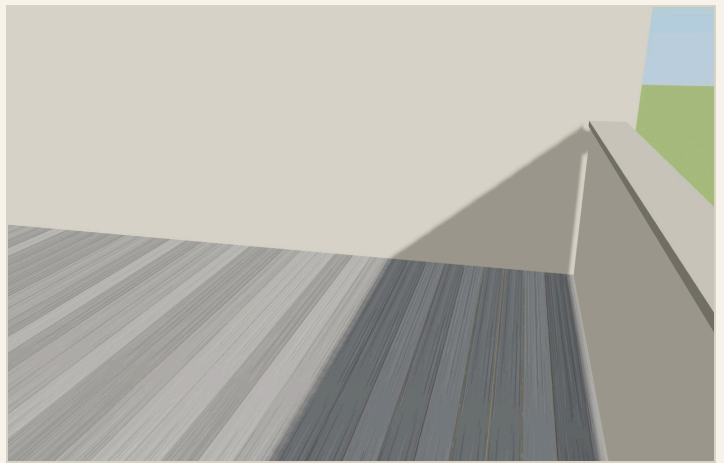


Standing on the deck




Low isometric



Under the deck — posts, beams, footings

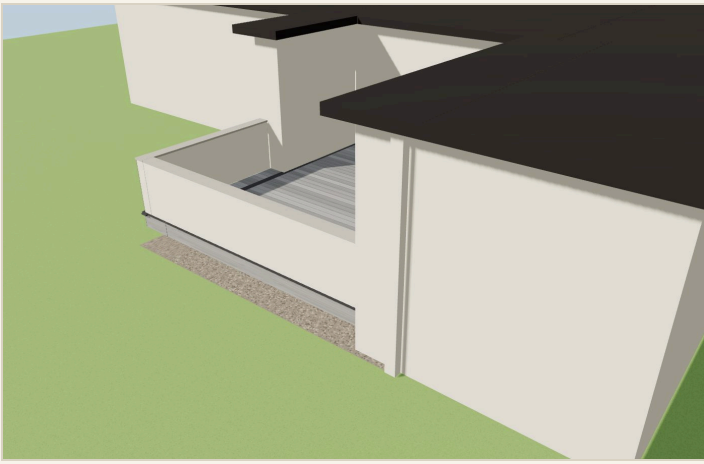


Isometric from the stair corner

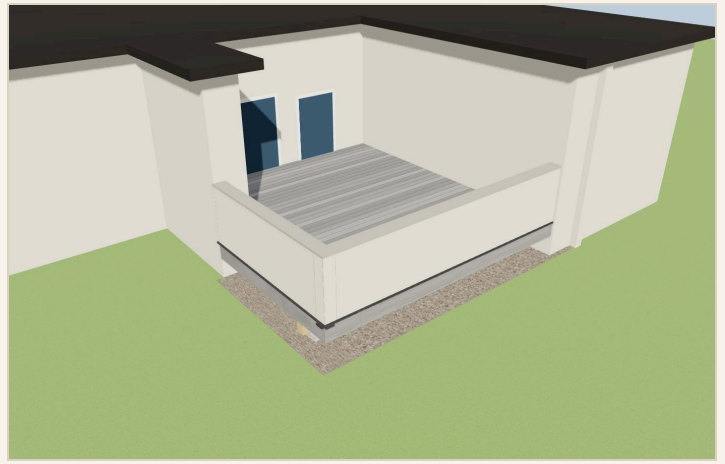

Isometric from the open corner




Isometric from under the frame

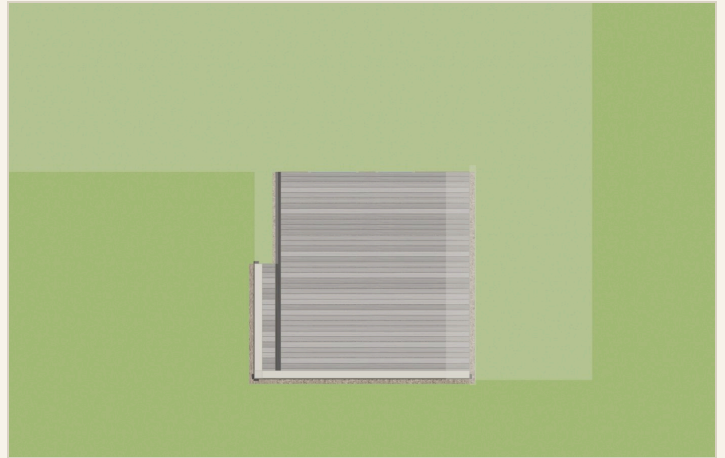


Plan from above

EXPLODED VIEWS every layer pulled apart

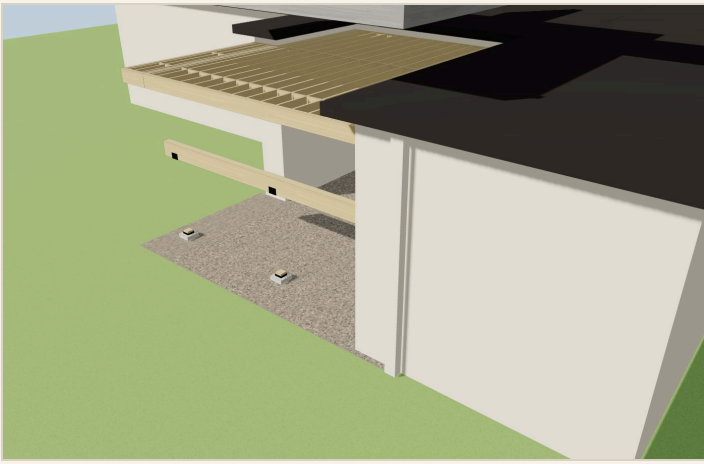

Exploded — every layer

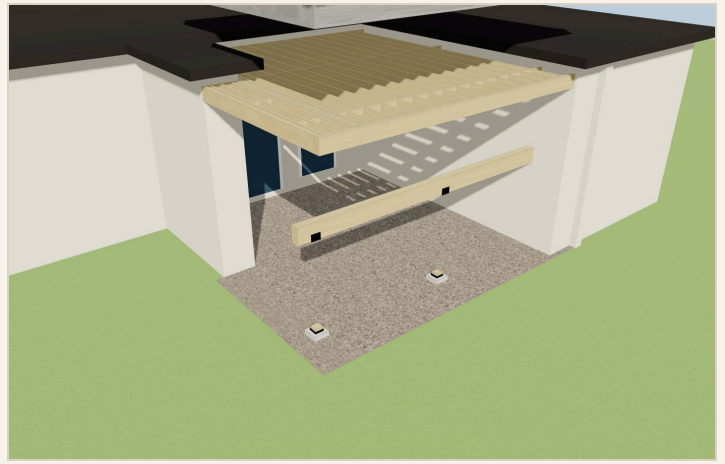


Exploded — from the open corner



Exploded — from the front corner



Exploded — low angle

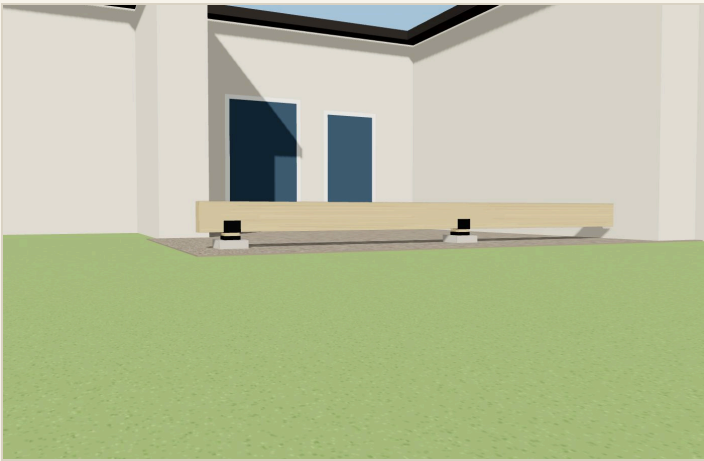

Posts and beams on the footings



Frame only — joists, rims, beams, ledger

PRICE

Total investment \$41,203 — financed, no money down

- 12 months no payments, no down payment
- 18 months no payments, no down payment
- 6.99% for 10 years — about \$478/month

Check or ACH: \$38,319 (7% savings)

WHAT THE PRICE INCLUDES

ITEM	VALUE
Demolition & haul-off	\$1,148
Foundation & structure	\$15,051
Decking & fascia	\$20,789
Site & project services	\$1,331
Total, check or ACH	\$38,319
Total, financed	\$41,203


Engineering — \$1,800 to \$3,000. Stamped drawings by a Colorado engineer (30 psf snow). GSX provides the engineer and bills the engineering at cost, with no markup. You own the stamped set. It is separate from the deck price above.

NEXT STEP

Engineering first. This is a quote: the numbers depend on the stamped engineering, so the first step is engineering. GSX provides the Colorado engineer and supplies the design package; you pay GSX the engineer's cost at no markup and you own the stamped set. When the stamped set is in hand, GSX issues a fixed-price proposal on these numbers with the payment terms.

Quote, not a contract: a fixed-price proposal follows the stamped engineering. Quote numbers hold 30 days. Renders and plan are design intent; the stamped engineering set governs structure, dimensions and locations.

3D MODEL

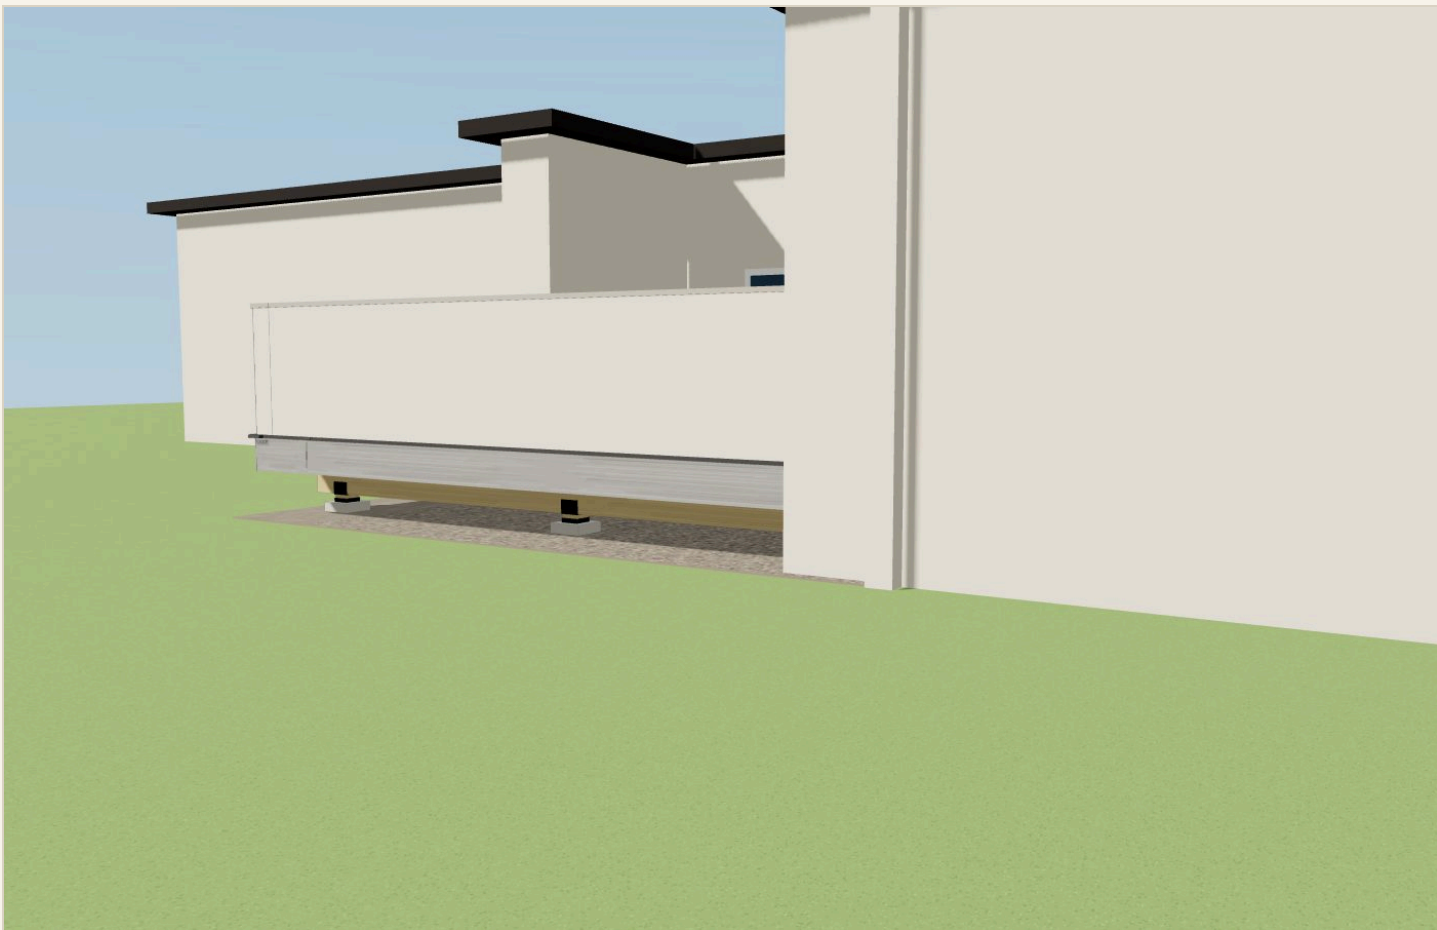

The interactive 3D model lives at the online version of this document.

GS Exterior Experts · Deck Division

Renders and drawings are design intent; dimensions on the sheets govern. Numbers hold 30 days.