

1675 Summit Point Ct — Main Deck with Porch Cover, and the 10 x 10

Both decks in one package, every part broken out: design reads (size, square feet, rail feet, loads), site and code flags (snow, live and dead loads, wind, frost, WUI, setbacks, engineering), the Decks & Docks order line by line, the cost stack, the homeowner quote, the drawing set with G-001 design criteria on top, the build steps, the renders, isometrics and the 3D model. TimberTech Advanced PVC Vintage Weathered Teak, every board Cortex-screwed through the face, 2x10 joists at 12" OC, Cinch steel rail with the drink rail, HardieTrim Timber Bark skirt, and the 26'6" x 10'6" porch cover with Hardie soffit, fascia and rakes. Class A / WUI throughout.

PACKAGE, CHECK OR ACH \$133,429	PACKAGE, FINANCED \$143,472	MONTHLY \$1,665	DECK AREA 572 SF	RAIL 101.5 LF	POSTS 11
---------------------------------------	-----------------------------------	--------------------	---------------------	------------------	-------------

SCOPE	AREA	RAIL	POSTS	CHECK / ACH	FINANCED	MONTHLY
Main deck + porch cover	473 SF	72.5 LF	9	\$113,720	\$122,280	\$1,419/mo
Deck 2 — 10 x 10	99 SF	29 LF	2	\$19,709	\$21,192	\$246/mo
Both decks, one package	572 SF	101.5 LF	11	\$133,429	\$143,472	\$1,665/mo

Main deck + porch cover

37 x 30 as drawn · angled bay at the chimney · 26'6" x 10'6" porch cover · 9-riser stair

DESIGN READS

Frame	4 zones, 37'-0" along the house, 30'-0" at the deepest
Deck	77.5 LF of outer edge · 473 SF · 8'-0" above grade
Zone	W Wing — 6' at the top wall, 30' deep, angled bay cuts its inner edge: 6'-0" x 30'-0", wall set back 22'-6"
Zone	N Under the short wall beside the chimney: 4'-6" x 7'-6"
Zone	B Chimney bay — 10'6" brick chimney 3' proud: 10'-6" x 7'-6"

Zone	P Porch bay under the cover: 16'-0" x 10'-6", wall set back 3'-0"
Joists	40 2x10 #1 True Frame Joist SYP GC @ 12" OC
Rims	2-ply 2x10 front and sides
Beam	DROP (2)2x10 SYP W: 5'-11", 2 posts at 1'-0 1/2" / 4'-11 1/2" (worst 2,052 lb)
Beam	DROP (2)2x10 SYP W+N+B+P: 36'-11", 7 posts at 1'-0 1/2" / 6'-0" / 10'-6" / 15'-9" / 21'-0" / 28'-5 3/4" / 35'-11 1/2" (worst 2,337 lb)
Posts	9 x 6x6 on 24" concrete piers 3'-0" deep
Load	50 psf (40 psf live governs) · engineered
Decking	TimberTech Vintage Weathered Teak — 113 rows parallel to the house, picture frame in Vintage Weathered Teak, 3/16" gaps, Cortex
Rail	Cinch 36" Satin Black: 10 bays, 11 posts, 72.5 LF + drink rail
Stair	end:right: 9 risers @ 7.33", 8 treads, 5 stringers, 4'-0" wide

- 4 zones, 37.0' along the house, outline end:left 30'-0" · front:W 6'-0" · front:N 4'-6" · front:B 10'-6" · front:P 16'-0" · end:right 10'-6"
- DROP (2)2x10 SYP W: 5'-11" long, 2 posts at 1'-0 1/2" / 4'-11 1/2"
- DROP (2)2x10 SYP W+N+B+P: 36'-11" long, 7 posts at 1'-0 1/2" / 6'-0" / 10'-6" / 15'-9" / 21'-0" / 28'-5 3/4" / 35'-11 1/2"; pieces 15'-8 1/2" · 12'-8 3/4" · 8'-5 3/4"
- W: added a drop beam at 14'-0" from the house — 2x10 @ 12" OC SYP only spans 16'-2"
- N: 2'-1 1/2" cantilever past the drop beam exceeds L/4 of the 5'-3" back-span — engineered condition (owner-directed)
- B: 2'-1 1/2" cantilever past the drop beam exceeds L/4 of the 5'-3" back-span — engineered condition (owner-directed)
- P: 2'-1 1/2" cantilever past the drop beam exceeds L/4 of the 8'-3" back-span — engineered condition (owner-directed)

SITE & CODE FLAGS internal

ENGINEER	ENGINEERING	roof over the deck — roof snow + deck loads on the posts and footings; engineered
CODE	SNOW	standing seam roof over the deck — metal sheds its snow load onto the deck and the stair below: snow retention bar the full low eave (S-5! ColorGard or equal, seam clamps, no penetrations), sized for the ground snow ASCE 7 Ch. 7 / manufacturer
CODE	FROST	concrete piers bear 2'-6" below grade — frost depth 2'-6" for Colorado Springs; confirm the local frost line and soil bearing (1,500 psf assumed) IRC R403.1.4
CODE	FIRE	WUI zone: Vintage is Ignition Resistant, Class A, WUI — keep the under-deck area clear of combustibles, 1-hr or noncombustible enclosure may be required IWUIC 504.7
CODE	STAIRS	end:right stair: 9 risers — graspable handrail 34-38" on at least one side (IRC R311.7.8) IRC R311.7
CHECK	SETBACK	easement on record: Check the plat for rear/side utility + drainage easements (typical 5-10') — no footings or structure inside it plat

CHECK	LEDGER	verify the rim board behind the ledger is solid 2x/LVL/engineered rim (not I-joist web or a hollow band) before the ledger fasteners go in IRC R507.9.1.1
CHECK	STAIRS	end:right stair: stringer horizontal run 7.8' > 6' — add an intermediate support/landing or use solid stringers (DCA6) IRC R311.7
INFO	SNOW	standing seam on a low-slope shed (~1:12 to 2:12): mechanically seamed or snap-lock rated for the pitch, high-temp self-adhered underlayment under every panel, headwall flashing counterflashed into the house wall
INFO	FOOTING	gutter downspouts discharge onto splash blocks 3'+ from the deck footings and the house foundation, downhill; no downspout dumping at a post
INFO	LEDGER	lateral: 4 x DTT1Z (750 lb each) into house floor framing IRC R507.9.2
INFO	WIND	basic wind speed 115 mph — standard connectors
INFO	FIRE	Cinch rail is noncombustible (Colorado Wildfire Resiliency Code practice: Class A decking, noncombustible rail, metal flashing at every wall)
INFO	STAIRS	end:right stair: 9 risers @ 7.33" · 8 treads @ 11.66" · run 7'-9 1/4" · stringers 5 @ 12" OC (composite treads) IRC R311.7.5 / TimberTech

THE ORDER Decks & Docks · GSEXT1 · ship to the job

Lumber

NET	ORDER	UNIT	ITEM	WHY
51	52	ea	2x10x12 #1 True Frame Joist SYP GC	+1 cull (4 front rim ply · 2 ledger · 15 field joist · 3 PF joist · 4 left rim ply · 4 right rim ply · 2 field joist, front rim ply · field joist, ledger · 3 PF joist, blocking · 2 blocking, left rim ply · 2 blocking, right rim ply · 9 blocking, field joist)
3	4	ea	2x10x16 #1 True Frame Joist SYP GC	+1 cull (2 front rim ply · ledger)
11	12	ea	2x10x24 #1 True Frame Joist SYP GC	+1 cull (5 field joist · 2 PF joist · 2 left rim ply · 2 right rim ply)
5	6	ea	2x12x12 #1 True Frame Joist SYP GC	+1 cull (5 stair stringer)
1	2	ea	2x6x12 #1 True Frame Joist SYP GC	+1 cull (stair kicker/hanger board)
2	2	ea	2x10x16 #1 True Frame Joist SYP GC	exact (2 drop beam: DROP (2)2x10 SYP W · DROP (2)2x10 SYP W+N+B+P)
2	2	ea	2x10x14 #1 True Frame Joist SYP GC	exact (2 drop beam: DROP (2)2x10 SYP W · DROP (2)2x10 SYP W+N+B+P)
2	2	ea	2x10x10 #1 True Frame Joist SYP GC	exact (2 drop beam: DROP (2)2x10 SYP W · DROP (2)2x10 SYP W+N+B+P)
1	1	ea	2x10x12 #1 True Frame Joist SYP GC	exact (drop beam: DROP (2)2x10 SYP W · DROP (2)2x10 SYP W+N+B+P)

NET	ORDER	UNIT	ITEM	WHY
9	9	ea	6x6x8 #2 GC	exact (yields 9 posts at ~6'-2 1/2")

Footings

NET	ORDER	UNIT	ITEM	WHY
9	9	ea	24" form tube x 3'-0" (bearing 2'-6" below grade, frost 2'-6")	exact
144	146	bag	Concrete mix 80 lb	+2 (9.4 cf per pier)
9	9	ea	Simpson ABU66Z standoff post base 6x6 (concrete) wet-set 1/2"	exact
1	1	ea	Stair landing pad (end:right stair) — 4" slab, stringers bear on the pad	exact

Hardware

NET	ORDER	UNIT	ITEM	WHY
80	80	ea	Simpson LUS28Z face-mount hanger 2x8/2x10	exact (40 joists x 2 ends)
16	16	ea	Simpson HUCQ210-2-SDS concealed-flange double 2x10 hanger (SDS screws included)	exact (2 side rims x 2 ends) — confirm stock
2	2	box	Camo 9ga HDG hanger nail 3" 5 lb (~350)	480 needed of ~700
2	2	box	Camo 9ga HDG hanger nail 1-1/2" 5 lb (~650)	890 needed of ~1300
1	1	box	FastenMaster LedgerLOK 3-5/8" 50 ct	38 needed
16	16	ea	Simpson DTT1Z lateral tie kit w/ SDS screws	exact (2 near each end of every ledger, into house floor framing)
57	57	ea	Simpson H2.5AZ hurricane tie (joists to the drop beam, hidden)	exact (40 joists + 2 rims at each drop beam)
9	9	ea	Simpson BC46Z post cap 6x post / 4x beam	exact — (2)2x beam in a 4x cap needs a 1/2" shim; confirm cap
2	2	box	Simpson SD10212R100 #10 x 2-1/2" connector screw 100 ct	198 needed (bases 108 · caps 90)
7	7	box	GRK RSS #10 x 3-1/8" structural screw 100 ct	640 needed (laminations 328 · blocking 312)
28	30	ea	7/16" x 4-1/2" HDG hex bolt + nut + 2 washers	+2 (14 rail posts x 2)
5	5	ea	Simpson LSCZ adjustable stair-stringer connector	exact (end:right stair, 1 per stringer at the rim)

Flashing & waterproofing

NET	ORDER	UNIT	ITEM	WHY
1	1	roll	Grace Vycor Deck Protector 12" x 75' (wall membrane behind ledger + side rims)	62 LF of house wall with laps — nothing on a privacy wall
7	7	ea	Aluminum L-flashing 10' (over ledger + side rims)	house walls only
7	7	ea	26 ga galvanized wall flashing 12" x 10' (CWRC 404.3.2: noncombustible flashing at the deck/wall intersection, behind cladding)	WUI practice — house walls only

NET	ORDER	UNIT	ITEM	WHY
10	10	roll	Nichigo G-Tape 3035 2" x 65' black	599' needed of 650'
3	3	roll	Nichigo G-Tape 3035 4" x 65' black	188' needed of 195'

Decking

NET	ORDER	UNIT	ITEM	WHY
92	94	ea	TimberTech Vintage Weathered Teak 1x6x12 Square Edge	+2 (W: 62 rows @ 5'-8 1/4" · N: 15 rows @ 4'-7 15/16" · B: 15 rows @ 10'-7 15/16" · P: 21 rows @ 15'-8 1/4")
21	23	ea	TimberTech Vintage Weathered Teak 1x6x16 Square Edge	+2 (W: 62 rows @ 5'-8 1/4" · N: 15 rows @ 4'-7 15/16" · B: 15 rows @ 10'-7 15/16" · P: 21 rows @ 15'-8 1/4")
1	1	ea	TimberTech Vintage Weathered Teak 1x6x12 Square Edge — rip boards at the house	exact (2.47" · 1.66" strips)
1	1	ea	TimberTech Vintage Weathered Teak 1x6x16 Square Edge — borders	exact (border end:right 10'-7")
2	3	ea	TimberTech Vintage Weathered Teak 1x6x20 Square Edge — borders	+1 (outer border -1"-37'-1" 20'-0" · border end:left 20'-0")

Fasteners

NET	ORDER	UNIT	ITEM	WHY
7	7	box	Cortex for TimberTech PVC, Weathered Teak plugs (350 ct / 100 SF)	2394 screws (2 per board at every bearing point, rips included) · 2450 supplied
1	1	box	Cortex for TimberTech PVC, Weathered Teak plugs — borders + dividers	124 screws

Fascia

NET	ORDER	UNIT	ITEM	WHY
15	16	ea	Deck skirt — HardieTrim 4/4 x 12 x 12' smooth ColorPlus Timber Bark (wraps the double rim, in place of the composite fascia)	+1 (left fascia (W) 12'-0" · left fascia (W) 12'-0" · left fascia (W) 6'-0 1/2" · right fascia (W) 12'-0" · right fascia (W) 12'-0" · right fascia (W) 6'-0 1/2" · front fascia (W) 6'-1" · left fascia (N) 7'-6 1/2" · right fascia (N) 7'-6 1/2" · front fascia (N) 4'-7" · left fascia (B) 7'-6 1/2" · right fascia (B) 7'-6 1/2" · front fascia (B) 10'-7" · left fascia (P) 10'-6 1/2" · right fascia (P) 10'-6 1/2" · front fascia (P) 12'-0" · front fascia (P) 4'-1")
1	1	box	Color-matched trim screws for HardieTrim, 100 ct (Timber Bark)	80 color-matched screws, pre-drilled, 2 per joist line
1	1	kit	ColorPlus touch-up kit, Timber Bark	cut ends

Rail

NET	ORDER	UNIT	ITEM	WHY
1	1	ea	Cinch HD Rail 6' x 36" level panel Satin Black	exact (cut to 4'-10 1/2")

NET	ORDER	UNIT	ITEM	WHY
9	9	ea	Cinch HD Rail 8' x 36" level panel Satin Black (welded steel balusters, brackets on, cut to bay)	exact (cut to 7'-1 5/16" / 7'-2 1/4")
2	2	ea	Cinch 2" CORNER post 36" Satin Black w/ brackets, cap, skirt	exact
2	2	ea	Cinch 2" END post 36" Satin Black w/ brackets, cap, skirt	exact
7	7	ea	Cinch 2" LINE post 36" Satin Black w/ brackets, cap, skirt	exact
5	6	ea	Drink rail — TimberTech Vintage Weathered Teak 1x6x16 Square Edge laid flat on the top rail, 72.5 LF, mitred at every turn	+1 (full-board line only, never scalloped)
10	10	kit	Cinch drink-rail bracket kit, black — per panel	exact (one per bay)
1	1	ea	Rust-Oleum flat black touch-up (cut ends)	exact

Stairs

NET	ORDER	UNIT	ITEM	WHY
8	9	ea	TimberTech Vintage Weathered Teak 1x6x12 Square Edge — treads (end:right stair)	+1 (8 treads x 2 boards @ 4'-0", 2 per board)
5	5	ea	TimberTech Vintage Weathered Teak riser board 7-1/4" x 12' (end:right stair)	exact (9 risers @ 4'-0")
2	2	ea	Cinch Rail 6' x 36" STAIR panel Satin Black (end:right stair)	exact
3	3	ea	Cinch 2" STAIR post Satin Black w/ brackets, cap (end:right stair)	exact (top + bottom of each rail side)
1	1	ea	Cinch graspable handrail kit (end:right stair)	exact (4+ risers — IRC R311.7.8)

Porch cover

NET	ORDER	UNIT	ITEM	WHY
5	5	ea	6x6 x 10' Western red cedar post (cover)	exact (5 posts at the rail line, ≤ 8'-6" OC)
4	4	ea	2x10x16 #1 SYP — cover beam (2 ply)	+0 ((2)2x10 x 26.5' at the posts)
2	2	ea	2x10x16 #1 SYP — cover ledger on the house	exact
20	21	ea	2x8x12 #1 SYP — cover rafters @ 16" OC	+1 cull (20 rafters, 12.0' with the overhang)
4	5	ea	2x8x16 #1 SYP — cover fascia / sub-fascia	+1 (50 LF)
11	11	sheet	7/16" OSB roof sheathing 4x8	318 SF + 10% cuts
318	334	SF	Standing seam roof — 24 ga steel 16" snap-lock panels x 12.0' (color TBD, PVDF), 20 panels	20 panels x 12.0' + 5% (one-piece eave to headwall, no end laps)
2	2	roll	High-temp self-adhered ice & water underlayment, 2 sq roll (under every metal panel)	318 SF — full coverage under metal (high-temp)
3	4	ea	Standing seam eave / drip trim 10', color-matched	26 LF low eave + 1
3	4	ea	Standing seam gable / rake trim 10', color-matched	two rakes x 12.0' + 1
3	4	ea	Headwall (ledger) flashing with Z-closure 10', color-matched — into the house siding / counterflash	26 LF at the house — counterflash into the siding / brick

NET	ORDER	UNIT	ITEM	WHY
6	6	ea	Foam + metal closure strips at eave and headwall, 10'	eave + headwall closures
1	1	box	Panel clips + pancake-head screws, box of 250	160 clips @ 18" OC on each seam
1	1	box	Color-matched #10 woodgrip trim screws w/ washers, 250	trims, closures, snow bar
3	3	ea	Butyl tape / polyurethane sealant, per roll or tube	headwall, eave, rake laps
26	28	LF	Snow retention — clamp-on bar across the low eave over the deck (color TBD)	26' — metal sheds 30 psf snow onto the deck and stair below; one bar 12-18" above the eave
3	4	ea	Gutter — 5" K-style aluminum on the low eave, color to match the fascia (26 LF, 1/16" per ft fall to the outlets)	26 LF — or one seamless run by the gutter sub
2	2	ea	5" K gutter end cap	one each end
2	2	ea	2x3 gutter outlet / drop	2 downspouts — at the cover posts
15	15	ea	Hidden gutter hanger w/ screw, 24" OC	24" OC (30 psf snow — 16" OC if the sub asks)
1	1	tube	Gutter seam sealer, tube	end caps, outlets, section laps
4	4	ea	Downspout — 2x3 aluminum, color to match the fascia, strapped to the cover post, down the deck post to a splash block at grade	2 x ~19' (eave to grade past the deck, 2 offsets) — field-measure
8	8	ea	2x3 A/B elbow	2 offsets at the deck edge + 1 at grade + 1 spare, per drop
8	8	ea	2x3 downspout strap / bracket	every 5' on the post
2	2	ea	Splash block (discharge away from the footings)	discharge 3'+ from the footings, downhill
9	9	panel	Porch ceiling — HardieSoffit 4' x 10' cedarmill ColorPlus Timber Bark (non-vented; 1 in 3 vented if the roof is closed)	318 SF + 10% cuts
6	6	lb	Stainless ring-shank siding nails 2", per lb	stainless ring-shank, 6" OC at every rafter
5	6	ea	Cover fascia + rakes — HardieTrim 4/4 x 7-1/4 x 12' rustic ColorPlus Timber Bark over the 2x8 sub-fascia	+1 (50 LF: front 26' + two rakes 12.0')
1	1	box	Color-matched trim screws for HardieTrim, 100 ct (Timber Bark)	color-matched trim screws
5	5	ea	Simpson ABU66Z standoff base, 6x6	exact
5	5	ea	Simpson AC6Z post cap, 6x6 to (2)2x10 beam	exact
20	20	ea	Simpson H2.5AZ rafter tie	one per rafter at the beam
40	40	ea	FastenMaster LedgerLOK 6" — cover ledger, 2 rows staggered 16" OC	26 LF x 2 rows @ 16"

Site

NET	ORDER	UNIT	ITEM	WHY
473	473	SF	Demo existing deck + haul-off	labor line — field verify the existing deck

FASTENER & CONNECTOR SCHEDULE

Ledger	2x10 ledger x 37'-0" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 38 fasteners
Joist tape	G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)
Field	Cortex face screws with color-matched plugs: 2 per board at every joist and at both ends of every run, color-matched plugs (2394 field + 124 border/divider)
Rail	Cinch 36" — 11 posts (2 CORNER, 2 END, 7 LINE) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post; drink rail board on Cinch drink-rail brackets, mitred at every turn

▼ Cut list

MEMBER	STOCK	LENGTH	QTY	NOTE
Field joists (W)	2x10	29'-7 1/2"	5	@ 12" OC, crown up
Picture-frame joists (W)	2x10	29'-7 1/2"	2	centre 5 1/4" from each frame face
Side rim plies (W)	2x10	29'-7 1/2"	4	2-ply, laminated on the ground with RSS 2 rows @ 12" staggered
Front rim plies (W)	2x10	6'-0"	2	inner ply takes the hangers; outer ply laminated after
Ledger (W)	2x10	6'-0"	1	top at deck height less board thickness; membrane behind, flashing over
Blocking (W)	2x10	10 1/2"	18	3 rows at 14'-0", 27'-10 1/2", 7'-0 3/4" from the wall
Field boards run W	Vintage Weathered Teak	5'-8 1/4"	62	boards run parallel to the house
Rip at the house (W)	Vintage Weathered Teak	5'-8 1/4"	1	rip to 2.47"
Field joists (N)	2x10	7'-1 1/2"	3	@ 12" OC, crown up
Picture-frame joists (N)	2x10	7'-1 1/2"	2	centre 5 1/4" from each frame face
Side rim plies (N)	2x10	7'-1 1/2"	4	2-ply, laminated on the ground with RSS 2 rows @ 12" staggered
Front rim plies (N)	2x10	4'-6"	2	inner ply takes the hangers; outer ply laminated after
Ledger (N)	2x10	4'-6"	1	top at deck height less board thickness; membrane behind, flashing over
Blocking (N)	2x10	10 1/2"	8	2 rows at 5'-4 1/2", 2'-9" from the wall
Field boards run N	Vintage Weathered Teak	4'-7 15/16"	15	boards run parallel to the house
Field joists (B)	2x10	7'-1 1/2"	9	@ 12" OC, crown up
Picture-frame joists (B)	2x10	7'-1 1/2"	2	centre 5 1/4" from each frame face

MEMBER	STOCK	LENGTH	QTY	NOTE
Side rim plies (B)	2x10	7'-1 1/2"	4	2-ply, laminated on the ground with RSS 2 rows @ 12" staggered
Front rim plies (B)	2x10	10'-6"	2	inner ply takes the hangers; outer ply laminated after
Ledger (B)	2x10	10'-6"	1	top at deck height less board thickness; membrane behind, flashing over
Blocking (B)	2x10	10 1/2"	20	2 rows at 5'-4 1/2", 2'-9" from the wall
Field boards run B	Vintage Weathered Teak	10'-7 15/16"	15	boards run parallel to the house
Field joists (P)	2x10	10'-1 1/2"	15	@ 12" OC, crown up
Picture-frame joists (P)	2x10	10'-1 1/2"	2	centre 5 1/4" from each frame face
Side rim plies (P)	2x10	10'-1 1/2"	4	2-ply, laminated on the ground with RSS 2 rows @ 12" staggered
Front rim plies (P)	2x10	16'-0"	2	inner ply takes the hangers; outer ply laminated after
Ledger (P)	2x10	16'-0"	1	top at deck height less board thickness; membrane behind, flashing over
Blocking (P)	2x10	10 1/2"	32	2 rows at 8'-4 1/2", 4'-3" from the wall
Field boards run P	Vintage Weathered Teak	15'-8 1/4"	21	boards run parallel to the house
Rip at the house (P)	Vintage Weathered Teak	15'-8 1/4"	1	rip to 1.66"
Stair stringers (end:right)	2x12	10'-6 1/4"	5	9 risers @ 7.333" · 8 treads @ 11.66" · stringers 12" OC
DROP (2)2x10 SYP W beam	2x10	5'-11"	2	y -8'-6"; posts at 1'-0 1/2" / 4'-11 1/2"
Posts under DROP (2)2x10 SYP W	6x6	6'-2 1/2"	2	field-measure each
DROP (2)2x10 SYP W+N+B+P beam	2x10	36'-11"	6	y 5'-4 1/2"; posts at 1'-0 1/2" / 6'-0" / 10'-6" / 15'-9" / 21'-0" / 28'-5 3/4" / 35'-11 1/2"; pieces 15'-8 1/2" · 12'-8 3/4" · 8'-5 3/4", spliced over posts
Posts under DROP (2)2x10 SYP W+N+B+P	6x6	6'-2 1/2"	7	field-measure each
Outer border -1"-37'-1"	Vintage Weathered Teak square	37'-1 15/16"	1	mitre at the corners; dividers on the doubled joist
Border end:left	Vintage Weathered Teak square	30'-1"	1	mitre at the corners; dividers on the doubled joist
Border end:right	Vintage Weathered Teak square	10'-7"	1	mitre at the corners; dividers on the doubled joist
Stair treads (end:right)	Vintage Weathered Teak	4'-0"	16	2 boards per tread, nosing 3/4" over the riser

MEMBER	STOCK	LENGTH	QTY	NOTE
	square			
Stair risers (end:right)	riser board	4'-0"	9	rip to 7.33" less tread thickness
Left fascia (w)	fascia	12'-0"	1	flush under the board nose; full board at the front corners, short piece at the house
Left fascia (w)	fascia	12'-0"	1	flush under the board nose; full board at the front corners, short piece at the house
Left fascia (w)	fascia	6'-0 1/2"	1	flush under the board nose; full board at the front corners, short piece at the house
Right fascia (w)	fascia	12'-0"	1	flush under the board nose; full board at the front corners, short piece at the house
Right fascia (w)	fascia	12'-0"	1	flush under the board nose; full board at the front corners, short piece at the house
Right fascia (w)	fascia	6'-0 1/2"	1	flush under the board nose; full board at the front corners, short piece at the house
Front fascia (w)	fascia	6'-1"	1	flush under the board nose; full board at the front corners, short piece at the house
Left fascia (n)	fascia	7'-6 1/2"	1	flush under the board nose; full board at the front corners, short piece at the house
Right fascia (n)	fascia	7'-6 1/2"	1	flush under the board nose; full board at the front corners, short piece at the house
Front fascia (n)	fascia	4'-7"	1	flush under the board nose; full board at the front corners, short piece at the house
Left fascia (b)	fascia	7'-6 1/2"	1	flush under the board nose; full board at the front corners, short piece at the house
Right fascia (b)	fascia	7'-6 1/2"	1	flush under the board nose; full board at the front corners, short piece at the house
Front fascia (b)	fascia	10'-7"	1	flush under the board nose; full board at the front corners, short piece at the house
Left fascia (p)	fascia	10'-6 1/2"	1	flush under the board nose; full board at the front corners, short piece at the house
Right fascia (p)	fascia	10'-6 1/2"	1	flush under the board nose; full board at the front corners, short piece at the house
Front fascia (p)	fascia	12'-0"	1	flush under the board nose; full board at the front corners, short piece at the house
Front fascia (p)	fascia	4'-1"	1	flush under the board nose; full board at the front corners, short piece at the house

THE STACK internal

Materials (raw)	\$32,171.11
Materials × 1.15	\$36,996.78
Sales tax 4.00% on factored materials	\$1,479.87
Labor (rate card)	\$25,824.50

Work — carries the margin	\$64,301.15
General conditions at cost	\$1,892.00
Cost	\$66,193.15
Sell — check or ACH at 42.5% GM	\$113,720 · \$240.42/SF
Sell at the 40% floor	\$109,061
Financed ÷ 0.93	\$122,280 · \$1,419/mo at 6.99% × 10 yr
Gross profit	\$47,527
Engineering — outside the price, at cost	\$1,800-\$3,000

Labor

LINE	QTY	UNIT	RATE	EXT
Demolition — existing deck	473	SF	\$2.00	\$946.00
Concrete piers (dig, form, pour)	9	pier	\$175.00	\$1,575.00
Frame	473	SF	\$10.00	\$4,730.00
Decking & fascia	473	SF	\$8.00	\$3,784.00
Railing	72.5	LF	\$20.00	\$1,450.00
Drink rail add-on	72.5	LF	\$5.00	\$362.50
Extra beam set	1	set	\$200.00	\$200.00
Stairs (end:right)	9	riser	\$150.00	\$1,350.00
Porch cover — frame, sheath, roof, ceiling	318	SF	\$28.00	\$8,904.00
Porch cover — post blocking in the deck frame	1	lot	\$300.00	\$300.00
Porch cover — standing seam steel in place of shingles (panels, trims, headwall, snow bar)	318	SF	\$6.50	\$2,067.00
Porch cover — 5" gutter + downspouts hung	26	LF	\$6.00	\$156.00

General conditions — at cost, no margin

ITEM	AMOUNT	WHY
General conditions	\$1,892	\$4/SF x 473 SF

What the price includes — sell values

ITEM	VALUE
Demolition & haul-off	\$1,645
Foundation & structure	\$28,678
Decking & fascia	\$33,484
Railing	\$6,272
Stairs	\$5,645
Weathered Teak drink rail on the rail	\$2,569

ITEM	VALUE
Porch cover — shed roof on 6x6 cedar posts, standing seam steel roof with snow retention, gutter and downspouts, Hardie soffit, fascia and rakes	\$33,535
Site & project services	\$1,892
Total, check or ACH	\$113,720
Total, financed	\$122,280

Open: GSX rule: 12.5% dealer fee is added manually to financed quotes; the 7% check/ACH spread does not cover it — owner to confirm whether the retail line absorbs it (open, 7 Sep 2026)

THE QUOTE homeowner-facing · facts only

QUOTE · PRE-ENGINEERING

1675 SUMMIT POINT CT — DECK WITH PORCH COVER

2x10 SYP frame at 12", (2)2x10 beam, 6x6 posts — on 9 concrete piers.
 TimberTech Vintage Weathered Teak decking, Cinch rail with a Weathered Teak drink rail.

473 SF · 4 zones · **8'-0"** above grade, engineered · **30 psf** snow design
 Prepared for William Wright · 1675 Summit Point Ct, Colorado Springs

PRICE

Total investment \$122,280 — financed, no money down

- 12 months no payments, no down payment
- 18 months no payments, no down payment
- 6.99% for 10 years — about \$1,419/month

Check or ACH: \$113,720 (7% savings)

WHAT THE PRICE INCLUDES

ITEM	VALUE
Demolition & haul-off	\$1,645
Foundation & structure	\$28,678
Decking & fascia	\$33,484
Railing	\$6,272
Stairs	\$5,645
Weathered Teak drink rail on the rail	\$2,569
Porch cover — shed roof on 6x6 cedar posts, standing seam steel roof with snow retention, gutter and downspouts, Hardie soffit, fascia and rakes	\$33,535
Site & project services	\$1,892
Total, check or ACH	\$113,720
Total, financed	\$122,280

Engineering — \$1,800 to \$3,000. Stamped drawings by a Colorado engineer (30 psf snow). GSX provides the engineer and bills the engineering at cost, with no markup. You own the stamped set. It is separate from the deck price above.

INCLUDED — WHAT IT IS

ELEMENT	SELECTION
Decking	
Railing	
Frame	40 2x10 #1 True Frame Joist SYP GC @ 12" OC; 2-ply 2x10 front and sides; DROP (2)2x10 SYP
Foundation	
Design load	
Hardware	

PLAN

4 zones · 473 SF · 37'-0" along the house · 8'-0" above grade · 72.5 LF Satin Black rail

- **W · Wing — 6' at the top wall, 30' deep, angled bay cuts its inner edge — 6'-0" x 30'-0".**
- **N · Under the short wall beside the chimney — 4'-6" x 7'-6".**
- **B · Chimney bay — 10'6" brick chimney 3' proud — 10'-6" x 7'-6".**
- **P · Porch bay under the cover — 16'-0" x 10'-6".**

Zones are named left to right standing in the yard facing the house.

- Stair end:right: 9 risers @ 7.33", 8 treads, 5 stringers, 4'-0" wide

SCHEDULE

1. Engineering & ordering (2-3 weeks). Stamped drawings, materials ordered, samples approved.
2. Day 1 — protection, utilities located (811), old deck out.
3. Days 2-3 — layout, 9 piers dug and poured; cure.
4. Days 4-6 — posts and beams set.
5. Days 7-10 — frame, flashing at every wall.
6. Days 11-12 — decking, borders first.
7. Days 13-14 — Cinch rail and drink rail.
8. Day 15 — stairs.
9. Day 16 — final clean; end of construction.

NEXT STEP

Engineering first. This is a quote: the numbers depend on the stamped engineering, so the first step is engineering. GSX provides the Colorado engineer and supplies the design package; you pay GSX the engineer's cost at no markup

and you own the stamped set. When the stamped set is in hand, GSX issues a fixed-price proposal on these numbers with the payment terms.

Quote, not a contract: a fixed-price proposal follows the stamped engineering. Quote numbers hold 30 days. Renders and plan are design intent; the stamped engineering set governs structure, dimensions and locations.

RENDERS 3D model • design intent • timbers shown as specified



From the yard



From the front corner




Standing on the deck



Under the deck — posts, beams, footings


ISOMETRICS

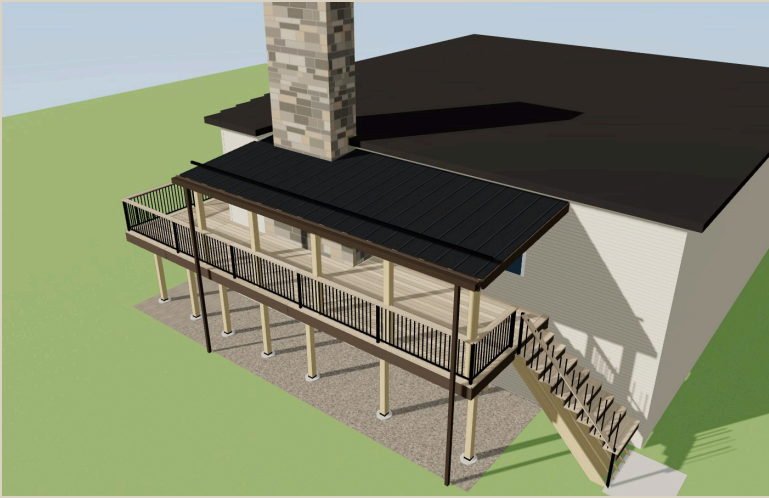

Isometric



Exploded — every layer

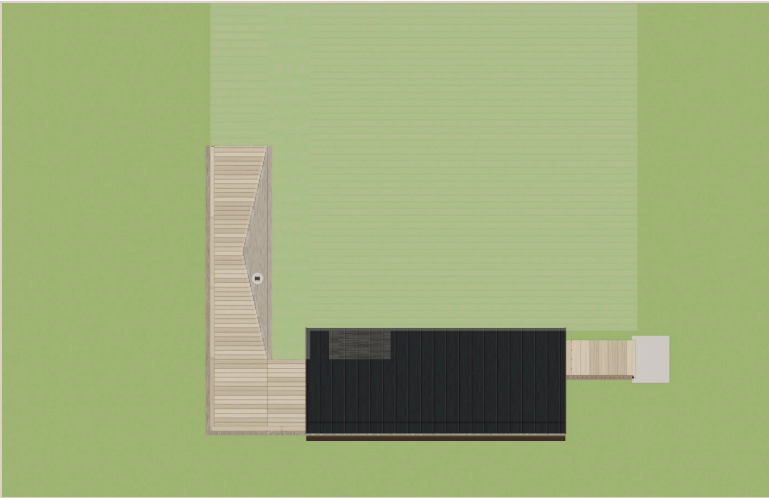

Plan from above

DRAWING SET G · S · A · D sheets — permit set with G-001 on top

▼ **G-001** General notes · design criteria

PROJECT

1675 Summit Point Ct — Deck with Porch Cover
1675 Summit Point Ct, Colorado Springs CO 80919
Prepared for William Wright
473 SF · 8'-0" above grade · 4 zones

DESIGN CRITERIA

Deck live load	40 psf uniform (IRC Table R301.5); guards 200 lb concentrated / 50 plf
Ground snow	30 psf (ground; deck design uses the larger of snow and live) — 40 psf live governs
Dead load	10 psf deck · 15 psf porch cover (standing seam steel on sheathing, Hardie soffit; 12 psf actual, 15 used) carried on the deck posts
Roof snow (cover)	30 psf flat-roof design snow (PPRBD minimum 30 psf), drift at the house wall per ASCE 7 Ch. 7
Design total	50 psf on the deck · cover posts add roof snow + dead to the deck frame and footings (engineered)
Wind	115 mph Vult, Exposure C, Risk Cat. II (ASCE 7-16) — confirm special wind region
Frost depth	2'-6" (footings bear below)
Soil bearing	1,500 psf presumptive (IRC R401.4.1) — no soils report
Seismic	B
Wildfire (WUI)	Ignition-resistant construction: Class A / WUI-listed decking (TimberTech Advanced PVC), noncombustible rail (steel), fiber-cement skirt, soffit and fascia, 26 ga flashing at every wall, Class A noncombustible standing seam steel roof on the cover with metal eave / rake / 2021 IRC as amended by Pikes Peak Regional Building Dept; IRC R507 decks; ASCE 7-16 loads; IWUIC / Colorado Springs Wildland-Urban Interface Code; Tables R507.5 / R507.6 / R507.4 / R507.9
Codes	
Engineering	Stamped structural set by a Colorado PE required — the stamped set governs

STRUCTURE

Footings	24" concrete piers 3'-0" deep
Posts	9 x 6x6
Beams	DROP (2)2x10 SYP W: 5'-11", 2 posts at 1'-0 1/2" / 4'-11 1/2" (worst 2,052 lb); DROP (2)2x10 SYP W+N+B+P: 36'-11", 7 posts at 1'-0 1/2" / 6'-0" / 10'-6" / 15'-9" / 21'-0" / 28'-5 3/4" / 35'-11
Joists	40 2x10 #1 True Frame Joist SYP GC @ 12" OC
Rims	2-ply 2x10 front and sides
Ledger	2x10 ledger x 37'-0" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 38 fasteners
Decking	TimberTech Vintage Weathered Teak — 113 rows parallel to the house, picture frame in Vintage Weathered Teak, 3/16" gaps, Cortex
Rail	Cinch 36" Satin Black: 10 bays, 11 posts, 72.5 LF + drink rail

SHEET INDEX

G-001	General notes · design criteria
A-001	Isometric · renders
S-100	Foundation plan
S-101	Framing plan
A-101	Decking plan
A-201	Railing plan + elevation
A-301	Section + front elevation
D-501	Details
T-400	Build steps (build set)
T-700	Order + schedules (takeoff)

SITE


Rear / front lot line: deck edge 62.8' from the line, 25' required
Side lot line: deck edge 7.6' from the line, 5' required
Easement: Check the plat for rear/side utility + drainage easements...
Parcel 7311205063 (0.389 ac / 16,961 sf), zoning PDZ HS (Planned Development Zone, dev. plan CPC P 85-68(HS)); overlays WUI-O and Hillside HS-O. Setbacks below are the R-1 6000 / HS base standards (rear 25', side 5') — VERIFY against the recorded development plan and an ILC before layout. Distances are scaled from City GIS building/parcel lines (existing deck footprint): rear line ~62.8', east side line ~7.6' at the stair end, west side ~7.8'. Hillside overlay: grading/retaining review if footing excavation disturbs the slope. WUI-O: ignition-resistant deck surface (Class A PVC), 1/8" ember screening, no combustible skirting.

FLAGS (INTERNAL — remove before the permit submittal)

ENGINEER	roof over the deck — roof snow + deck loads on the posts and...
CODE	standing seam roof over the deck — metal sheds its snow load onto...
CODE	concrete piers bear 2'-6" below grade — frost depth 2'-6" for...
CODE	WUI zone: Vintage is Ignition Resistant, Class A, WUI — keep the...
CODE	end:right stair: 9 risers — graspable handrail 34~38" on at least...

▼ S-100 Foundation plan

Footings, posts and beam lines with the footing schedule; beams dashed (below the joists)

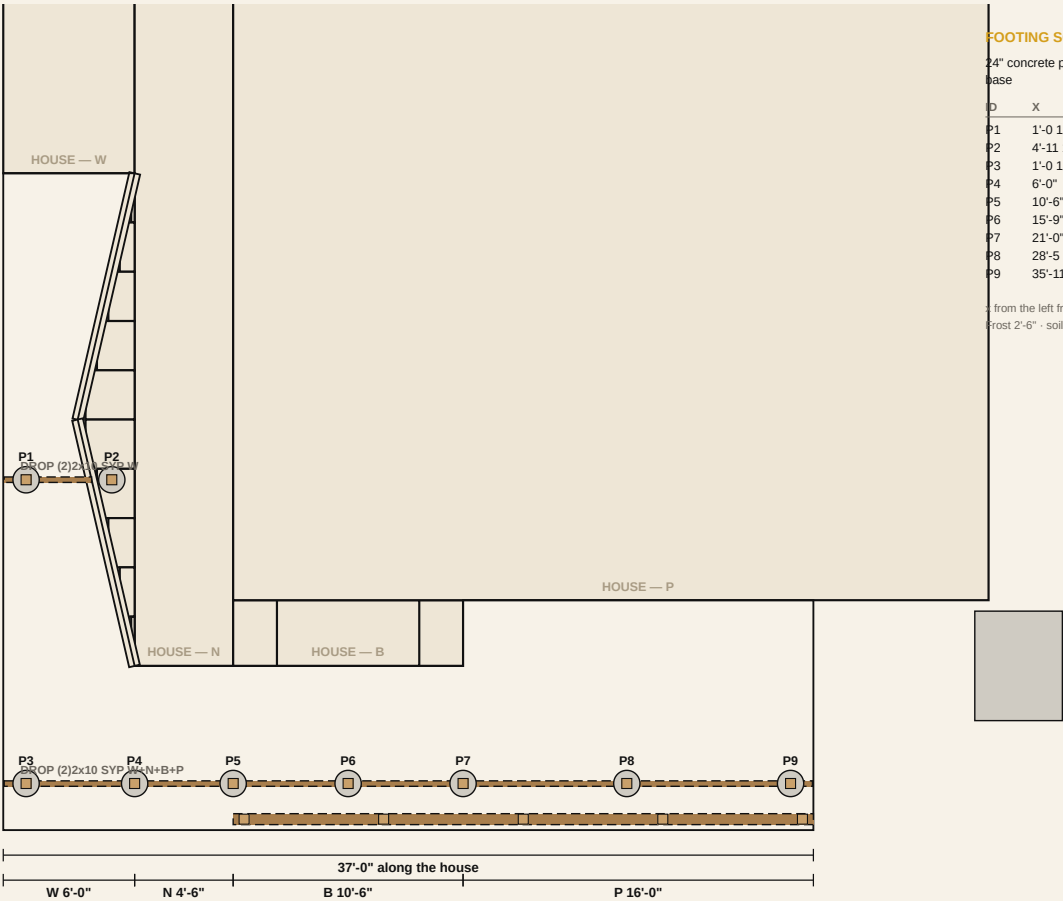

FOOTING SCHEDULE

24" concrete pier x 3'-0", wet-set standoff				
base				
ID	X	Y	ZONE	LOAD
P1	1'-0 1/2"	-8'-6"	W	2,052 lb
P2	4'-11 1/2"	-8'-6"	W	2,052 lb
P3	1'-0 1/2"	5'-4 1/2"	W	1,576 lb
P4	6'-0"	5'-4 1/2"	W	2,143 lb
P5	10'-6"	5'-4 1/2"	N	1,158 lb
P6	15'-9"	5'-4 1/2"	B	1,247 lb
P7	21'-0"	5'-4 1/2"	B	1,512 lb
P8	28'-5 3/4"	5'-4 1/2"	P	2,337 lb
P9	35'-11 1/2"	5'-4 1/2"	P	1,481 lb


x from the left frame face facing the house; y from the reference wall.
Frost 2'-6" · soil 1,500 psf · worst post 2,337 lb

Plan · not to scale · house at the top · dimensions govern

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

▼ S-101 Framing plan

Ledger, joists, rims, blocking, beams; every member in the model — the cut list is on T-600

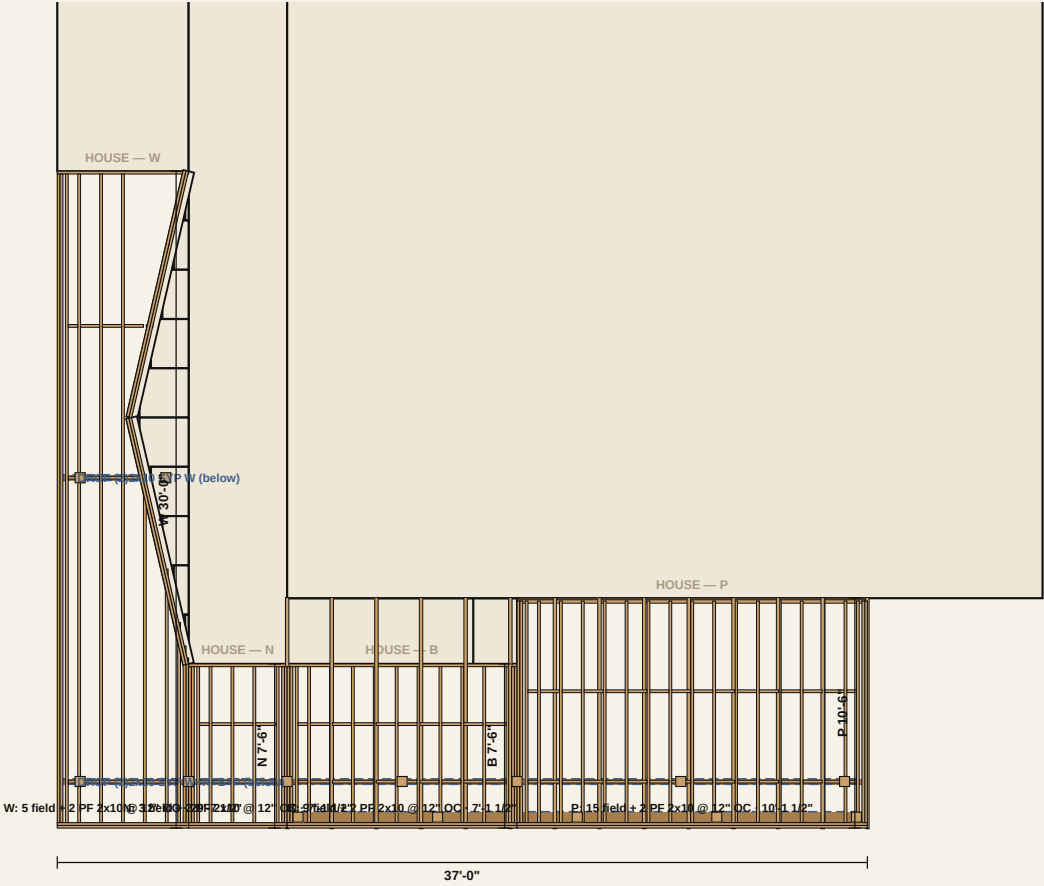

FRAMING NOTES


- 40 2x10 #1 True Frame Joist SYP GC @ 12" OC
- 2-ply 2x10 front and sides
- 2x10 ledger x 37'-0" total - LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end - 38
- blocking one row over the beam, staggered
- G-Tape 2" every joist, PF joist, blocking and the ledger top - 4" on both rims and the beam(s)
- DROP (2)2x10 SYP W: 5'-11", 2 posts at 1'-0 1/2" / 4'-11 1/2" (worst 2,052 lb); DROP (2)2x10 SYP W+N+B+P: 36'-11", 7
- Connectors:
- Simpson LUS28Z face-mount hanger 2x8/2x10: 80
- Simpson HUCQ210-2-SDS concealed-flange double 2x10 hanger (SDS screws included): 16
- Simpson DTT1Z lateral tie kit w/ SDS screws: 16
- Simpson H2.5AZ hurricane tie (joists to the drop beam, hidden): 57
- Simpson BC46Z post cap 6x post / 4x beam: 9
- 7/16" x 4-1/2" HDG hex bolt + nut + 2 washers: 28
- Simpson LSCZ adjustable stair-stringer connector: 5

Plan · not to scale · house at the top · dimensions govern

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

▼ A-101 Decking plan

Every board, border and divider as it lays; rail posts shown for the pockets

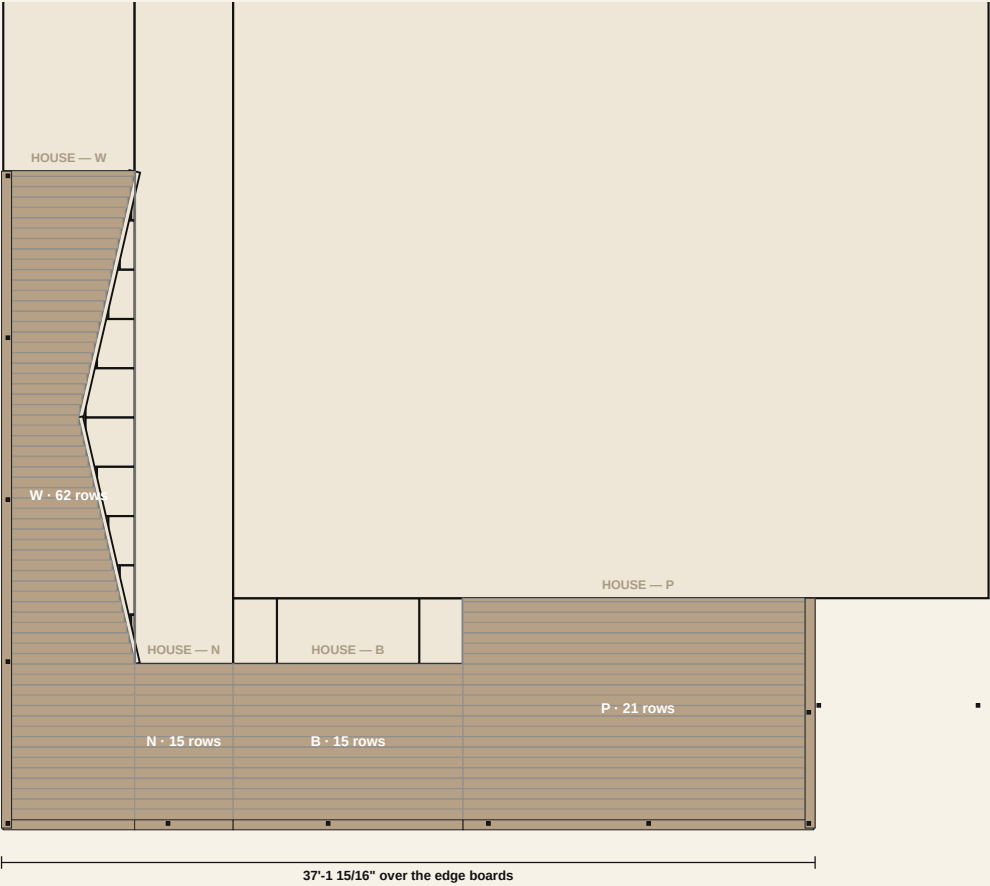

DECKING

Field: TimberTech Vintage Weathered Teak, 5.5" x 1", 3/16" gaps


Border: Vintage Weathered Teak

Boards run parallel to the house; edge overhang 1" over the fascia

Cortex face screws with color-matched plugs: 2 per board at every joist and at both ends of every run, color-matched plugs (2394 field + 124 border/divider)

Rows per zone: W 62 · N 15 · B 15 · P 21 (rip at the house)

▼ A-201 Railing plan + elevation

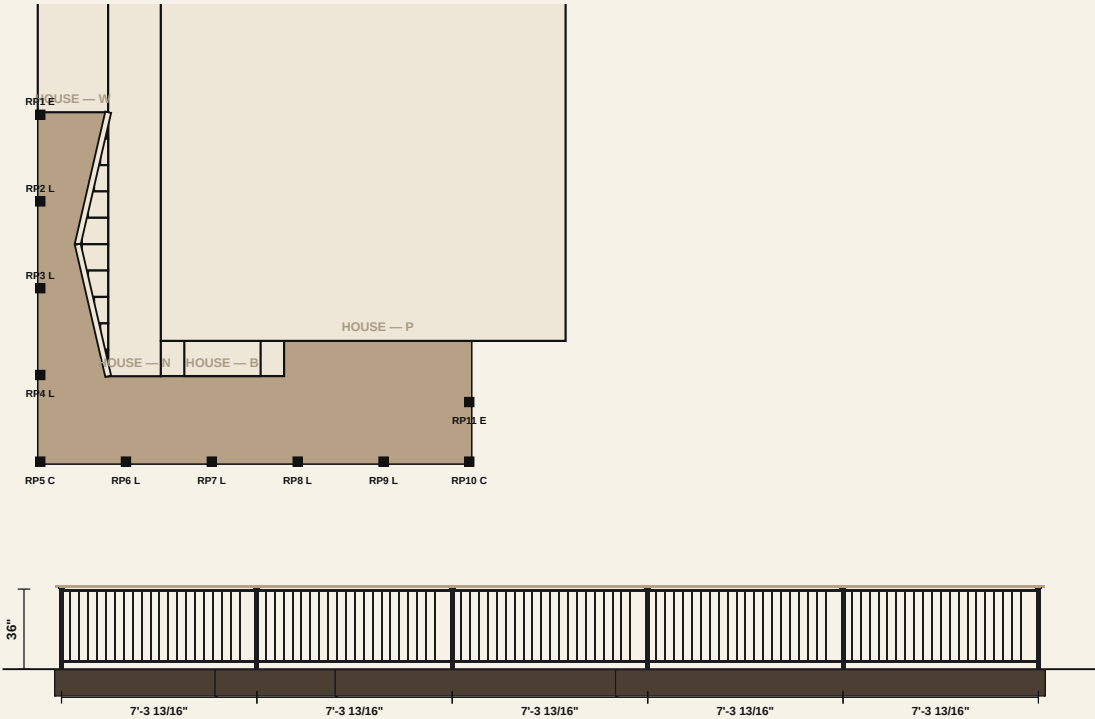

RAILING

Cinch 36" Satin Black: 10 bays, 11 posts, 72.5 LF + drink rail

Cinch 36" — 11 posts (2 CORNER, 2 END, 7 LINE) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post; drink rail board on Cinch drink-rail brackets, mitred at every turn


Bays: end:left 7'-4 3/4" · end:left 7'-4 3/4" · end:left 7'-4 3/4" · end:left 7'-4 3/4" · front:W+N+B+P 7'-3 13/16" · front:W+N+B+P 7'-3 13/16" · front:W+N+B+P 7'-3 13/16" · front:W+N+B+P 7'-3 13/16" · front:W+N+B+P 7'-3 13/16"

Guard 36" min above the deck; openings under 4" (IRC R312). Rail LF for labor = deck-edge LF of actual rail.

Plan above · elevation of the outer edge below

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

▼ A-301 Section + front elevation

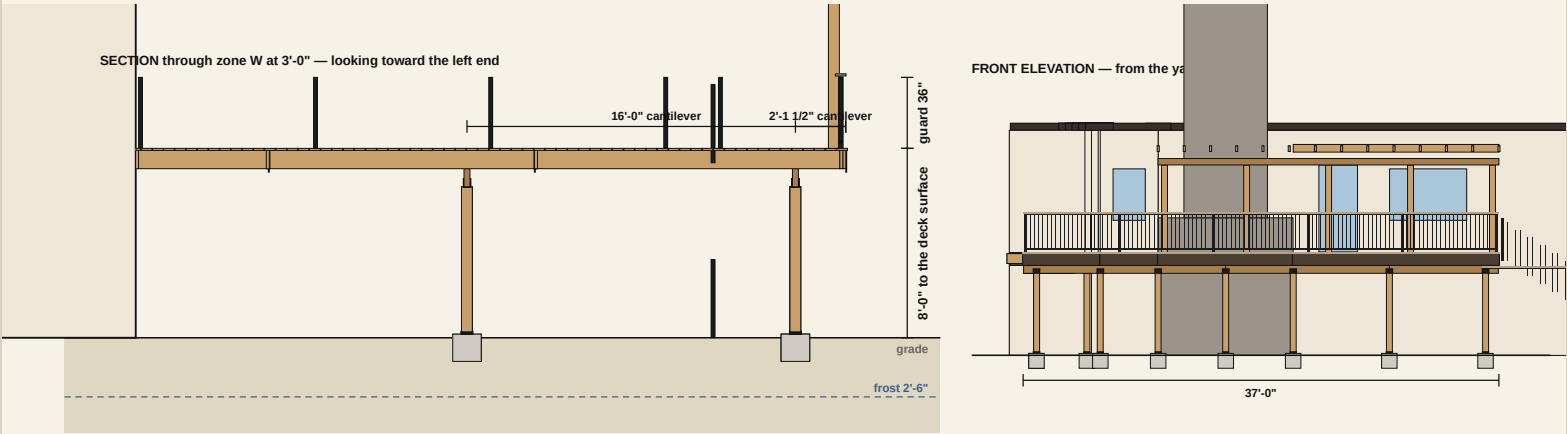

SECTION NOTES

Deck surface 8'-0" above grade; guard 36" where the drop exceeds 30"

DROP (2)2x10 SYP W: 5'-11", 2 posts at 1'-0 1/2" / 4'-11 1/2" (worst 2,052 lb); DROP (2)2x10 SYP W+N+B+P: 36'-11", 7 posts at 1'-0 1/2" / 6'-0" / 10'-6" / 15'-9" / 21'-0" / 28'-5 3/4" /

Posts 9 x 6x6 on 24" concrete piers 3'-0" deep

2x10 ledger x 37'-0" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 38 fasteners


G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)

Section left · elevation right · not to a common scale

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.


▼ D-501 Details

1 LEDGER AT THE HOUSE

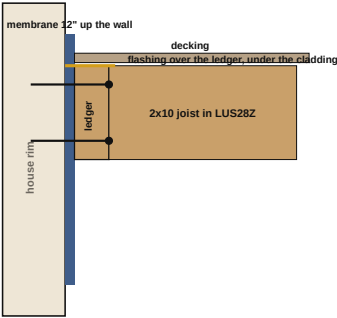


2x10 ledger x 37'-0" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 38 fasteners · 26 ga wall flashing (WUI)

2 POST · BEAM · CAP

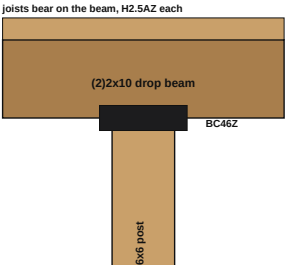


DROP (2)2x10 SYP W: 5'-11", 2 posts at 1'-0 1/2" / 4'-11 1/2" (worst 2,052 lb); DROP (2)2x10 SYP W+N+B+P: 36'-11", 7 posts at 1'-0 1/2" / 6'-0" / 10'-

3 FOOTING · POST BASE

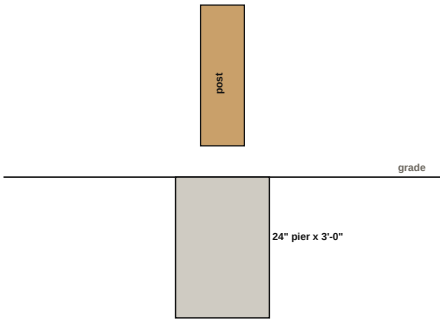


4 RAIL POST · GUARD

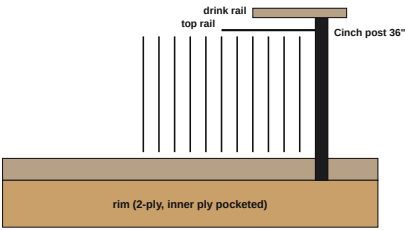

Cinch 36" — 11 posts (2 CORNER, 2 END, 7 LINE) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post; drink rail board on Cinch drink-rail brackets, mitred at every turn

5 DECK EDGE · BORDER

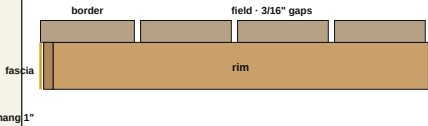

Cortex face screws with color-matched plugs: 2 per board at every joist and at both ends of every run, color-matched plugs (2394 field + 124 border/divider)

6 BLOCKING

Blocking one row over the beam, staggered up and down so every block can be end-nailed.

Schematic details, not to scale

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

BUILD SET T-400 series · goes in · how · check



Step 1 · Footings — 9 concrete piers 24" x 3.0'

T-400 · Step 1 · Footings

GOES IN

- (9) 24" form tube x 3'-0" (bearing 2'-6" below grade, frost 2'-6")
- (144) Concrete mix 80 lb
- (9) Simpson ABU66Z standoff post base 6x6 (concrete) wet-set 1/2" anchor
- (1) Stair landing pad (end:right stair) — 4" slab, stringers bear on the pad

HOW

- Call 811 and locate before any hole or pin. Strip the existing deck first.
- Pull the beam lines from the house wall: DROP (2)2x10 SYP W at -8'-6" from the reference wall, posts at 1'-0 1/2" / 4'-11 1/2"; DROP (2)2x10 SYP W+N+B+P at 5'-4 1/2" from the reference wall, posts at 1'-0 1/2" / 6'-0" / 10'-6" / 15'-9" / 21'-0" / 28'-5 3/4" / 35'-11 1/2".
- Dig and form 9 piers 24" x 3'-0", pour, set the standoff bases wet.

CHECK

- Footings on the layout within 1/2"; bearing on undisturbed soil
- Frost depth met
- Photos before backfill



Step 2 · Posts — 6x6 #2 GC on ZMAX bases

T-401 · Step 2 · Posts**GOES IN**

- (9) 6x6x8 #2 GC
- (9) Simpson ABU66Z standoff post base 6x6 (concrete) wet-set 1/2" anchor

HOW

- 6x6 posts on the bases; cut so the beam top lands at the joist bottom (drop beam) or the joist top (flush beam): DROP (2)2x10 SYP W posts 6'-2 1/2" / DROP (2)2x10 SYP W+N+B+P posts 6'-2 1/2" — field-measure each.
- Plumb both ways, brace, then the caps go on with the beams.

CHECK

- Posts plumb to a string; tops on the beam line
- No post in ground contact without a standoff



Step 4 · Beams — DROP (2)2x10 SYP W (2 posts) · DROP (2)2x10 SYP W+N+B+P (7 posts)

T-403 · Step 4 · Beams**GOES IN**

- (1) 2x6x12 #1 True Frame Joist SYP GC
- (9) 6x6x8 #2 GC
- (9) Simpson BC46Z post cap 6x post / 4x beam

HOW

- DROP (2)2x10 SYP W: 5'-11" one piece, 2 posts @ 3'-11" max
- DROP (2)2x10 SYP W+N+B+P: 36'-11" in 3 pieces spliced over posts, 7 posts @ 7'-5 3/4" max
- Crown up, strung straight, caps screwed off with the SDS screws in the box.

CHECK

- Beam top = joist bottom (drop) / joist top (flush)
- Splices land on a post; caps fully fastened



Step 5 · Frame — 2x10 joists at 12", rims, ledger, blocking over the beam

T-404 · Step 5 · Frame

GOES IN

- (51) 2x10x12 #1 True Frame Joist SYP GC
- (3) 2x10x16 #1 True Frame Joist SYP GC
- (11) 2x10x24 #1 True Frame Joist SYP GC
- (2) 2x10x16 #1 True Frame Joist SYP GC
- (2) 2x10x14 #1 True Frame Joist SYP GC
- (2) 2x10x10 #1 True Frame Joist SYP GC
- (80) Simpson LUS28Z face-mount hanger 2x8/2x10
- (16) Simpson HUCQ210-2-SDS concealed-flange double 2x10 hanger (SDS screws included)
- (2) Camo 9ga HDG hanger nail 3" 5 lb (~350)
- (2) Camo 9ga HDG hanger nail 1-1/2" 5 lb (~650)
- (1) FastenMaster LedgerLOK 3-5/8" 50 ct
- (57) Simpson H2.5AZ hurricane tie (joists to the drop beam, hidden)
- (1) Grace Vycor Deck Protector 12" x 75' (wall membrane behind ledger + side rims)
- (7) Aluminum L-flashing 10' (over ledger + side rims)

HOW

- 2x10 ledger x 37'-0" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 38 fasteners
- W: 5 joists @ 12" OC x 29'-7 1/2"; N: 3 joists @ 12" OC x 7'-1 1/2"; B: 9 joists @ 12" OC x 7'-1 1/2"; P: 15 joists @ 12" OC x 10'-1 1/2". Crown up, hangers at the ledger.
- Blocking one row over the beam, staggered.
- G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)

CHECK

- Frame square: diagonals within 1/8"
- Every hanger fully nailed; ledger fasteners per the schedule
- Tape continuous; photos of the ledger, hangers and footings before decking

T-405 · Step 6 · Decking

GOES IN

- (92) TimberTech Vintage Weathered Teak 1x6x12 Square Edge
- (21) TimberTech Vintage Weathered Teak 1x6x16 Square Edge
- (1) TimberTech Vintage Weathered Teak 1x6x12 Square Edge — rip boards at the house
- (1) TimberTech Vintage Weathered Teak 1x6x16 Square Edge — borders
- (2) TimberTech Vintage Weathered Teak 1x6x20 Square Edge — borders
- (15) Deck skirt — HardieTrim 4/4 x 12 x 12' smooth ColorPlus Timber Bark (wraps the double rim, in place of the composite fascia)
- (1) Color-matched trim screws for HardieTrim, 100 ct (Timber Bark)

HOW

- Cortex face screws with color-matched plugs: 2 per board at every joist and at both ends of every run, color-matched plugs (2394 field + 124 border/divider)
- Borders first, then the field.
- Rows per zone: W 62 · N 15 · B 15 · P 21. Borders and dividers first, then the field rows from the outer edge toward the house.

CHECK

- 3/16" gaps held
- No cut end shows at the outer edge
- Color: every board from the same run



Step 6 · Decking — TimberTech Vintage Weathered Teak, hidden fasteners



Step 7 · Rail — Cinch 36" Satin Black, drink rail on top

T-406 · Step 7 · Rail

GOES IN

- (1) Cinch HD Rail 6' x 36" level panel Satin Black
- (9) Cinch HD Rail 8' x 36" level panel Satin Black (welded steel balusters, brackets on, cut to bay)
- (2) Cinch 2" CORNER post 36" Satin Black w/ brackets, cap, skirt
- (2) Cinch 2" END post 36" Satin Black w/ brackets, cap, skirt
- (7) Cinch 2" LINE post 36" Satin Black w/ brackets, cap, skirt
- (5) Drink rail — TimberTech Vintage Weathered Teak 1x6x16 Square Edge laid flat on the top rail, 72.5 LF, mitred at every turn
- (10) Cinch drink-rail bracket kit, black — per panel

HOW

- Cinch 36" — 11 posts (2 CORNER, 2 END, 7 LINE) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post; drink rail board on Cinch drink-rail brackets, mitred at every turn
- Drink rail on TimberTech drink-rail brackets, mitred at every turn, plugs color-matched.

CHECK

- Top of rail 36" above the decking; posts plumb
- Cables tensioned / balusters under 4" clear
- End of construction



Step 8 · Your room

T-407 · Step 8 · Porch cover

GOES IN

- (5) 6x6 x 10' Western red cedar post (cover)
- (4) 2x10x16 #1 SYP — cover beam (2 ply)
- (2) 2x10x16 #1 SYP — cover ledger on the house
- (20) 2x8x12 #1 SYP — cover rafters @ 16" OC
- (4) 2x8x16 #1 SYP — cover fascia / sub-fascia
- (11) 7/16" OSB roof sheathing 4x8
- (318) Standing seam roof — 24 ga steel 16" snap-lock panels x 12.0' (color TBD, PVDF), 20 panels
- (2) High-temp self-adhered ice & water underlayment, 2 sq roll (under every metal panel)
- (3) Standing seam eave / drip trim 10', color-matched
- (3) Standing seam gable / rake trim 10', color-matched
- (3) Headwall (ledger) flashing with Z-closure 10', color-matched — into the house siding / counterflash
- (6) Foam + metal closure strips at eave and headwall, 10'
- (1) Panel clips + pancake-head screws, box of 250
- (1) Color-matched #10 woodgrip trim screws w/ washers, 250

HOW

- Cover ledger on the house at the top of the pitch, LedgerLOK 2 rows; 6x6 cedar posts on the deck over blocked joists, (2)2x10 beam at the rail line; 2x8 rafters @ 16" OC with hurricane ties, 12.0' with the 18" overhang; 2x8 sub-fascia and OSB.
- High-temp self-adhered underlayment over every sheet, headwall flashing counterflashed into the house wall, eave trim, then the 24 ga snap-lock panels one piece eave to headwall — clips 18" OC

on each seam, no face screws in the field; rake trim and closures last; snow retention bar clamped to the seams 12-18" above the low eave, the full width.

- 5" K gutter on the low eave, hangers 24" OC, 1/16" per foot toward the outlets; 2x3 downspouts strapped to the cover posts, offset past the deck edge, down the deck post to a splash block 3'+ from the footing.
- Ceiling: HardieSoffit 4x10 cedarmill Timber Bark panels 6" OC stainless ring-shank at every rafter; HardieTrim 4/4 x 7.25 rustic Timber Bark fascia and rakes over the 2x8 sub-fascia, color-matched trim screws.

CHECK

- Ledger flashed and counterflashed — hose test before the ceiling closes
- Posts plumb over blocking, beam level, rafters tied
- Panels straight, seams engaged full length, no oil-canning; snow bar continuous
- Gutter falls to the outlets, downspouts discharge away from the footings

3D MODEL



The interactive 3D model lives at the online version of this document.

GS Exterior Experts · Deck Division

Renders and drawings are design intent; the stamped set governs on engineered jobs. Estimated unit prices are marked in the order.