

10 x 10 Deck · TimberTech Prime+ Sea Salt Gray

10' x 10' · 10' high · ledger one side · (2) 6x6 DF posts · 2x8 SYP @ 16" · 4x10 DF beam · Cinch black on three sides · Hardie skirt

CHECK OR ACH	FINANCED	MONTHLY	SQUARE FEET	FOOTINGS	RAIL
\$12,261	\$13,184	\$153	96	2	29 LF

DESIGN READS

Frame	9'-9" x 9'-7" outside to outside
Deck	9'-11 1/8" x 9'-8 1/16" over fascia · 96 SF · 10'-0" above grade
Joists	8 2x8 #1 True Frame Joist SYP GC @ 16" OC x 9'-2 1/2"
Rims	2-ply 2x8 front and sides
Beam	DROP 4x10 DF: 9'-8", 2 posts at 1'-6" / 8'-4 3/16" (worst 1,987 lb)
Posts	2 x 6x6 on DP-50/50
Load	50 psf (40 psf live governs) · engineered
Decking	TimberTech Prime+ Sea Salt Gray — 20 rows parallel to the house, picture frame in Prime+ Sea Salt Gray, 3/16" gaps, Camo EdgeClip
Rail	Cinch 36" Satin Black: 6 bays, 7 posts, 29 LF

- nominal 10'-0" x 10'-0" -> frame 9'-9" x 9'-7": field boards cut to 9'-0", 20 full rows, deck over fascia 9'-11 1/8" x 9'-8 1/16"
- 2'-1 3/4" cantilever past the drop beam exceeds L/4 of the 7'-3 3/4" back-span — engineered condition (owner-directed)
- 4x10 DF beam: owner-placed posts give a 6'-10 3/16" span against 6'-3 3/16" allowable — engineer confirms
- Prime+ is scalloped — Cortex not approved; field is 100% hidden on Camo EdgeClips, board ends clipped on the PF joists

SITE & CODE FLAGS internal

STOP

ENGINEERING

DROP 4x10 DF post spacing 6'-10 3/16" exceeds allowable 6'-3 3/16" — add a post or upsize the beam IRC Table R507.5

ENGINEER	ENGINEERING	cantilever 2'-1 3/4" > L/4 of the 7'-3 3/4" back-span — owner-directed, in the stamped set IRC R507.5 / R507.6
CODE	ENGINEERING	posts over 8' (8'-2 1/16") — add diagonal knee bracing at each post (both directions at the corners) DCA6 / IRC R507.4
CHECK	SETBACK	rear setback not entered — confirm the required rear setback and the deck-to-line distance before the frame is laid out zoning
CHECK	SETBACK	side setback not entered — confirm the required side setback and the deck-to-line distance before the frame is laid out zoning
CHECK	FOOTING	Diamond Pier: pins 50" — locate utilities (811) before driving; bearing 1,987 lb/post vs 3,300 lb allowable (manufacturer chart, confirm)
CHECK	LEDGER	verify the rim board behind the ledger is solid 2x/LVL/engineered rim (not I-joist web or a hollow band) before the ledger fasteners go in IRC R507.9.1.1
CHECK	PRODUCT	Cinch rail on 3" posts — confirm the post SKU, price and bracket set; the order carries the stock post price supplier
INFO	LEDGER	lateral: 4 x DTT1Z (750 lb each) into house floor framing IRC R507.9.2
INFO	WIND	basic wind speed 115 mph — standard connectors
INFO	FIRE	Prime+: Not rated for fire zones — fine outside a WUI zone
INFO	SETBACK	no address on the spec — tax rate and jurisdiction defaults used

THE ORDER Decks & Docks · GSEXT1 · ship to the job

Lumber

NET	ORDER	UNIT	ITEM	WHY
15	16	ea	2x8x10 #1 True Frame Joist SYP GC	+1 cull (6 field joist · 2 PF joist · 2 left rim ply · 2 right rim ply · 2 front rim ply · ledger)
1	2	ea	2x8x12 #1 True Frame Joist SYP GC	+1 cull (blocking)
1	1	ea	4x10x10 Douglas Fir #2	exact (drop beam: DROP 4x10 DF)
2	2	ea	6x6x10 #2 GC	exact (yields 2 posts at ~8'-2 1/16")

Footings

NET	ORDER	UNIT	ITEM	WHY
2	2	ea	Diamond Pier DP-50/50 (head + 4 x 50" pins, plugs, caps)	exact — confirm stock
2	2	ea	Simpson ABA66Z adjustable post base 6x6 on the pier bolt	exact

Hardware

NET	ORDER	UNIT	ITEM	WHY
16	16	ea	Simpson LUS28Z face-mount hanger 2x8/2x10	exact (8 joists x 2 ends)
4	4	ea	Simpson HUCQ28-2-SDS concealed-flange double 2x8 hanger	exact (2 side rims x 2 ends) — confirm stock
1	1	box	Camo 9ga HDG hanger nail 3" 5 lb (~350)	96 needed of ~350
1	1	box	Camo 9ga HDG hanger nail 1-1/2" 5 lb (~650)	164 needed of ~650
1	1	box	FastenMaster LedgerLOK 3-5/8" 50 ct	11 needed
4	4	ea	Simpson DTT1Z lateral tie kit w/ SDS screws	exact (2 near each end of every ledger, into house floor framing)
10	10	ea	Simpson H2.5AZ hurricane tie (joists to the drop beam, hidden)	exact (8 joists + 2 rims at each drop beam)
2	2	ea	Simpson BC46Z post cap 6x post / 4x beam	exact
1	1	box	Simpson SD10212R100 #10 x 2-1/2" connector screw 100 ct	44 needed (bases 24 · caps 20)
1	1	box	GRK RSS #10 x 3-1/8" structural screw 100 ct	94 needed (laminations 66 · blocking 28)
14	16	ea	7/16" x 4-1/2" HDG hex bolt + nut + 2 washers	+2 (7 rail posts x 2)

Flashing & waterproofing

NET	ORDER	UNIT	ITEM	WHY
1	1	set	Ledger flashing set: SA membrane 6"x75' + (2) 10' alum. Z + end dams	exact
2	2	roll	Nichigo G-Tape 3035 2" x 65' black	92' needed of 130'
1	1	roll	Nichigo G-Tape 3035 4" x 65' black	38' needed of 65'

Decking

NET	ORDER	UNIT	ITEM	WHY
20	22	ea	TimberTech Prime+ Sea Salt Gray 1x6x12 Grooved	+2 (A: 20 rows @ 9'-0")
1	1	ea	TimberTech Prime+ Sea Salt Gray 1x6x12 Square Edge — borders	exact (right border 9'-8 1/16")
1	2	ea	TimberTech Prime+ Sea Salt Gray 1x6x20 Square Edge — borders	+1 (front border 9'-11 1/8" + left border 9'-8 1/16")

Fasteners

NET	ORDER	UNIT	ITEM	WHY
2	2	box	Camo EdgeClip 3/16" 410SS Black 90 ct	180 clips needed · 180 supplied
1	1	box	Starborn Cap-Tor xd 2-3/4" Epoxy Sea Salt Gray 350 ct	103 screws needed (first row 8 · border 56 · fascia 39)

Fascia

NET	ORDER	UNIT	ITEM	WHY
3	4	ea	Deck skirt — HardieTrim 4/4 x 12 x 12' smooth ColorPlus (color TBD) (wraps the double rim, in place of the composite fascia)	+1 (left fascia 9'-7 9/16" · right fascia 9'-7 9/16" · front fascia 9'-10 3/16")
1	1	box	Color-matched trim screws for HardieTrim, 100 ct ((color TBD))	32 color-matched screws, pre-drilled, 2 per joist line
1	1	kit	ColorPlus touch-up kit, (color TBD)	cut ends

Rail

NET	ORDER	UNIT	ITEM	WHY
6	6	ea	Cinch HD Rail 6' x 36" level panel Satin Black	exact (cut to 4'-3 1/2" / 4'-4 1/2")
2	2	ea	Cinch 3" CORNER post 36" Satin Black w/ brackets, cap, skirt	exact
2	2	ea	Cinch 3" END post 36" Satin Black w/ brackets, cap, skirt	exact
3	3	ea	Cinch 3" LINE post 36" Satin Black w/ brackets, cap, skirt	exact
1	1	ea	Rust-Oleum flat black touch-up (cut ends)	exact

FASTENER & CONNECTOR SCHEDULE

Ledger	2x8 ledger x 9'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 11 fasteners
Joist tape	G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)
Field	100% hidden — Camo EdgeClip 3/16" at every joist in every gap (9 bearing points x 20 gaps = 180); board ends clipped on the PF joists, never screwed
Face screws	Cap-Tor xd color-matched ONLY at: first row 1 per joist on the house edge · borders 2 per bearing point @ 16" · fascia 2 at each board end then alternate top/bottom every 12", pre-drilled
Rail	Cinch 36" — 7 posts (2 CORNER, 2 END, 3 LINE) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post

▼ Cut list

MEMBER	STOCK	LENGTH	QTY	NOTE
Field joists	2x8	9'-2 1/2"	6	@ 16" OC, crown up
Picture-frame joists	2x8	9'-2 1/2"	2	centre 5 1/4" from each frame face
Side rim plies	2x8	9'-2 1/2"	4	2-ply, laminated on the ground with RSS 2 rows @ 12" staggered
Front rim plies	2x8	9'-9"	2	inner ply takes the hangers; outer ply laminated after
Ledger	2x8	9'-9"	1	top at deck height less board thickness; membrane behind, flashing over
Blocking	2x8	1'-2 1/2"	7	1 row at 7'-5 1/4" from the wall

MEMBER	STOCK	LENGTH	QTY	NOTE
Field boards run A	Prime+ Sea Salt Gray	9'-0"	20	boards run parallel to the house
DROP 4x10 DF beam	4x10	9'-8"	1	y 7'-5 1/4"; posts at 1'-6" / 8'-4 3/16"
Posts under DROP 4x10 DF	6x6	8'-2 1/16"	2	field-measure each
Left border	Prime+ Sea Salt Gray square	9'-8 1/16"	1	mitre at the corners; dividers on the doubled joist
Right border	Prime+ Sea Salt Gray square	9'-8 1/16"	1	mitre at the corners; dividers on the doubled joist
Front border	Prime+ Sea Salt Gray square	9'-11 1/8"	1	mitre at the corners; dividers on the doubled joist
Left fascia	fascia	9'-7 9/16"	1	flush under the board nose; full board at the front corners, short piece at the house
Right fascia	fascia	9'-7 9/16"	1	flush under the board nose; full board at the front corners, short piece at the house
Front fascia	fascia	9'-10 3/16"	1	flush under the board nose; full board at the front corners, short piece at the house

THE STACK internal

Materials (raw)	\$3,696.68
Materials × 1.15	\$4,251.18
Sales tax 4.00% on factored materials	\$170.05
Labor (rate card)	\$2,408.00
Work — carries the margin	\$6,829.23
General conditions at cost	\$384.00
Cost	\$7,213.23
Sell — check or ACH at 42.5% GM	\$12,261 · \$127.72/SF
Sell at the 40% floor	\$11,766
Financed	\$13,184 · \$153/mo at 6.99% × 10 yr
Gross profit	\$5,048
Engineering — outside the price, at cost	\$1,800–\$3,000

Labor

LINE	QTY	UNIT	RATE	EXT
Diamond Pier install (replaces caisson)	2	pier	\$50.00	\$100.00
Frame	96	SF	\$10.00	\$960.00
Decking & fascia	96	SF	\$8.00	\$768.00

LINE	QTY	UNIT	RATE	EXT
Railing	29	LF	\$20.00	\$580.00

General conditions — at cost, no margin

ITEM	AMOUNT	WHY
General conditions	\$384	\$4/SF x 96 SF

What the price includes — sell values

ITEM	VALUE
Foundation & structure	\$4,600
Decking & fascia	\$4,222
Railing	\$3,055
Site & project services	\$384
Total, check or ACH	\$12,261
Total, financed	\$13,184

THE QUOTE homeowner-facing · facts only

QUOTE · PRE-ENGINEERING

10 X 10 DECK — TIMBERTECH PRIME+ SEA SALT GRAY

2x8 SYP frame at 16", 4x10 beam, 6x6 posts — on 2 Diamond Pier footings.
TimberTech Prime+ Sea Salt Gray decking, Cinch rail.

96 SF · 1 zone · **10'-0"** above grade, engineered · **30 psf** snow design

PRICE

Total investment \$13,184 — financed, no money down

- 12 months no payments, no down payment
- 18 months no payments, no down payment
- 6.99% for 10 years — about \$153/month

Check or ACH: \$12,261 (7% savings)

WHAT THE PRICE INCLUDES

ITEM	VALUE
Foundation & structure	\$4,600
Decking & fascia	\$4,222
Railing	\$3,055
Site & project services	\$384
Total, check or ACH	\$12,261
Total, financed	\$13,184

Engineering — \$1,800 to \$3,000. Stamped drawings by a Colorado engineer (30 psf snow). GSX provides the engineer and bills the engineering at cost, with no markup. You own the stamped set. It is separate from the deck price above.

INCLUDED — WHAT IT IS

ELEMENT SELECTION

Decking	TimberTech Composite Prime+, Sea Salt Gray; picture frame in Prime+ Sea Salt Gray. Grooved boards, 3/16" gaps, matching fascia. Not rated for fire zones; 25-yr product / 25-yr fade & stain.
Railing	TimberTech Cinch Rail, Satin Black, 36". 29 LF.
Frame	8 2x8 #1 True Frame Joist SYP GC @ 16" OC x 9'-2 1/2"; 2-ply 2x8 front and sides; DROP 4x10 DF: 9'-8", 2 posts at 1'-6" / 8'-4 3/16" (worst 1,987 lb).
Foundation	DP-50/50.
Design load	30 psf snow, stamped by a Colorado engineer.
Hardware	Simpson ZMAX galvanized connectors. Camo EdgeClip fasteners.

PLAN

9'-9" x 9'-7" outside to outside · 96 SF · 10'-0" above grade · 29 LF rail

SCHEDULE

1. Engineering & ordering (2-3 weeks). Stamped drawings, materials ordered, samples approved.
2. Day 1 — protection, utilities located (811).
3. Day 2 — layout, 2 Diamond Piers driven, ledger set.
4. Days 3-4 — posts and beams set.
5. Days 5-6 — frame, flashing at every wall.
6. Days 7-8 — decking, borders first.
7. Days 9-9 — Cinch rail.
8. Day 10 — final clean; end of construction.

NEXT STEP

Engineering first. This is a quote: the numbers depend on the stamped engineering, so the first step is engineering. GSX provides the Colorado engineer and supplies the design package; you pay GSX the engineer's cost at no markup and you own the stamped set. When the stamped set is in hand, GSX issues a fixed-price proposal on these numbers with the payment terms.

Quote, not a contract: a fixed-price proposal follows the stamped engineering. Quote numbers hold 30 days. Renders and plan are design intent; the stamped engineering set governs structure, dimensions and locations.

RENDERS 3D model · design intent · timbers shown as specified



From the yard



From the front corner



Standing on the deck




Under the deck — posts, beams, footings

ISOMETRICS



Isometric from the stair corner

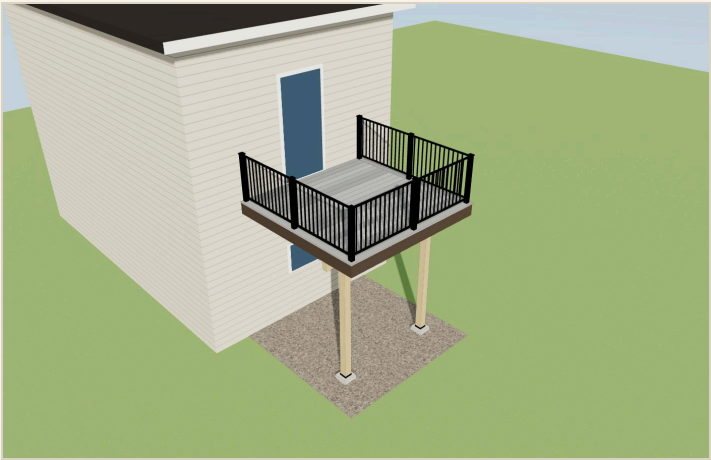


Isometric from the open corner



Low isometric




Isometric from under the frame

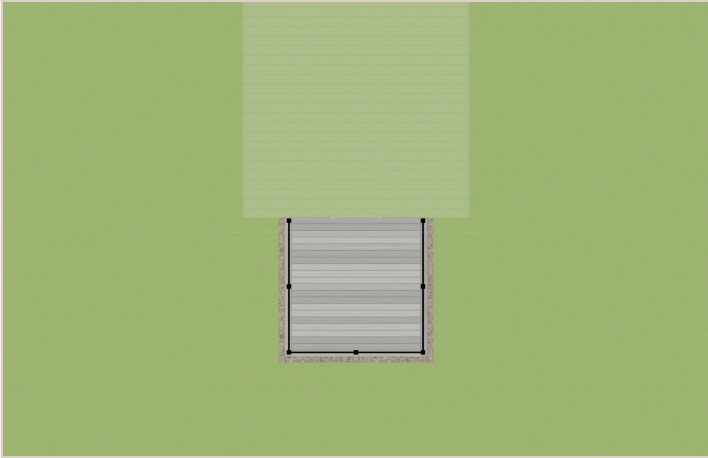


Plan from above


EXPLODED

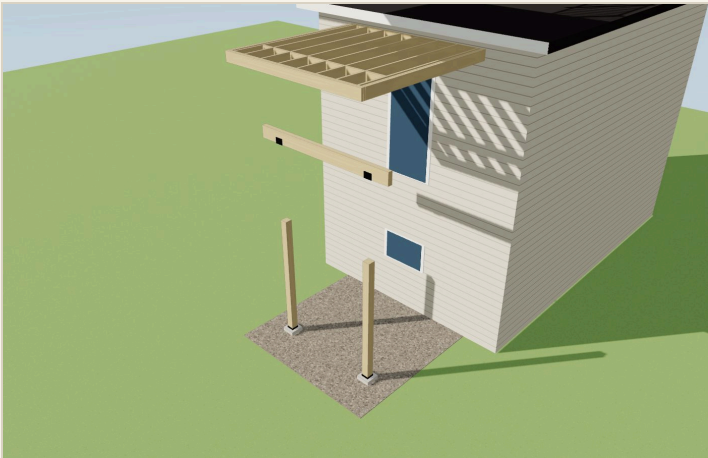

Exploded — every layer

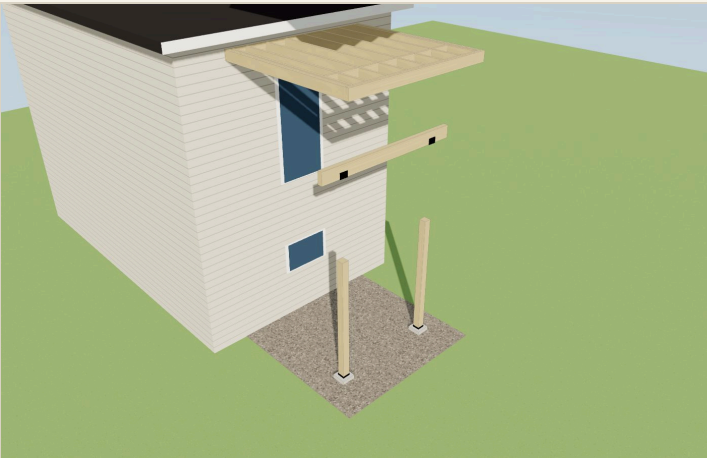

Exploded — from the open corner

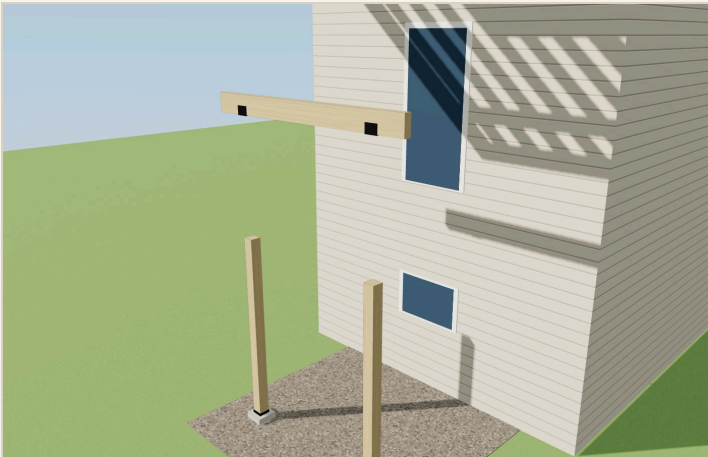

Exploded — from the front corner



Exploded — low angle

G-001 General notes · design criteria

G-001 GENERAL NOTES · DESIGN CRITERIA

Loads, codes, structure summary, sheet index, site — the permit-set cover

10 x 10 Deck — TimberTech Prime+ Sea Salt Gray

GSX · Jade Pender 303-550-9558 · September 21, 2026 · Rev 0 FOR REVIEW

PROJECT	
10 x 10 Deck — TimberTech Prime+ Sea Salt Gray	
CO	
96 SF · 10'-0" above grade · 1 zone	
DESIGN CRITERIA	
Deck live load	40 psf uniform (IRC Table R301.5); guards 200 lb concentrated / 50 plf
Ground snow	30 psf (ground; deck design uses the larger of snow and live) — 40 psf live governs
Dead load	10 psf deck
Roof snow (cover)	—
Design total	50 psf on the deck
Wind	115 mph Vult, Exposure C, Risk Cat. II (ASCE 7-16) — confirm special wind region
Frost depth	3'-0" (footings bear below)
Soil bearing	1,500 psf presumptive (IRC R401.4.1) — no soils report
Seismic	B
Wildfire (WUI)	not in a WUI zone
Codes	2021 IRC as adopted by the jurisdiction; IRC R507 decks; ASCE 7-16 loads; Tables R507.5 / R507.6 / R507.4 / R507.9
Engineering	Stamped structural set by a Colorado PE required — the stamped set governs
STRUCTURE	
Footings	DP-50/50
Posts	2 x 6x6
Beams	DROP 4x10 DF: 9'-8", 2 posts at 1'-6" / 8'-4 3/16" (worst 1,987 lb)
Joists	8 2x8 #1 True Frame Joist SYP GC @ 16" OC x 9'-2 1/2"
Rims	2-ply 2x8 front and sides
Ledger	2x8 ledger x 9'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 11 fasteners
Decking	TimberTech Prime+ Sea Salt Gray — 20 rows parallel to the house, picture frame in Prime+ Sea Salt Gray, 3/16" gaps, Camo EdgeClip
Rail	Cinch 36" Satin Black: 6 bays, 7 posts, 29 LF


SHEET INDEX	
G-001	General notes · design criteria
A-001	Isometric · renders
S-100	Foundation plan
S-101	Framing plan
A-101	Decking plan
A-201	Railing plan + elevation
A-301	Section + front elevation
D-501	Details
T-400	Build steps (build set)
T-700	Order + schedules (takeoff)

SITE	
Setbacks not on file — verify the plat / ILC before layout	

FLAGS (INTERNAL — remove before the permit submittal)	
STOP	DROP 4x10 DF post spacing 6'-10 3/16" exceeds allowable 6'-3...
ENGINEER	cantilever 2'-1 3/4" > L/4 of the 7'-3 3/4" back-span — owner...
CODE	posts over 8' (8'-2 1/16") — add diagonal knee bracing at each...

No scale

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

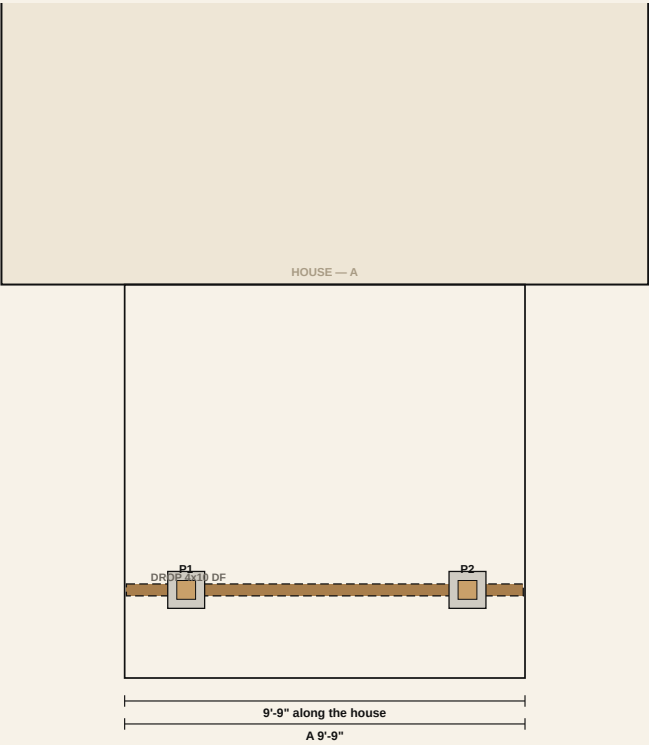


FOOTING SCHEDULE

Diamond Pier DP-50/50 (head + 4 x 50" pins),
3,300 lb allowable

ID	X	Y	ZONE	LOAD
P1	1'-6"	7'-5 1/4"	A	1,987 lb
P2	8'-4 3/16"	7'-5 1/4"	A	1,987 lb

x from the left frame face facing the house; y from the reference wall.
Frost 3'-0" · soil 1,500 psf · worst post 1,987 lb

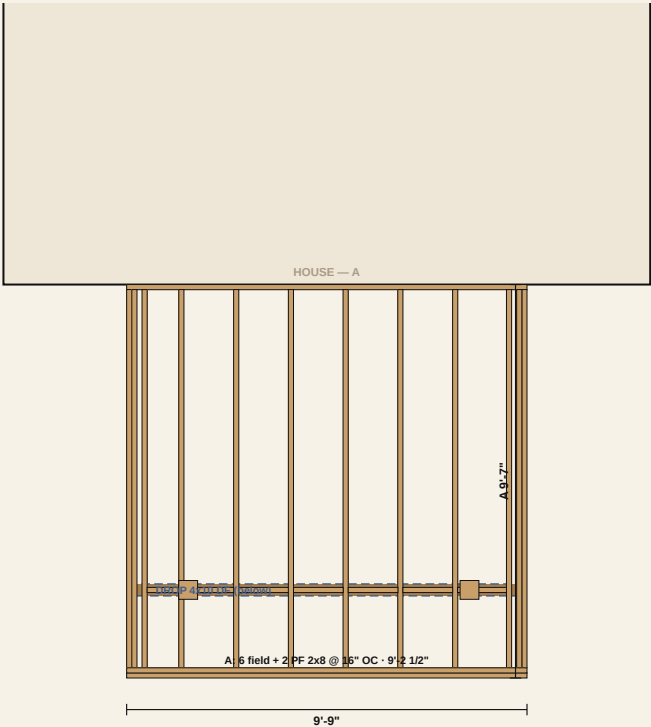

FRAMING NOTES

- 8 2x8 #1 True Frame Joist SYP GC @ 16"
- OC x 9'-2 1/2"
- 2-ply 2x8 front and sides
- 2x8 ledger x 9'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 11
- blocking one row over the beam, staggered
- G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)
- DROP 4x10 DF: 9'-8", 2 posts at 1'-6" / 8'-4 3/16" (worst 1,987 lb)
- Connectors:
- Simpson LUS28Z face-mount hanger 2x8/2x10: 16
- Simpson HUCQ28-2-SDS concealed-flange double 2x8 hanger: 4
- Simpson DTT12Z lateral tie kit w/ SDS screws: 4
- Simpson H2.5AZ hurricane tie (joists to the drop beam, hidden): 10
- Simpson BC46Z post cap 6x post / 4x beam: 2
- 7/16" x 4-1/2" HDG hex bolt + nut + 2 washers: 14

A-101 Decking plan


A-101

DECKING PLAN

Every board, border and divider as it lays; rail posts shown for the pockets

10 x 10 Deck — TimberTech Prime+ Sea Salt Gray

GSX · Jade Pender 303-550-9558 · September 21, 2026 · Rev 0 FOR REVIEW

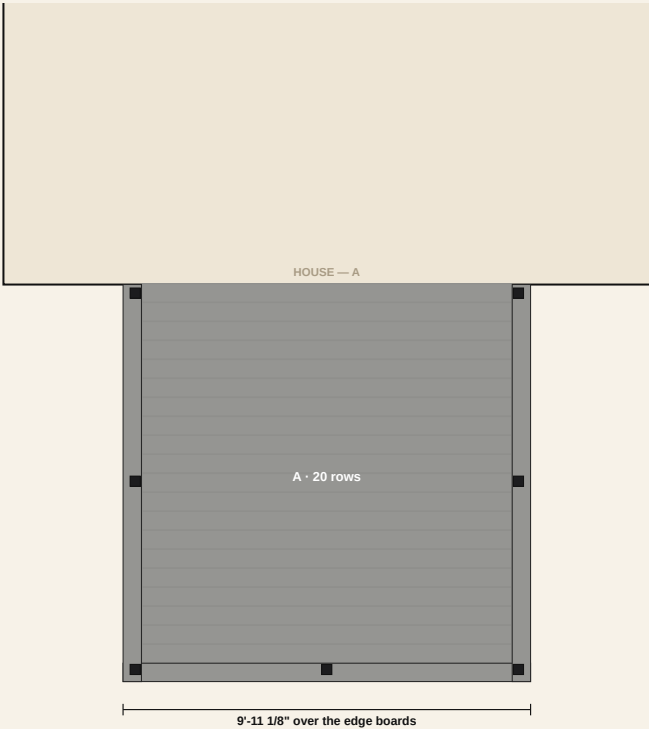

DECKING

Field: TimberTech Prime+ Sea Salt Gray,
5.36" x 0.94", 3/16" gaps
Border: Prime+ Sea Salt Gray
Boards run parallel to the house; edge
overhang 1 1/16" over the fascia
100% hidden — Camo EdgeClip 3/16" at
every joist in every gap (9 bearing
points x 20 gaps = 180); board ends
clipped on the PF joists, never screwed
Cap-Tor xd color-matched ONLY at: first
row 1 per joist on the house edge ·
borders 2 per bearing point @ 16" ·
fascia 2 at each board end then
Rows per zone: A 20 (no rips)

A-201 Railing plan + elevation


A-201

RAILING PLAN + ELEVATION

Post IDs and types (E end · L line · C corner), bay lengths, outer-edge elevation

10 x 10 Deck — TimberTech Prime+ Sea Salt Gray

GSX · Jade Pender 303-550-9558 · September 21, 2026 · Rev 0 FOR REVIEW

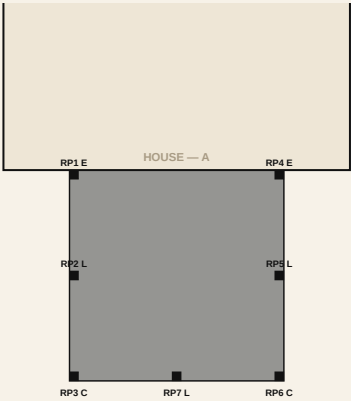

RAILING

Cinch 36" Satin Black: 6 bays, 7 posts, 29 LF

Cinch 36" — 7 posts (2 CORNER, 2 END, 3 LINE) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post

Bays: left 4'-7" · left 4'-7" · right 4'-7" · right 4'-7" · front 4'-8" · front 4'-8"

Guard 36" min above the deck; openings under 4" (IRC R312). Rail LF for labor = deck-edge LF of actual rail.



Plan above · elevation of the outer edge below

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

A-301 Section + front elevation

A-301


SECTION + FRONT ELEVATION

Cut through the deepest zone; heights to grade, frost line, cantilever, guard

10 x 10 Deck — TimberTech Prime+ Sea Salt Gray

GSX · Jade Pender 303-550-9558 · September 21, 2026 · Rev 0 FOR REVIEW


SECTION through zone A at 4'-10 1/2" — looking toward the left end

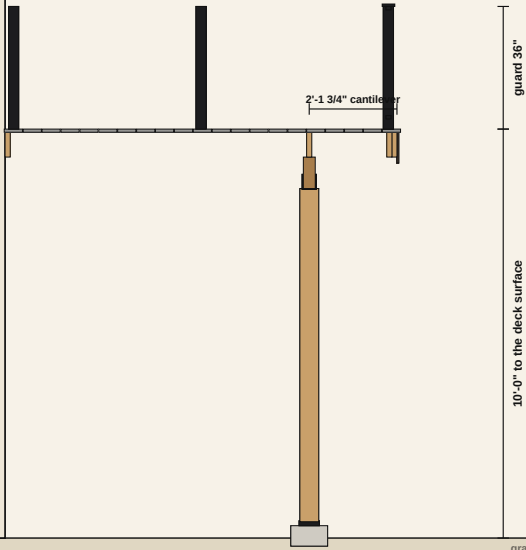

grade

frost 3'-0"

FRONT ELEVATION — from the yard

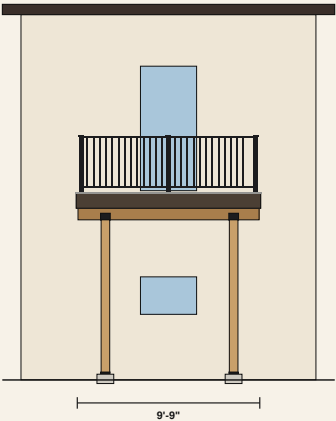

SECTION NOTES

Deck surface 10'-0" above grade; guard 36" where the drop exceeds 30"
DROP 4x10 DF: 9'-8", 2 posts at 1'-6" / 8'-4 3/16" (worst 1,987 lb)
Posts 2 x 6x6 on DP-50/50
2x8 ledger x 9'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 11 fasteners
G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)

Section left · elevation right · not to a common scale

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

D-501 Details


D-501 DETAILS

Ledger · post · beam · cap · footing · rail post · deck edge · the job's special condition

10 x 10 Deck — TimberTech Prime+ Sea Salt Gray


GSX · Jade Pender 303-550-9558 · September 21, 2026 · Rev 0 FOR REVIEW

1 LEDGER AT THE HOUSE




2x8 ledger x 9'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 11 fasteners

2 POST · BEAM · CAP




DROP 4x10 DF: 9'-6", 2 posts at 1'-6" / 8'-4 3/16" (worst 1,987 lb)

3 FOOTING · POST BASE

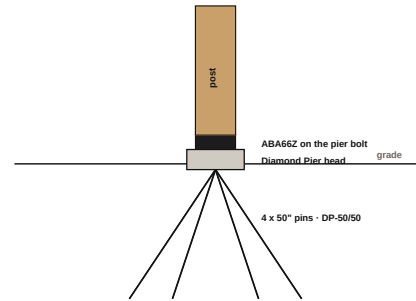


4 RAIL POST · GUARD

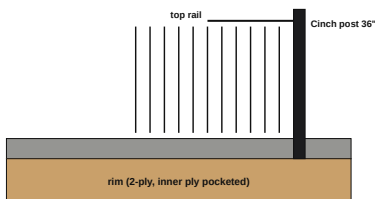

Cinch 36" — 7 posts (2 CORNER, 2 END, 3 LINE) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post

5 DECK EDGE · BORDER



100% hidden — Camo EdgeClip 3/16" at every joist in every gap (9 bearing points x 20 gaps = 180); board ends clipped on the PF joists, never screwed


6 BLOCKING

Blocking one row over the beam, staggered up and down so every block can be end-nailed.

Schematic details, not to scale

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

BUILD SET T-400 series · goes in · how · check

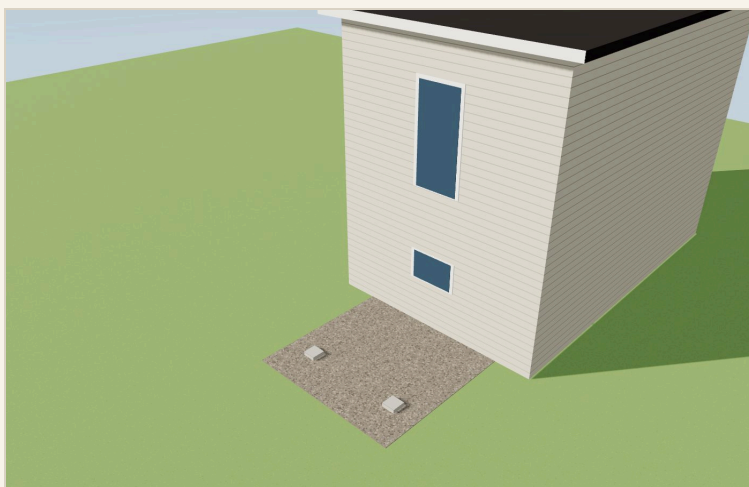

Step 1 · Footings — 2 Diamond Pier DP-50/50 driven-pin footings

T-400 · Step 1 · Footings

GOES IN


- (2) Diamond Pier DP-50/50 (head + 4 x 50" pins, plugs, caps)
- (2) Simpson ABA66Z adjustable post base 6x6 on the pier bolt

HOW

- Call 811 and locate before any hole or pin.
- Pull the beam lines from the house wall:
DROP 4x10 DF at 7'-5 1/4" from the reference wall, posts at 1'-6" / 8'-4 3/16".
- Set 2 Diamond Pier heads level at grade on undisturbed soil and drive the 4 pins in each; caps on.

CHECK

- Footings on the layout within 1/2"; bearing on undisturbed soil
- Pins fully driven, heads level
- Photos before backfill

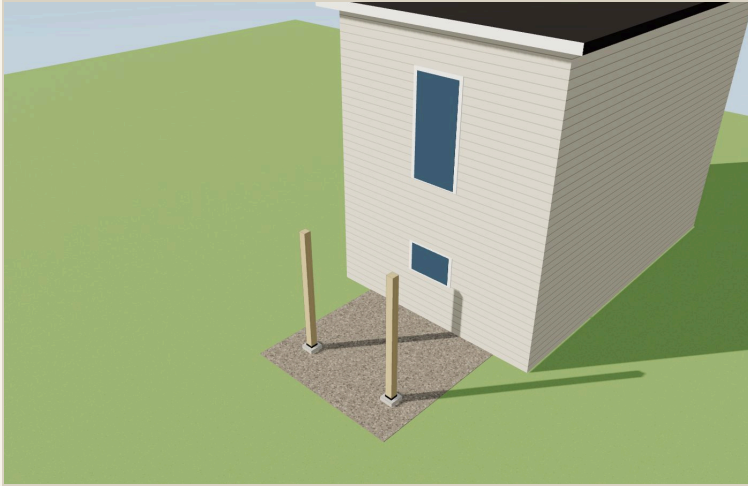

Step 2 · Posts — 6x6 #2 GC on ZMAX bases

T-401 · Step 2 · Posts

GOES IN


- (2) 6x6x10 #2 GC
- (2) Simpson ABA66Z adjustable post base 6x6 on the pier bolt

HOW

- 6x6 posts on the bases; cut so the beam top lands at the joist bottom (drop beam) or the joist top (flush beam): DROP 4x10 DF posts 8'-2 1/16" — field-measure each.
- Plumb both ways, brace, then the caps go on with the beams.

CHECK

- Posts plumb to a string; tops on the beam line
- No post in ground contact without a standoff

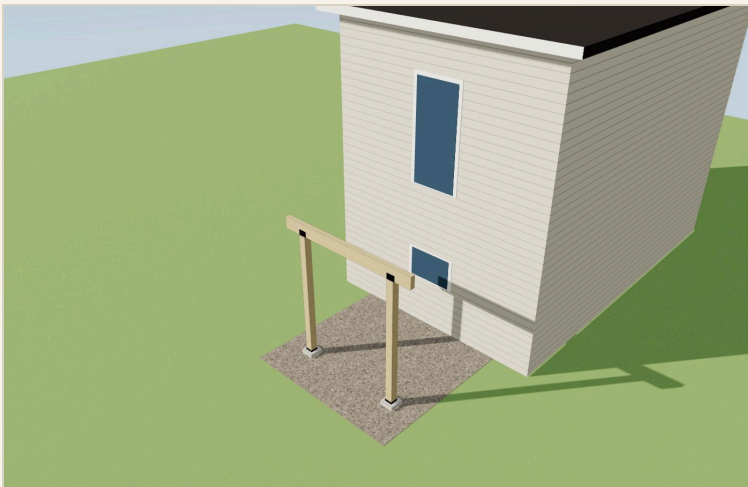

Step 4 · Beams — DROP 4x10 DF (2 posts)

T-403 · Step 4 · Beams

GOES IN

- (1) 4x10x10 Douglas Fir #2
- (2) 6x6x10 #2 GC
- (2) Simpson BC46Z post cap 6x post / 4x beam

HOW

- DROP 4x10 DF: 9'-8" one piece, 2 posts @ 6'-10 3/16" max
- Crown up, strung straight, caps screwed off with the SDS screws in the box.

CHECK

- Beam top = joist bottom (drop) / joist top (flush)
- Splices land on a post; caps fully fastened

T-404 · Step 5 · Frame

GOES IN

- (15) 2x8x10 #1 True Frame Joist SYP GC
- (1) 2x8x12 #1 True Frame Joist SYP GC
- (16) Simpson LUS28Z face-mount hanger 2x8/2x10
- (4) Simpson HUCQ28-2-SDS concealed-flange double 2x8 hanger
- (1) Camo 9ga HDG hanger nail 3" 5 lb (~350)
- (1) Camo 9ga HDG hanger nail 1-1/2" 5 lb (~650)
- (1) FastenMaster LedgerLOK 3-5/8" 50 ct
- (10) Simpson H2.5AZ hurricane tie (joists to the drop beam, hidden)
- (1) Ledger flashing set: SA membrane 6"x75' + (2) 10' alum. Z + end dams
- (2) Nichigo G-Tape 3035 2" x 65' black

HOW

- 2x8 ledger x 9'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 11 fasteners
- A: 6 joists @ 16" OC x 9'-2 1/2". Crown up, hangers at the ledger.
- Blocking one row over the beam, staggered.
- G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)

CHECK

- Frame square: diagonals within 1/8"
- Every hanger fully nailed; ledger fasteners per the schedule
- Tape continuous; photos of the ledger, hangers and footings before decking



Step 5 · Frame — 2x8 joists at 16", rims, ledger, blocking over the beam

T-405 · Step 6 · Decking

GOES IN


- (20) TimberTech Prime+ Sea Salt Gray 1x6x12 Grooved
- (1) TimberTech Prime+ Sea Salt Gray 1x6x12 Square Edge — borders
- (1) TimberTech Prime+ Sea Salt Gray 1x6x20 Square Edge — borders
- (3) Deck skirt — HardieTrim 4/4 x 12 x 12' smooth ColorPlus (color TBD) (wraps the double rim, in place of the composite fascia)
- (1) Color-matched trim screws for HardieTrim, 100 ct ((color TBD))
- (1) ColorPlus touch-up kit, (color TBD)
- (2) Camo EdgeClip 3/16" 410SS Black 90 ct

HOW

- 100% hidden — Camo EdgeClip 3/16" at every joist in every gap (9 bearing points x 20 gaps = 180); board ends clipped on the PF joists, never screwed
- Cap-Tor xd color-matched ONLY at: first row 1 per joist on the house edge · borders 2 per bearing point @ 16" · fascia 2 at each board end then alternate top/bottom every 12", pre-drilled
- Rows per zone: A 20. Borders and breakers first, then the field rows from the outer edge toward the house.

CHECK

- 3/16" gaps held
- No cut end shows at the outer edge
- Color: every board from the same run

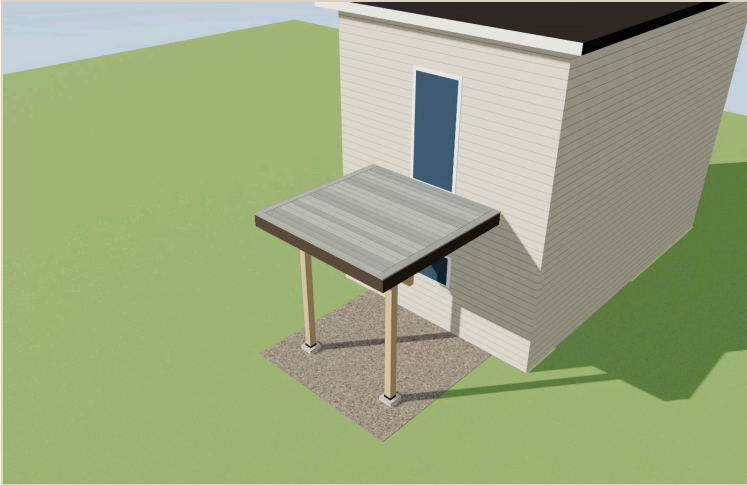

Step 6 · Decking — TimberTech Prime+ Sea Salt Gray, Sea Salt Gray border, hidden fasteners

T-406 · Step 7 · Rail

GOES IN

- (6) Cinch HD Rail 6' x 36" level panel Satin Black
- (2) Cinch 3" CORNER post 36" Satin Black w/ brackets, cap, skirt
- (2) Cinch 3" END post 36" Satin Black w/ brackets, cap, skirt
- (3) Cinch 3" LINE post 36" Satin Black w/ brackets, cap, skirt
- (1) Rust-Oleum flat black touch-up (cut ends)

HOW

- Cinch 36" — 7 posts (2 CORNER, 2 END, 3 LINE) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post

CHECK

- Top of rail 36" above the decking; posts plumb
- Cables tensioned / balusters under 4" clear
- End of construction



Step 7 · Rail — Cinch 36" Satin Black

3D MODEL



The interactive 3D model lives at the online version of this document.

Prices: rate card · GC at cost · 42.5% GM · financed ÷ 0.93 unless the job says otherwise. Internal — not for the homeowner.