

16 x 14 Deck · Prime+ Sea Salt Gray · Fulton

16' x 14' · 2'-4" high · ledger to the house · 2x10 SYP @ 16" · 4x10 DF beam on 4 Diamond Piers · Prime+ Sea Salt Gray, single picture frame · Fulton black · 5' stair to the existing pad

CHECK OR ACH	FINANCED	MONTHLY	SQUARE FEET	FOOTINGS	RAIL
\$27,289	\$29,343	\$341	220	4	38 LF

DESIGN READS

Frame	15'-9" x 13'-9" outside to outside
Deck	15'-11 1/8" x 13'-10 1/16" over fascia · 220 SF · 2'-4" above grade
Joists	13 2x10 #1 True Frame Joist SYP GC @ 16" OC x 13'-4 1/2"
Rims	2-ply 2x10 front and sides
Beam	DROP 4x10 DF: 15'-8", 4 posts at 1'-0 1/2" / 5'-7 3/16" / 10'-1 13/16" / 14'-8 1/2" (worst 1,796 lb)
Posts	4 x 6x6 on DP-50/50
Load	50 psf (40 psf live governs)
Decking	TimberTech Prime+ Sea Salt Gray — 29 rows parallel to the house, picture frame in Prime+ Sea Salt Gray, 3/16" gaps, Camo EdgeClip
Rail	Fulton 36" Black: 6 bays, 8 posts, 38 LF
Stair	front: 4 risers @ 7.00", 3 treads, 6 stringers, 5'-0" wide

- nominal 16'-0" x 14'-0" -> frame 15'-9" x 13'-9": field boards cut to 15'-0", 29 full rows, deck over fascia 15'-11 1/8" x 13'-10 1/16"
- Prime+ is scalloped — Cortex not approved; field is 100% hidden on Camo EdgeClips, board ends clipped on the PF joists

SITE & CODE FLAGS internal

CODE	STAIRS	front stair: 4 risers — graspable handrail 34-38" on at least one side (IRC R311.7.8) IRC R311.7
------	--------	--

CHECK	SETBACK	rear setback not entered — confirm the required rear setback and the deck-to-line distance before the frame is laid out zoning
CHECK	SETBACK	side setback not entered — confirm the required side setback and the deck-to-line distance before the frame is laid out zoning
CHECK	FOOTING	Diamond Pier: pins 50" — locate utilities (811) before driving; bearing 1,796 lb/post vs 3,300 lb allowable (manufacturer chart, confirm)
CHECK	LEDGER	verify the rim board behind the ledger is solid 2x/LVL/engineered rim (not I-joist web or a hollow band) before the ledger fasteners go in IRC R507.9.1.1
INFO	LEDGER	lateral: 4 x DTT1Z (750 lb each) into house floor framing IRC R507.9.2
INFO	WIND	basic wind speed 115 mph — standard connectors
INFO	FIRE	Prime+: Not rated for fire zones — fine outside a WUI zone
INFO	STAIRS	front stair: 4 risers @ 7.00" · 3 treads @ 11.38" · run 2'-10 1/8" · stringers 6 @ 12" OC (composite treads) IRC R311.7.5 / TimberTech
INFO	SETBACK	no address on the spec — tax rate and jurisdiction defaults used

THE ORDER Decks & Docks · GSEXT1 · ship to the job

Lumber

NET	ORDER	UNIT	ITEM	WHY
2	3	ea	2x10x12 #1 True Frame Joist SYP GC	+1 cull (2 blocking)
17	18	ea	2x10x14 #1 True Frame Joist SYP GC	+1 cull (11 field joist · 2 PF joist · 2 left rim ply · 2 right rim ply)
3	4	ea	2x10x16 #1 True Frame Joist SYP GC	+1 cull (2 front rim ply · ledger)
3	4	ea	2x12x12 #1 True Frame Joist SYP GC	+1 cull (3 stair stringer)
1	2	ea	2x6x12 #1 True Frame Joist SYP GC	+1 cull (stair kicker/hanger board)
1	1	ea	4x10x16 Douglas Fir #2	exact (drop beam: DROP 4x10 DF)
1	1	ea	6x6x8 #2 GC	exact (yields 4 posts at ~6")

Footings

NET	ORDER	UNIT	ITEM	WHY
4	4	ea	Diamond Pier DP-50/50 (head + 4 x 50" pins, plugs, caps)	exact — confirm stock
4	4	ea	Simpson ABA66Z adjustable post base 6x6 on the pier bolt	exact

Hardware

NET	ORDER	UNIT	ITEM	WHY
26	26	ea	Simpson LUS28Z face-mount hanger 2x8/2x10	exact (13 joists x 2 ends)
4	4	ea	Simpson HUCQ210-2-SDS concealed-flange double 2x10 hanger (SDS screws included)	exact (2 side rims x 2 ends) — confirm stock
1	1	box	Camo 9ga HDG hanger nail 3" 5 lb (~350)	156 needed of ~350
1	1	box	Camo 9ga HDG hanger nail 1-1/2" 5 lb (~650)	254 needed of ~650
1	1	box	FastenMaster LedgerLOK 3-5/8" 50 ct	17 needed
4	4	ea	Simpson DTT1Z lateral tie kit w/ SDS screws	exact (2 near each end of every ledger, into house floor framing)
15	15	ea	Simpson H2.5AZ hurricane tie (joists to the drop beam, hidden)	exact (13 joists + 2 rims at each drop beam)
4	4	ea	Simpson BC46Z post cap 6x post / 4x beam	exact
1	1	box	Simpson SD10212R100 #10 x 2-1/2" connector screw 100 ct	88 needed (bases 48 · caps 40)
2	2	box	GRK RSS #10 x 3-1/8" structural screw 100 ct	142 needed (laminations 94 · blocking 48)
24	26	ea	7/16" x 4-1/2" HDG hex bolt + nut + 2 washers	+2 (12 rail posts x 2)
6	6	ea	Simpson LSCZ adjustable stair-stringer connector	exact (front stair, 1 per stringer at the rim)

Flashing & waterproofing

NET	ORDER	UNIT	ITEM	WHY
1	1	set	Ledger flashing set: SA membrane 6"x75' + (2) 10' alum. Z + end dams	exact
4	4	roll	Nichigo G-Tape 3035 2" x 65' black	204' needed of 260'
1	1	roll	Nichigo G-Tape 3035 4" x 65' black	58' needed of 65'

Decking

NET	ORDER	UNIT	ITEM	WHY
29	31	ea	TimberTech Prime+ Sea Salt Gray 1x6x16 Grooved	+2 (A: 29 rows @ 15'-0")
2	2	ea	TimberTech Prime+ Sea Salt Gray 1x6x16 Square Edge — borders	exact (left border 13'-10 1/16" · right border 13'-10 1/16")
1	2	ea	TimberTech Prime+ Sea Salt Gray 1x6x20 Square Edge — borders	+1 (front border 15'-11 1/8")

Fasteners

NET	ORDER	UNIT	ITEM	WHY
5	5	box	Camo EdgeClip 3/16" 410SS Black 90 ct	377 clips needed · 450 supplied
1	1	box	Starborn Cap-Tor xd 2-3/4" Epoxy Sea Salt Gray 350 ct	273 screws needed (first row 13 · border 78 · fascia 62 · stairs 120)

Fascia

NET	ORDER	UNIT	ITEM	WHY
4	5	ea	TimberTech Prime+ Fascia Sea Salt Gray 0.58x11.95x12	+1 (left fascia 12'-0" · left fascia 1'-9 9/16" · right fascia 12'-0" · right fascia 1'-9 9/16" · front fascia 12'-0" · front fascia 3'-10 3/16")

Rail

NET	ORDER	UNIT	ITEM	WHY
2	2	ea	TimberTech Fulton Rail 6' x 36" level panel Black	exact (cut to 4'-9")
4	4	ea	TimberTech Fulton Rail 8' x 36" level panel Black (pre-assembled steel balusters, cut to bay)	exact (cut to 6'-5 1/2")
2	2	ea	TimberTech Fulton 2" CORNER post 36" Black w/ brackets, cap, skirt	exact
4	4	ea	TimberTech Fulton 2" END post 36" Black w/ brackets, cap, skirt	exact
2	2	ea	TimberTech Fulton 2" LINE post 36" Black w/ brackets, cap, skirt	exact
1	1	ea	Rust-Oleum flat black touch-up (cut ends)	exact

Stairs

NET	ORDER	UNIT	ITEM	WHY
3	4	ea	TimberTech Prime+ Sea Salt Gray 1x6x12 Square Edge — treads (front stair)	+1 (3 treads x 2 boards @ 5'-0", 2 per board)
2	2	ea	TimberTech Prime+ Sea Salt Gray riser board 7-1/4" x 12' (front stair)	exact (4 risers @ 5'-0")
2	2	ea	TimberTech Fulton Rail 6' x 36" STAIR panel Black (front stair)	exact
4	4	ea	TimberTech Fulton 2" STAIR post Black w/ brackets, cap (front stair)	exact (top + bottom of each rail side)
1	1	ea	Fulton graspable handrail kit (front stair)	exact (4+ risers — IRC R311.7.8)

Site

NET	ORDER	UNIT	ITEM	WHY
224	224	SF	Demo existing deck + haul-off	labor line — field verify the existing deck

FASTENER & CONNECTOR SCHEDULE

Ledger	2x10 ledger x 15'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 17 fasteners
Joist tape	G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)
Field	100% hidden — Camo EdgeClip 3/16" at every joist in every gap (13 bearing points x 29 gaps = 377); board ends clipped on the PF joists, never screwed
Face screws	Cap-Tor xd color-matched ONLY at: first row 1 per joist on the house edge · borders 2 per bearing point @ 16" · fascia 2 at each board end then

alternate top/bottom every 12", pre-drilled · stair treads 2 per stringer per board

Rail Fulton 36" — 8 posts (2 CORNER, 4 END, 2 LINE) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post

▼ Cut list

MEMBER	STOCK	LENGTH	QTY	NOTE
Field joists	2x10	13'-4 1/2"	11	@ 16" OC, crown up
Picture-frame joists	2x10	13'-4 1/2"	2	centre 5 1/4" from each frame face
Side rim plies	2x10	13'-4 1/2"	4	2-ply, laminated on the ground with RSS 2 rows @ 12" staggered
Front rim plies	2x10	15'-9"	2	inner ply takes the hangers; outer ply laminated after
Ledger	2x10	15'-9"	1	top at deck height less board thickness; membrane behind, flashing over
Blocking	2x10	1'-2 1/2"	12	1 row at 11'-7 1/4" from the wall
Field boards run A	Prime+ Sea Salt Gray	15'-0"	29	boards run parallel to the house
Stair stringers (front)	2x12	4'-8 1/8"	6	4 risers @ 7.000" · 3 treads @ 11.38" · stringers 12" OC
DROP 4x10 DF beam	4x10	15'-8"	1	y 11'-7 1/4"; posts at 1'-0 1/2" / 5'-7 3/16" / 10'-1 13/16" / 14'-8 1/2"
Posts under DROP 4x10 DF	6x6	6"	4	field-measure each
Left border	Prime+ Sea Salt Gray square	13'-10 1/16"	1	mitre at the corners; dividers on the doubled joist
Right border	Prime+ Sea Salt Gray square	13'-10 1/16"	1	mitre at the corners; dividers on the doubled joist
Front border	Prime+ Sea Salt Gray square	15'-11 1/8"	1	mitre at the corners; dividers on the doubled joist
Stair treads (front)	Prime+ Sea Salt Gray square	5'-0"	6	2 boards per tread, nosing 3/4" over the riser
Stair risers (front)	riser board	5'-0"	4	rip to 7.00" less tread thickness
Left fascia	fascia	12'-0"	1	flush under the board nose; full board at the front corners, short piece at the house
Left fascia	fascia	1'-9 9/16"	1	flush under the board nose; full board at the front corners, short piece at the house
Right fascia	fascia	12'-0"	1	flush under the board nose; full board at the front corners, short piece at the house
Right fascia	fascia	1'-9 9/16"	1	flush under the board nose; full board at the front corners, short piece at the house
Front fascia	fascia	12'-0"	1	flush under the board nose; full board at the front corners, short piece at the house
Front fascia	fascia	3'-10 3/16"	1	flush under the board nose; full board at the front corners, short piece at the house

THE STACK internal

Materials (raw)	\$7,706.43
Materials × 1.15	\$8,862.39
Sales tax 4.00% on factored materials	\$354.50
Labor (rate card)	\$5,968.00
Work — carries the margin	\$15,184.89
General conditions at cost	\$880.00
Cost	\$16,064.89
Sell — check or ACH at 42.5% GM	\$27,289 · \$124.04/SF
Sell at the 40% floor	\$26,188
Financed	\$29,343 · \$341/mo at 6.99% × 10 yr
Gross profit	\$11,224

Labor

LINE	QTY	UNIT	RATE	EXT
Demolition — existing deck	224	SF	\$2.00	\$448.00
Diamond Pier install (replaces caisson)	4	pier	\$50.00	\$200.00
Frame	220	SF	\$10.00	\$2,200.00
Decking & fascia	220	SF	\$8.00	\$1,760.00
Railing	38	LF	\$20.00	\$760.00
Stairs (front)	4	riser	\$150.00	\$600.00

General conditions — at cost, no margin

ITEM	AMOUNT	WHY
General conditions	\$880	\$4/SF x 220 SF

What the price includes — sell values

ITEM	VALUE
Demolition & haul-off	\$779
Foundation & structure	\$10,395
Decking & fascia	\$7,959
Railing	\$4,284
Stairs	\$2,992
Site & project services	\$880
Total, check or ACH	\$27,289

ITEM	VALUE
Total, financed	\$29,343

THE QUOTE homeowner-facing · facts only

QUOTE

16 X 14 DECK — TIMBERTECH PRIME+ SEA SALT GRAY, FULTON RAIL

2x10 SYP frame at 16", 4x10 beam, 6x6 posts — on 4 Diamond Pier footings.
TimberTech Prime+ Sea Salt Gray decking, Fulton rail.

220 SF · 1 zone · 2'-4" above grade · 30 psf snow design

PRICE

Total investment \$29,343 — financed, no money down

- 12 months no payments, no down payment
- 18 months no payments, no down payment
- 6.99% for 10 years — about \$341/month

Check or ACH: \$27,289 (7% savings)

WHAT THE PRICE INCLUDES

ITEM	VALUE
Demolition & haul-off	\$779
Foundation & structure	\$10,395
Decking & fascia	\$7,959
Railing	\$4,284
Stairs	\$2,992
Site & project services	\$880
Total, check or ACH	\$27,289
Total, financed	\$29,343

INCLUDED — WHAT IT IS

ELEMENT	SELECTION
Decking	TimberTech Composite Prime+, Sea Salt Gray; picture frame in Prime+ Sea Salt Gray. Grooved boards, 3/16" gaps, matching fascia. Not rated for fire zones; 25-yr product / 25-yr fade & stain.
Railing	TimberTech Fulton Rail, Black, 36". 38 LF.
Frame	13 2x10 #1 True Frame Joist SYP GC @ 16" OC x 13'-4 1/2"; 2-ply 2x10 front and sides; DROP 4x10 DF: 15'-8", 4 posts at 1'-0 1/2" / 5'-7 3/16" / 10'-1 13/16" / 14'-8 1/2" (worst 1,796 lb).
Foundation	DP-50/50.
Design load	30 psf snow.
Hardware	Simpson ZMAX galvanized connectors. Camo EdgeClip fasteners.

PLAN

15'-9" x 13'-9" outside to outside · 220 SF · 2'-4" above grade · 38 LF rail

- Stair front: 4 risers @ 7.00", 3 treads, 6 stringers, 5'-0" wide

SCHEDULE

1. Day 1 — protection, utilities located (811), old deck out.
2. Day 2 — layout, 4 Diamond Piers driven, ledger set.
3. Days 3-4 — posts and beams set.
4. Days 5-6 — frame, flashing at every wall.
5. Days 7-8 — decking, borders first.
6. Days 9-9 — Fulton rail.
7. Day 10 — stairs.
8. Day 11 — final clean; end of construction.

NEXT STEP

This is a fixed-price proposal on the selections above. Check or ACH, or financed with approved credit. Numbers hold 30 days.


RENDERS 3D model · design intent · timbers shown as specified



From the yard



From the front corner

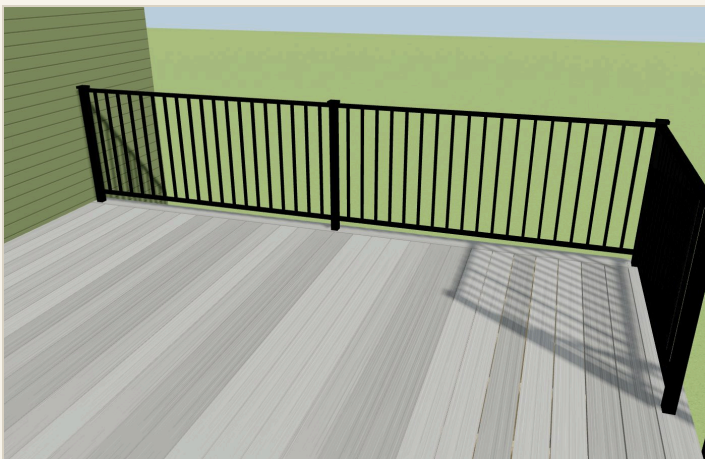

Standing on the deck



Under the deck — posts, beams, footings

ISOMETRICS




Isometric from the stair corner




Isometric from the open corner



Low isometric

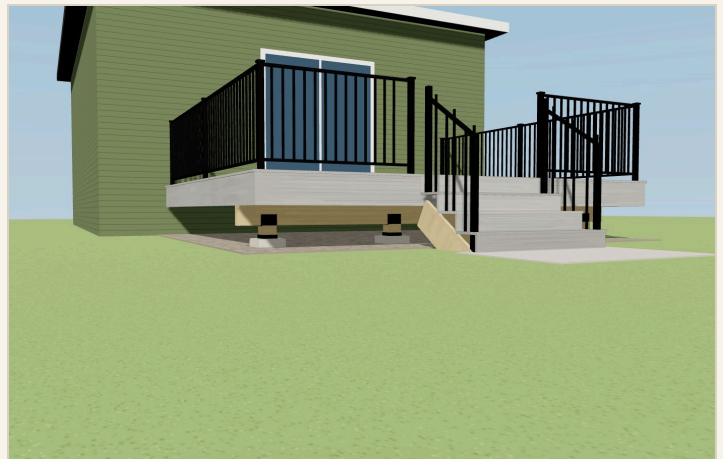

Isometric from under the frame

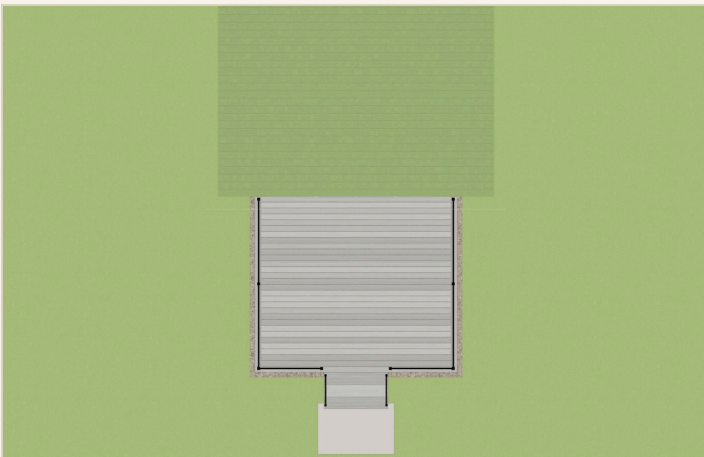

Plan from above


EXPLODED



Exploded — every layer



Exploded — from the open corner

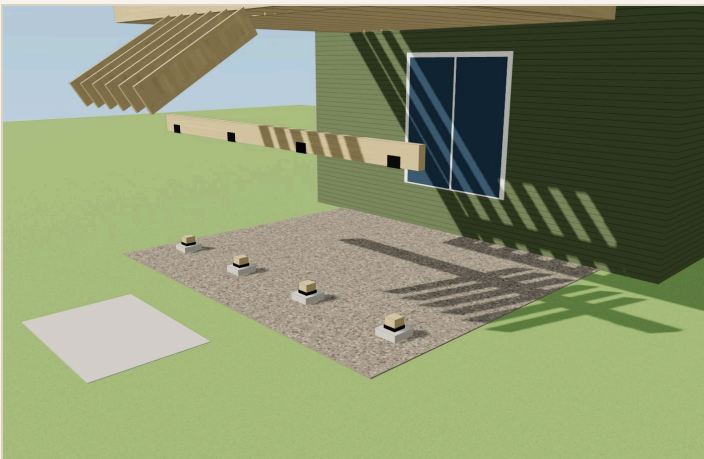

Exploded — from the front corner



Exploded — low angle

G-001 General notes · design criteria

G-001 GENERAL NOTES · DESIGN CRITERIA

Loads, codes, structure summary, sheet index, site — the permit-set cover

16 x 14 Deck — TimberTech Prime+ Sea Salt Gray, Fulton rail

GSX · Jade Pender 303-550-9558 · September 30, 2026 · Rev 0 FOR REVIEW

PROJECT

16 x 14 Deck — TimberTech Prime+ Sea Salt Gray, Fulton rail
CO
220 SF · 2'-4" above grade · 1 zone

DESIGN CRITERIA

Deck live load	40 psf uniform (IRC Table R301.5); guards 200 lb concentrated / 50 plf
Ground snow	30 psf (ground; deck design uses the larger of snow and live) — 40 psf live governs
Dead load	10 psf deck
Roof snow (cover)	—
Design total	50 psf on the deck
Wind	115 mph Vult, Exposure C, Risk Cat. II (ASCE 7-16) — confirm special wind region
Frost depth	3'-0" (footings bear below)
Soil bearing	1,500 psf presumptive (IRC R401.4.1) — no soils report
Seismic	B
Wildfire (WUI)	not in a WUI zone
Codes	2021 IRC as adopted by the jurisdiction; IRC R507 decks; ASCE 7-16 loads; Tables R507.5 / R507.6 / R507.4 / R507.9
Engineering	Prescriptive; no engineering required by this design

STRUCTURE

Footings	DP-50/50
Posts	4 x 6x6
Beams	DROP 4x10 DF: 15'-8", 4 posts at 1'-0 1/2" / 5'-7 3/16" / 10'-1 13/16" / 14'-8 1/2" (worst 1,796 lb)
Joists	13 2x10 #1 True Frame Joist SYP GC @ 16" OC x 13'-4 1/2"
Rims	2-ply 2x10 front and sides
Ledger	2x10 ledger x 15'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 17 fasteners
Decking	TimberTech Prime+ Sea Salt Gray — 29 rows parallel to the house, picture frame in Prime+ Sea Salt Gray, 3/16" gaps, Camo EdgeClip
Rail	Fulton 36" Black: 6 bays, 8 posts, 38 LF

SHEET INDEX

G-001	General notes · design criteria
A-001	Isometric · renders
S-100	Foundation plan
S-101	Framing plan
A-101	Decking plan
A-201	Railing plan + elevation
A-301	Section + front elevation
D-501	Details
T-400	Build steps (build set)
T-700	Order + schedules (takeoff)

SITE


Setbacks not on file — verify the plat / ILC before layout

FLAGS (INTERNAL — remove before the permit submittal)

CODE	front stair: 4 risers — graspable handrail 34–38" on at least one...
------	--

No scale

Design intent per 2021 IRC R507 prescriptive. Field verify. Do not scale.

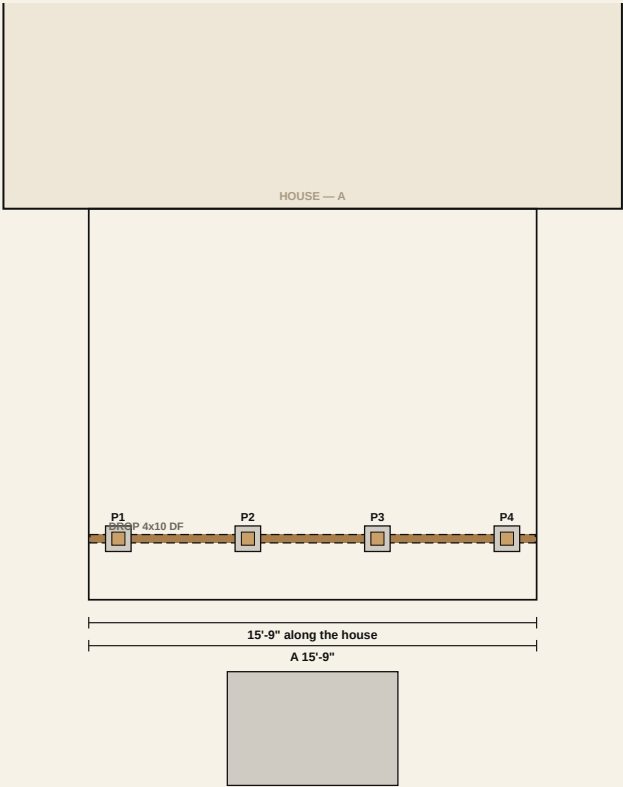


FOOTING SCHEDULE

Diamond Pier DP-50/50 (head + 4 x 50" pins),
3,300 lb allowable


ID	X	Y	ZONE	LOAD
P1	1'-0 1/2"	11'-7 1/4"	A	1,796 lb
P2	5'-7 3/16"	11'-7 1/4"	A	1,796 lb
P3	10'-1 13/16"	11'-7 1/4"	A	1,796 lb
P4	14'-8 1/2"	11'-7 1/4"	A	1,796 lb

x from the left frame face facing the house; y from the reference wall.
Frost 3'-0" · soil 1,500 psf · worst post 1,796 lb

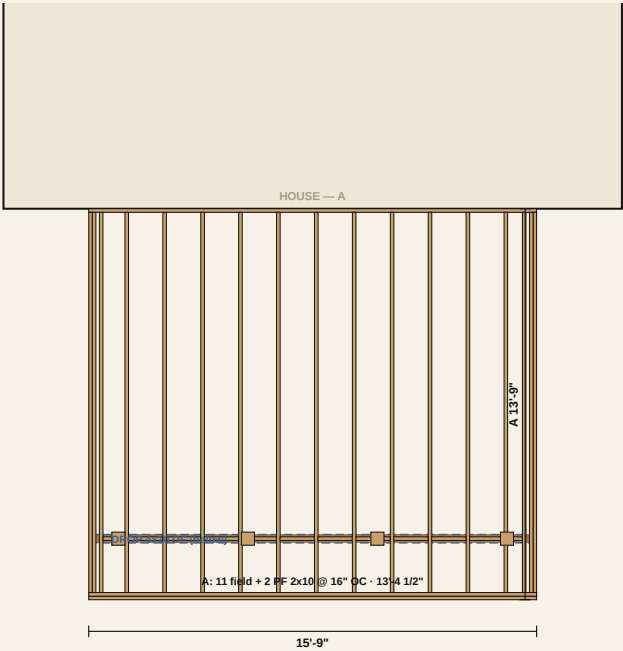

FRAMING NOTES

- 13 2x10 #1 True Frame Joist SYP GC @ 16"
- OC x 13'-4 1/2"
- 2-ply 2x10 front and sides
- 2x10 ledger x 15'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 17
- blocking one row over the beam, staggered
- G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)
- DROP 4x10 DF: 15'-8", 4 posts at 1'-0 1/2" / 5'-7 3/16" / 10'-1 13/16" / 14'-8 1/2" (worst 1,796 lb)
- Connectors:
- Simpson LUS28Z face-mount hanger 2x8/2x10: 26
- Simpson HUCQ210-2-SDS concealed-flange double 2x10 hanger (SDS screws included): 4
- Simpson DTT12Z lateral tie kit w/ SDS screws: 4
- Simpson H2.5AZ hurricane tie (joists to the drop beam, hidden): 15
- Simpson BC46Z post cap 6x post / 4x beam: 4
- 7/16" x 4-1/2" HDG hex bolt + nut + 2 washers: 24
- Simpson LSCZ adjustable stair-stringer connector: 6

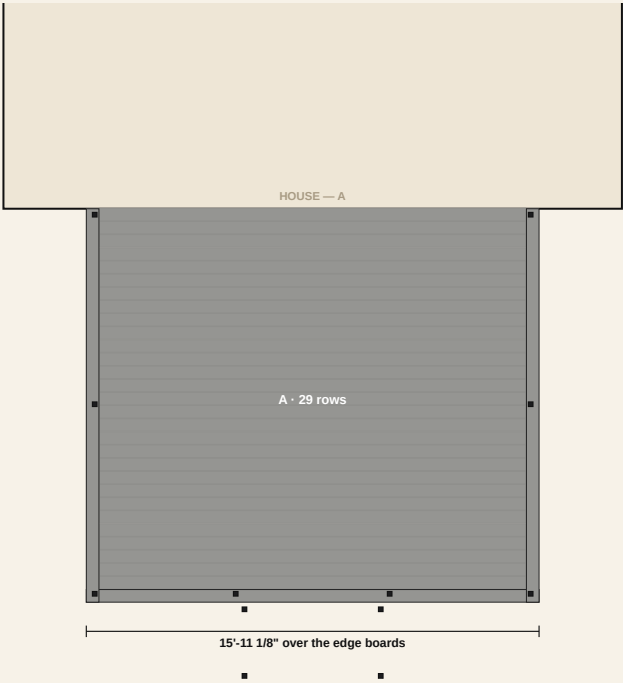

DECKING

Field: TimberTech Prime+ Sea Salt Gray,
5.36" x 0.94", 3/16" gaps
Border: Prime+ Sea Salt Gray
Boards run parallel to the house; edge
overhang 1 1/16" over the fascia
100% hidden — Camo EdgeClip 3/16" at
every joist in every gap (13 bearing
points x 29 gaps = 377); board ends
clipped on the PF joists, never screwed
Cap-Tor xd color-matched ONLY at: first
row 1 per joist on the house edge ·
borders 2 per bearing point @ 16" ·
fascia 2 at each board end then
Rows per zone: A 29 (no rips)

A-201 Railing plan + elevation


A-201

RAILING PLAN + ELEVATION

Post IDs and types (E end · L line · C corner), bay lengths, outer-edge elevation


16 x 14 Deck — TimberTech Prime+ Sea Salt Gray, Fulton rail

GSX · Jade Pender 303-550-9558 · September 30, 2026 · Rev 0 FOR REVIEW

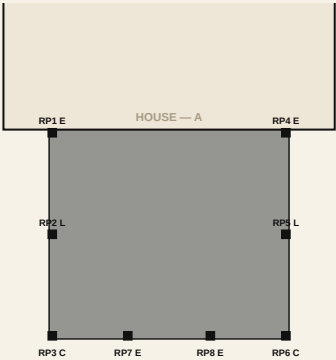

RAILING

Fulton 36" Black: 6 bays, 8 posts, 38 LF
Fulton 36" — 8 posts (2 CORNER, 4 END, 2 LINE) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post
Bays: left 6'-8" · left 6'-8" · right 6'-8" · right 6'-8" · front 4'-11 1/2" · front 4'-11 1/2"
Guard 36" min above the deck; openings under 4" (IRC R312). Rail LF for labor = deck-edge LF of actual rail.

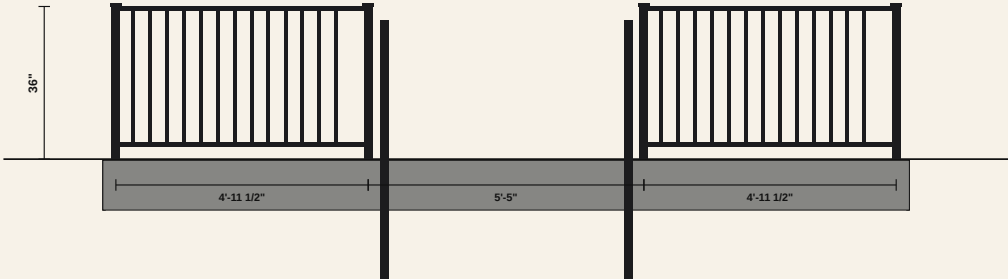

Plan above · elevation of the outer edge below

Design intent per 2021 IRC R507 prescriptive. Field verify. Do not scale.

A-301 Section + front elevation

A-301

SECTION + FRONT ELEVATION



Cut through the deepest zone; heights to grade, frost line, cantilever, guard

16 x 14 Deck — TimberTech Prime+ Sea Salt Gray, Fulton rail

GSX · Jade Pender 303-550-9558 · September 30, 2026 · Rev 0 FOR REVIEW

SECTION through zone A at 7'-10 1/2" — looking toward the left end

FRONT ELEVATION — from the yard

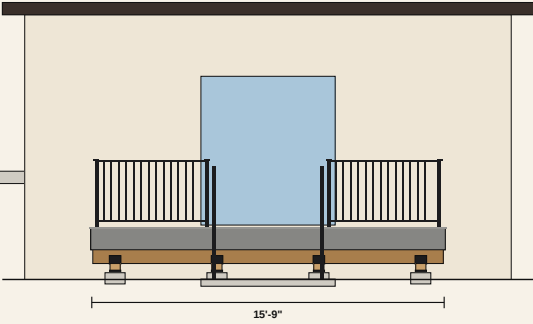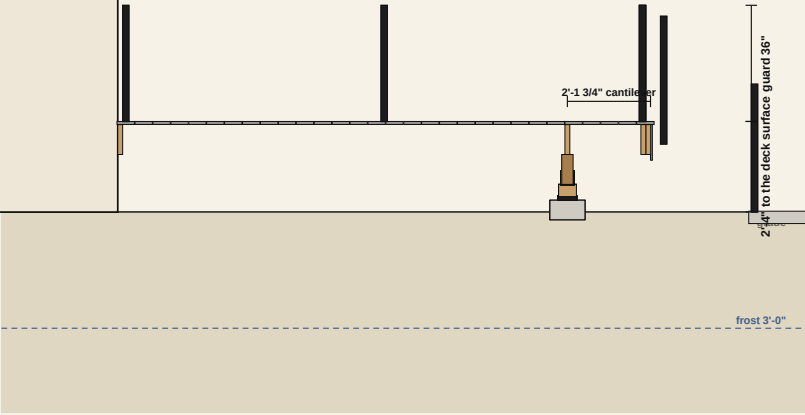


SECTION NOTES

Deck surface 2'-4" above grade; guard 36" where the drop exceeds 30"
DROP 4x10 DF: 15'-8", 4 posts at 1'-0 1/2" / 5'-7 3/16" / 10'-1 13/16" / 14'-8 1/2" (worst 1,796 lb)
Posts 4 x 6x6 on DP-50/50
2x10 ledger x 15'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 17 fasteners
G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)

Section left · elevation right · not to a common scale


Design intent per 2021 IRC R507 prescriptive. Field verify. Do not scale.

1 LEDGER AT THE HOUSE




2x10 ledger x 15'-0" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 17 fasteners

2 POST · BEAM · CAP




DROP 4x10 DF: 15'-8", 4 posts at 1'-0" 1/2" 7/5-7 3/16" / 10'-1 13/16" / 14'-8 1/2" (worst 1,796 lb)

3 FOOTING · POST BASE

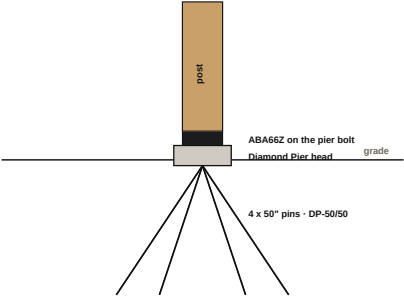


4 RAIL POST · GUARD

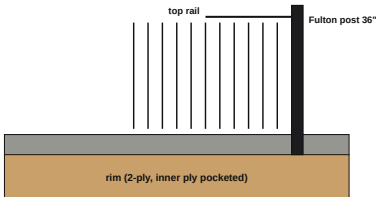

Fulton 36" — 8 posts (2 CORNER, 4 END, 2 LINE) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post

5 DECK EDGE · BORDER



100% hidden — Camo EdgeClip 3/16" at every joist in every gap (13 bearing points x 29 gaps = 377); board ends clipped on the PF joists, never screwed

6 BLOCKING

Blocking one row over the beam, staggered up and down so every block can be end-nailed.



Step 1 • Footings — 4 Diamond Pier DP-50/50 driven-pin footings

T-400 • Step 1 • Footings

GOES IN

- (4) Diamond Pier DP-50/50 (head + 4 x 50" pins, plugs, caps)
- (4) Simpson ABA66Z adjustable post base 6x6 on the pier bolt

HOW

- Call 811 and locate before any hole or pin. Strip the existing deck first.
- Pull the beam lines from the house wall: DROP 4x10 DF at 11'-7 1/4" from the reference wall, posts at 1'-0 1/2" / 5'-7 3/16" / 10'-1 13/16" / 14'-8 1/2".
- Set 4 Diamond Pier heads level at grade on undisturbed soil and drive the 4 pins in each; caps on.

CHECK

- Footings on the layout within 1/2"; bearing on undisturbed soil
- Pins fully driven, heads level
- Photos before backfill



Step 2 • Posts — 6x6 #2 GC on ZMAX bases

T-401 • Step 2 • Posts

GOES IN

- (1) 6x6x8 #2 GC
- (4) Simpson ABA66Z adjustable post base 6x6 on the pier bolt

HOW

- 6x6 posts on the bases; cut so the beam top lands at the joist bottom (drop beam) or the joist top (flush beam): DROP 4x10 DF posts 6" — field-measure each.
- Plumb both ways, brace, then the caps go on with the beams.

CHECK

- Posts plumb to a string; tops on the beam line
- No post in ground contact without a standoff

T-403 · Step 4 · Beams

GOES IN

- (1) 2x6x12 #1 True Frame Joist SYP GC
- (1) 4x10x16 Douglas Fir #2
- (1) 6x6x8 #2 GC
- (4) Simpson BC46Z post cap 6x post / 4x beam

HOW

- DROP 4x10 DF: 15'-8" one piece, 4 posts @ 4'-6 11/16" max
- Crown up, strung straight, caps screwed off with the SDS screws in the box.

CHECK

- Beam top = joist bottom (drop) / joist top (flush)
- Splices land on a post; caps fully fastened



Step 4 · Beams — DROP 4x10 DF (4 posts)

T-404 · Step 5 · Frame

GOES IN

- (2) 2x10x12 #1 True Frame Joist SYP GC
- (17) 2x10x14 #1 True Frame Joist SYP GC
- (3) 2x10x16 #1 True Frame Joist SYP GC
- (26) Simpson LUS28Z face-mount hanger 2x8/2x10
- (4) Simpson HUCQ210-2-SDS concealed-flange double 2x10 hanger (SDS screws included)
- (1) Camo 9ga HDG hanger nail 3" 5 lb (~350)
- (1) Camo 9ga HDG hanger nail 1-1/2" 5 lb (~650)
- (1) FastenMaster LedgerLOK 3-5/8" 50 ct
- (15) Simpson H2.5AZ hurricane tie (joists to the drop beam, hidden)
- (1) Ledger flashing set: SA membrane 6"x75' + (2) 10' alum. Z + end dams
- (4) Nichigo G-Tape 3035 2" x 65' black

HOW

- 2x10 ledger x 15'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 17 fasteners
- A: 11 joists @ 16" OC x 13'-4 1/2". Crown up, hangers at the ledger.
- Blocking one row over the beam, staggered.
- G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)

CHECK

- Frame square: diagonals within 1/8"
- Every hanger fully nailed; ledger fasteners per the schedule
- Tape continuous; photos of the ledger, hangers and footings before decking



Step 5 · Frame — 2x10 joists at 16", rims, ledger, blocking over the beam

T-405 · Step 6 · Decking

GOES IN

- (29) TimberTech Prime+ Sea Salt Gray 1x6x16 Grooved
- (2) TimberTech Prime+ Sea Salt Gray 1x6x16 Square Edge — borders
- (1) TimberTech Prime+ Sea Salt Gray 1x6x20 Square Edge — borders
- (4) TimberTech Prime+ Fascia Sea Salt Gray 0.58x11.95x12
- (5) Camo EdgeClip 3/16" 410SS Black 90 ct
- (1) Starborn Cap-Tor xd 2-3/4" Epoxy Sea Salt Gray 350 ct

HOW

- 100% hidden — Camo EdgeClip 3/16" at every joist in every gap (13 bearing points x 29 gaps = 377); board ends clipped on the PF joists, never screwed
- Cap-Tor xd color-matched ONLY at: first row 1 per joist on the house edge · borders 2 per bearing point @ 16" · fascia 2 at each board end then alternate top/bottom every 12", pre-drilled · stair treads 2 per stringer per board
- Rows per zone: A 29. Borders and breakers first, then the field rows from the outer edge toward the house.

CHECK

- 3/16" gaps held
- No cut end shows at the outer edge
- Color: every board from the same run



Step 6 · Decking — TimberTech Prime+ Sea Salt Gray, Sea Salt Gray border, hidden fasteners

T-406 · Step 7 · Rail

GOES IN

- (2) TimberTech Fulton Rail 6' x 36" level panel Black
- (4) TimberTech Fulton Rail 8' x 36" level panel Black (pre-assembled steel balusters, cut to bay)
- (2) TimberTech Fulton 2" CORNER post 36" Black w/ brackets, cap, skirt
- (4) TimberTech Fulton 2" END post 36" Black w/ brackets, cap, skirt
- (2) TimberTech Fulton 2" LINE post 36" Black w/ brackets, cap, skirt
- (1) Rust-Oleum flat black touch-up (cut ends)

HOW

- Fulton 36" — 8 posts (2 CORNER, 4 END, 2 LINE) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post

CHECK

- Top of rail 36" above the decking; posts plumb
- Cables tensioned / balusters under 4" clear
- End of construction



Step 7 · Rail — Fulton 36" Black



The interactive 3D model lives at the online version of this document.

GS Exterior Experts · Deck Division

Prices: rate card · GC at cost · 42.5% GM · financed ÷ 0.93 unless the job says otherwise. Internal — not for the homeowner.