

GS EXTERIOR EXPERTS · DECK DIVISION · PERMIT SET

1675 Summit Point Ct · Permit Set

Main deck with porch cover, and the 10 x 10 · 1675 Summit Point Ct, Colorado
Springs, CO 80919 · September 26, 2026

SHEET INDEX

- | | |
|--|--|
| 1. Main deck with porch cover · G-001 General notes · design criteria | 7. Main deck with porch cover · D-501 Details |
| 2. Main deck with porch cover · S-100 Foundation plan | 8. 10 x 10 deck · G-001 General notes · design criteria |
| 3. Main deck with porch cover · S-101 Framing plan | 9. 10 x 10 deck · S-100 Foundation plan |
| 4. Main deck with porch cover · A-101 Decking plan | 10. 10 x 10 deck · S-101 Framing plan |
| 5. Main deck with porch cover · A-201 Railing plan + elevation | 11. 10 x 10 deck · A-101 Decking plan |
| 6. Main deck with porch cover · A-301 Section + front elevation | 12. 10 x 10 deck · A-201 Railing plan + elevation |
| | 13. 10 x 10 deck · A-301 Section + front elevation |
| | 14. 10 x 10 deck · D-501 Details |

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale. This set carries no pricing.

Main deck with porch cover · G-001 · General notes · design criteria

G-001

GENERAL NOTES · DESIGN CRITERIA

Loads, codes, structure summary, sheet index, site — the permit-set cover

1675 Summit Point Ct — Deck with Porch Cover · 1675 Summit Point Ct,...

GSX · Jade Pender 303-550-9558 · September 26, 2026 · Rev 0 · PERMIT SET

PROJECT

1675 Summit Point Ct — Deck with Porch Cover

1675 Summit Point Ct, Colorado Springs CO 80919

Prepared for William Wright

431.2 SF · 8'-0" above grade · 4 zones

DESIGN CRITERIA

Deck live load

Ground snow

Dead load

Roof snow (cover)

Design total

Wind

Frost depth

Soil bearing

Seismic

Wildfire (WUI)

Codes

Engineering

40 psf uniform (IRC Table R301.5); guards 200 lb concentrated / 50 plf

30 psf (ground; deck design uses the larger of snow and live) — 40 psf live governs

10 psf deck · 15 psf porch cover (standing seam steel on sheathing, Hardie soffit; 12 psf actual, 15 used) carried on the deck posts

30 psf flat-roof design snow (PPRBD minimum 30 psf), drift at the house wall per ASCE 7 Ch. 7

50 psf on the deck · cover posts add roof snow + dead to the deck frame and footings (engineered)

115 mph Vult, Exposure C, Risk Cat. II (ASCE 7-16) — confirm special wind region

2'-6" (footings bear below)

1,500 psf presumptive (IRC R401.4.1) — no soils report

B

Ignition-resistant construction: Class A / WUI-listed decking (TimberTech Advanced PVC), noncombustible rail (steel), fiber-cement skirt, soffit and fascia, 26 ga flashing at every wall, Class A noncombustible standing seam steel roof on the cover with metal eave / rake / 2021 IRC as amended by Pikes Peak Regional Building Dept; IRC R507 decks; ASCE 7-16 loads; IWUIC / Colorado Springs Wildland-Urban Interface Code; Tables R507.5 / R507.6 / R507.4 / R507.9

Stamped structural set by a Colorado PE required — the stamped set governs

STRUCTURE

Footings

Posts

Beams

Joists

Rims

Ledger

Decking

Rail

24" concrete piers 3'-0" deep

11 x 6x6

DROP (2)2x10 SYP W: 5'-11", 2 posts at 1'-0 1/2" / 4'-11 1/2" (worst 2,052 lb); DROP (2)2x10 SYP W+N+B+P: 36'-11", 7 posts at 1'-0 1/2" / 6'-0" / 10'-6" / 15'-9" / 21'-0" / 28'-5 3/4" / 35'-11

40 2x10 #1 True Frame Joist SYP GC @ 12" OC

2-ply 2x10 front and sides

2x10 ledger x 37'-0" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 38 fasteners

TimberTech Vintage Weathered Teak — 113 rows parallel to the house, picture frame in Vintage Weathered Teak, 3/16" gaps, Cortex

Cinch 36" Satin Black: 10 bays, 11 posts, 72.5 LF + drink rail

SHEET INDEX

G-001

A-001

S-100

S-101

A-101

A-201

A-301

D-501

General notes · design criteria

Isometric · renders

Foundation plan

Framing plan

Decking plan

Railing plan + elevation

Section + front elevation

Details

SITE

Rear / front lot line: deck edge 62.8' from the line, 25' required

Side lot line: deck edge 7.6' from the line, 5' required

Easement: Check the plat for rear/side utility + drainage easements...

Parcel 7311205063 (0.389 ac / 16,961 sf), zoning PDZ HS (Planned Development Zone, dev. plan CPC P 85-68(HS)); overlays WUI-O and Hillside HS-O. Setbacks below are the R-1 6000 / HS base standards (rear 25', side 5') — VERIFY against the recorded development plan and an ILC before layout. Distances are scaled from City GIS building/parcel lines (existing deck footprint): rear line ~62.8', east side line ~7.6' at the stair end, west side ~7.8'. Hillside overlay: grading/retaining review if footing excavation disturbs the slope. WUI-O: ignition-resistant deck surface (Class A PVC), 1/8" ember screening, no combustible skirting.

No scale

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

Main deck with porch cover · S-100 · Foundation plan

S-100

FOUNDATION PLAN

Footings, posts and beam lines with the footing schedule; beams dashed (below the joists)


1675 Summit Point Ct — Deck with Porch Cover · 1675 Summit Point Ct,...
GSX · Jade Pender 303-550-9558 · September 26, 2026 · Rev 0 · PERMIT SET

FOOTING SCHEDULE

24" concrete pier x 3'-0", wet-set standoff base

ID	X	Y	ZONE	LOAD
P1	1'-0 1/2"	-8'-6"	W	2,052 lb
P2	4'-11 1/2"	-8'-6"	W	2,052 lb
P3	1'-0 1/2"	5'-4 1/2"	W	1,576 lb
P4	6'-0"	5'-4 1/2"	W	2,143 lb
P5	10'-6"	5'-4 1/2"	N	1,158 lb
P6	15'-9"	5'-4 1/2"	B	1,247 lb
P7	21'-0"	5'-4 1/2"	B	1,512 lb
P8	28'-5 3/4"	5'-4 1/2"	P	2,337 lb
P9	35'-11 1/2"	5'-4 1/2"	P	1,481 lb
P10	40'-10 5/8"	-1'-9"	stair	carrier
P11	40'-10 5/8"	1'-9"	stair	carrier

x from the left frame face facing the house; y from the reference wall.
Frost 2'-6" · soil 1,500 psf · worst post 2,337 lb

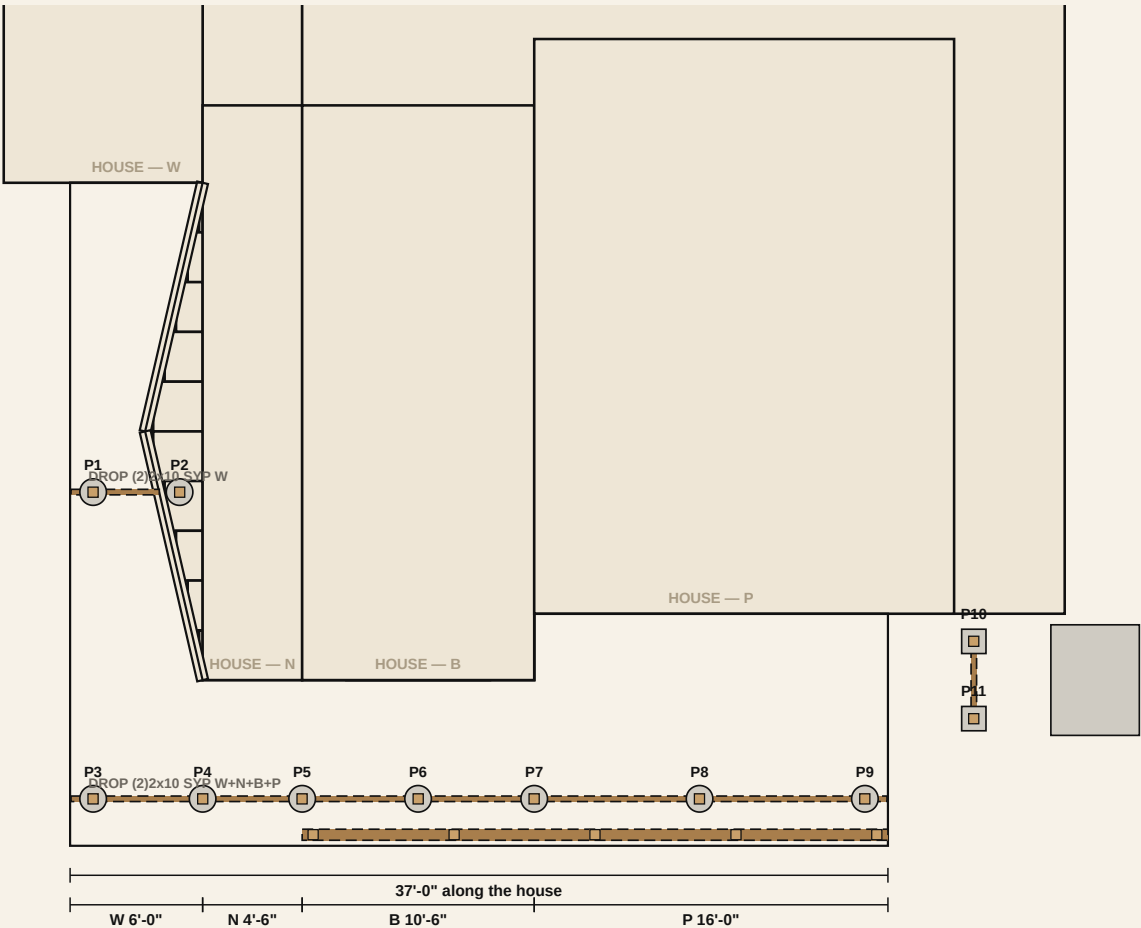

Plan · not to scale · house at the top · dimensions govern

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

Main deck with porch cover · S-101 · Framing plan

S-101

FRAMING PLAN

Ledger, joists, rims, blocking, beams; every member in the model — the cut list is on T-600

1675 Summit Point Ct — Deck with Porch Cover · 1675 Summit Point Ct,...

GSX · Jade Pender 303-550-9558 · September 26, 2026 · Rev 0 · PERMIT SET

FRAMING NOTES

40 2x10 #1 True Frame Joist SYP GC @ 12" OC

2-ply 2x10 front and sides

2x10 ledger x 37'-0" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 38

blocking one row over the beam, staggered

G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)

DROP (2)2x10 SYP W: 5'-11", 2 posts at 1'-0 1/2" / 4'-11 1/2" (worst 2,052 lb);
DROP (2)2x10 SYP W+N+B+P: 36'-11", 7

Connectors:

Simpson LUS28Z face-mount hanger
2x8/2x10: 80

Simpson HUCQ210-2-SDS concealed-flange double 2x10 hanger (SDS screws included): 16


Simpson DTT1Z lateral tie kit w/ SDS screws: 16

Simpson H2.5AZ hurricane tie (joists to the drop beam, hidden): 57

Simpson BC46Z post cap 6x post / 4x beam: 9

7/16" x 4-1/2" HDG hex bolt + nut + 2 washers: 28

Simpson LSCZ adjustable stair-stringer connector: 5

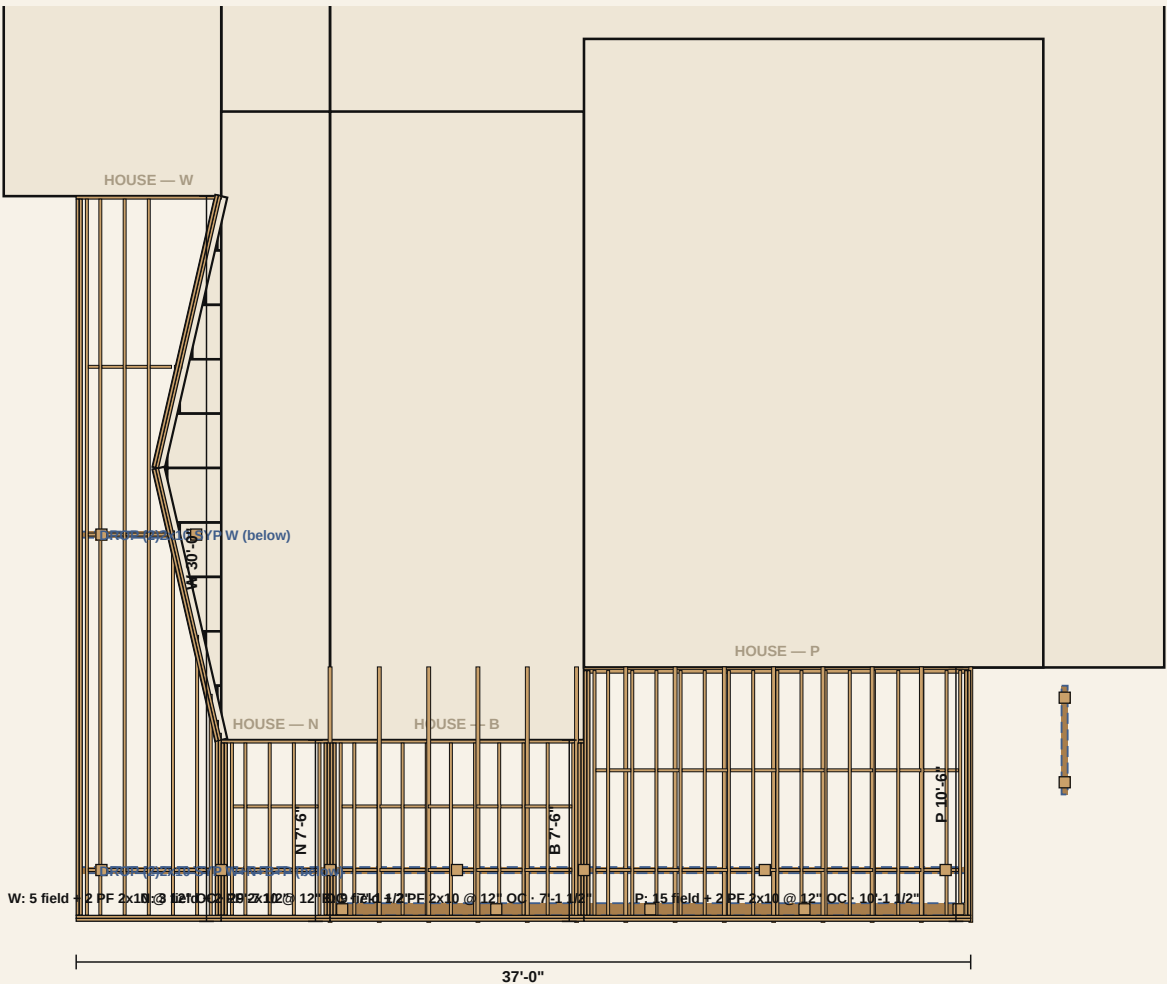

Plan · not to scale · house at the top · dimensions govern

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

Main deck with porch cover · A-101 · Decking plan


A-101

DECKING PLAN

Every board, border and divider as it lays; rail posts shown for the pockets

1675 Summit Point Ct — Deck with Porch Cover · 1675 Summit Point Ct,...

GSX · Jade Pender 303-550-9558 · September 26, 2026 · Rev 0 · PERMIT SET

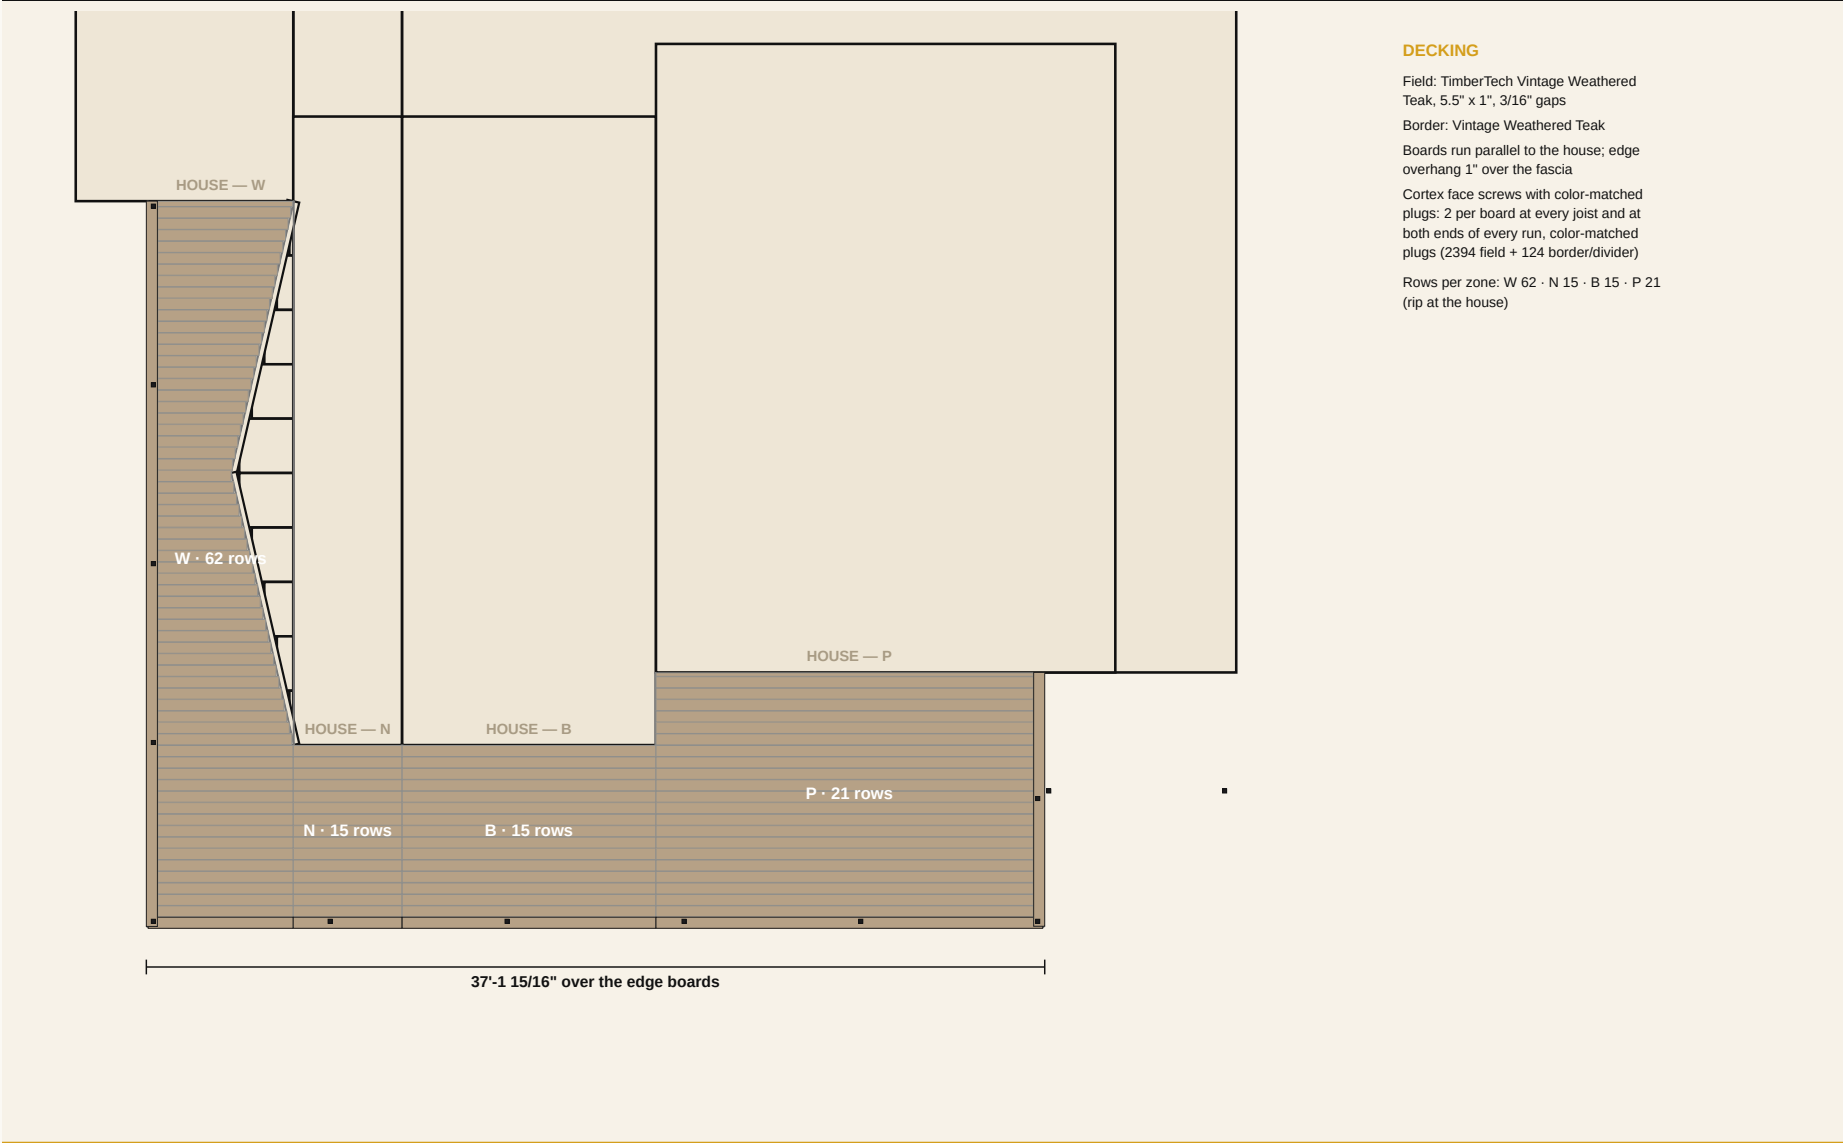

DECKING

Field: TimberTech Vintage Weathered Teak, 5.5" x 1", 3/16" gaps
Border: Vintage Weathered Teak
Boards run parallel to the house; edge overhang 1" over the fascia
Cortex face screws with color-matched plugs: 2 per board at every joist and at both ends of every run, color-matched plugs (2394 field + 124 border/divider)
Rows per zone: W 62 · N 15 · B 15 · P 21 (rip at the house)

Main deck with porch cover · A-201 · Railing plan + elevation


A-201

RAILING PLAN + ELEVATION

Post IDs and types (E end · L line · C corner), bay lengths, outer-edge elevation


1675 Summit Point Ct — Deck with Porch Cover · 1675 Summit Point Ct,...

GSX · Jade Pender 303-550-9558 · September 26, 2026 · Rev 0 · PERMIT SET

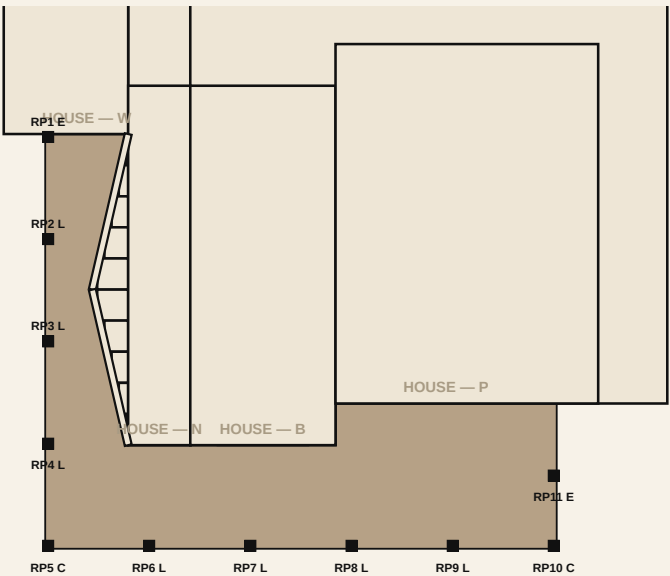

RAILING

Cinch 36" Satin Black: 10 bays, 11 posts, 72.5 LF + drink rail
Cinch 36" — 11 posts (2 CORNER, 2 END, 7 LINE) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post; drink rail board on Cinch drink-rail brackets, mitred at every turn
Bays: end:left 7'-4 3/4" · end:left 7'-4 3/4" · end:left 7'-4 3/4" · front:W+N+B+P 7'-3 13/16" · front:W+N+B+P 7'-3 13/16" · front:W+N+B+P 7'-3 13/16" · front:W+N+B+P 7'-3 13/16" · front:W+N+B+P 7'-3 13/16" · Guard 36" min above the deck; openings under 4" (IRC R312). Rail LF for labor = deck-edge LF of actual rail.

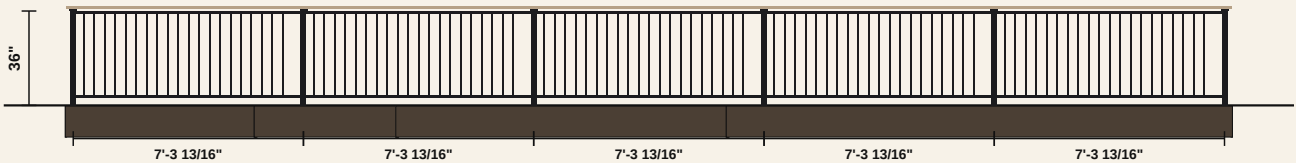

Plan above · elevation of the outer edge below

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

Main deck with porch cover · A-301 · Section + front elevation



A-301

SECTION + FRONT ELEVATION

Cut through the deepest zone; heights to grade, frost line, cantilever, guard

1675 Summit Point Ct — Deck with Porch Cover · 1675 Summit Point Ct,...

GSX · Jade Pender 303-550-9558 · September 26, 2026 · Rev 0 · PERMIT SET

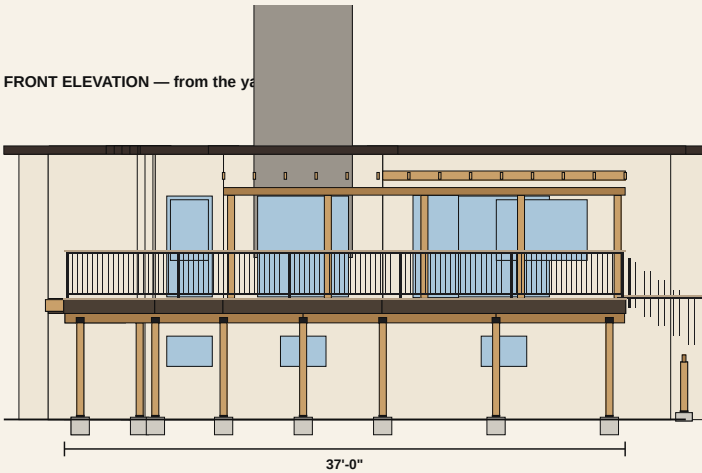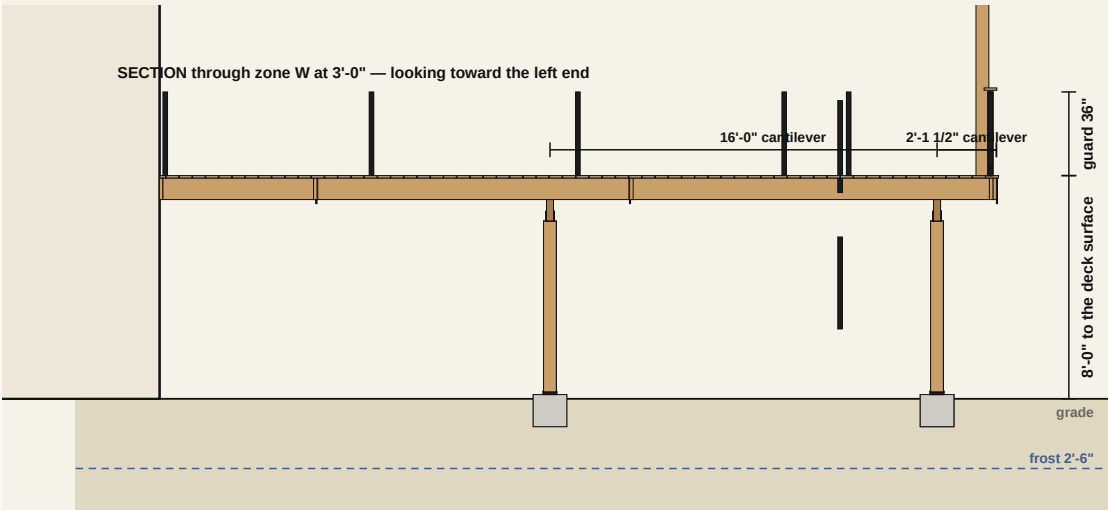

SECTION NOTES

Deck surface 8'-0" above grade; guard 36" where the drop exceeds 30"

DROP (2)2x10 SYP W: 5'-11", 2 posts at 1'-0 1/2" / 4'-11 1/2" (worst 2,052 lb); DROP (2)2x10 SYP W+N+B+P: 36'-11", 7 posts at 1'-0 1/2" / 6'-0" / 10'-6" / 15'-9" / 21'-0" / 28'-5 3/4" /

Posts 11 x 6x6 on 24" concrete piers 3'-0" deep

2x10 ledger x 37'-0" total - LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 38 fasteners

G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)

Main deck with porch cover · D-501 · Details

D-501


DETAILS

Ledger · post / beam / cap · footing · rail post · deck edge · the job's special condition

1675 Summit Point Ct — Deck with Porch Cover · 1675 Summit Point Ct,...


GSX · Jade Pender 303-550-9558 · September 26, 2026 · Rev 0 · PERMIT SET

1 LEDGER AT THE HOUSE

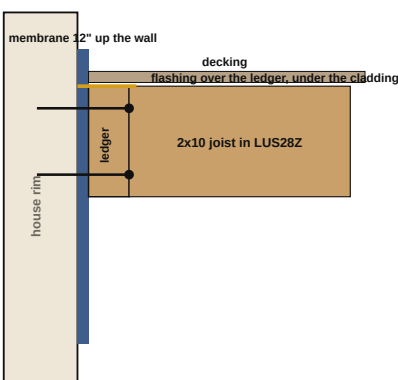


2x10 ledger x 37'-0" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 38 fasteners · 26 ga wall flashing (WUJ)

2 POST · BEAM · CAP

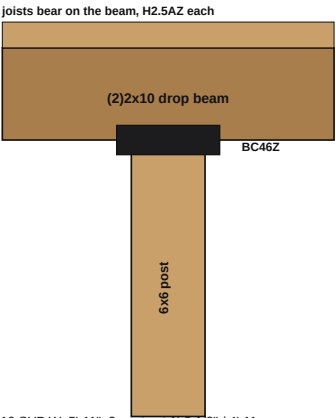


DROP (2)2x10 SYP W: 5'-11", 2 posts at 1'-0" 1/2" / 4'-11 1/2" (worst 2,052 lb); DROP (2)2x10 SYP W+N+B+P: 36'-11", 7 posts at 1'-0" 1/2" / 6'-0" / 10'-

3 FOOTING · POST BASE

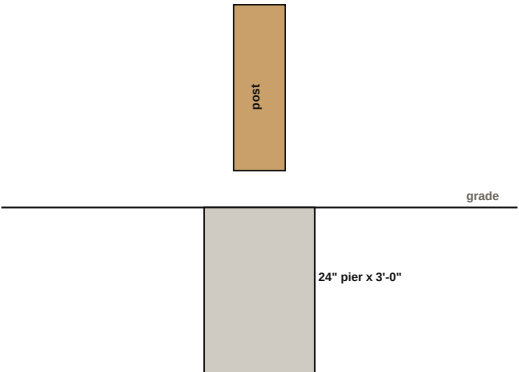


4 RAIL POST · GUARD

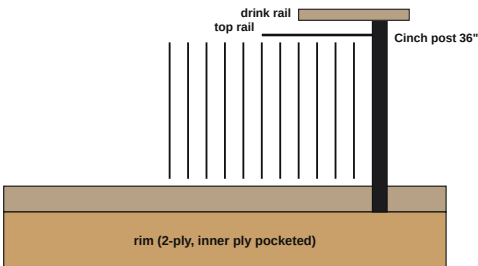

Cinch 36" — 11 posts (2 CORNER, 2 END, 7 LINE) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post; drink rail board on Cinch drink-rail brackets, mitred at every turn

5 DECK EDGE · BORDER

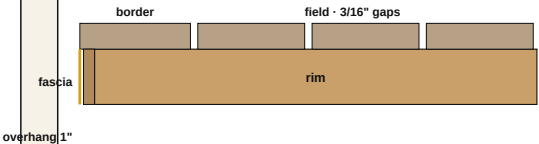

Cortex face screws with color-matched plugs: 2 per board at every joist and at both ends of every run, color-matched plugs (2394 field + 124 border/divider)

6 BLOCKING

Blocking one row over the beam, staggered up and down so every block can be end-nailed.

Schematic details, not to scale

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

10 x 10 deck · G-001 · General notes · design criteria

G-001

GENERAL NOTES · DESIGN CRITERIA

Deck 2 — 10 x 10 · 1675 Summit Point Ct, Colorado Springs

GSX · Jade Pender 303-550-9558 · September 26, 2026 · Rev 0 · PERMIT SET

PROJECT		SHEET INDEX	
Deck 2 — 10 x 10		G-001	General notes · design criteria
1675 Summit Point Ct, Colorado Springs CO 80919		A-001	Isometric · renders
Prepared for William Wright		S-100	Foundation plan
99 SF · 8'-0" above grade · 1 zone		S-101	Framing plan
		A-101	Decking plan
		A-201	Railing plan + elevation
		A-301	Section + front elevation
		D-501	Details
DESIGN CRITERIA		SITE	
Deck live load	40 psf uniform (IRC Table R301.5); guards 200 lb concentrated / 50 plf	Rear / front lot line: deck edge 62.8' from the line, 25' required	
Ground snow	30 psf (ground; deck design uses the larger of snow and live) — 40 psf live governs	Side lot line: deck edge 7.8' from the line, 5' required	
Dead load	10 psf deck	Easement: Check the plat for rear/side utility + drainage easements...	
Roof snow (cover)	—	Same parcel 7311205063, zoning PDZ HS, overlays WUI-O + HS-O. Deck 2	
Design total	50 psf on the deck	sits at the SGD-1 door on the west end — west side line ~7.8' from the	
Wind	115 mph Vult, Exposure C, Risk Cat. II (ASCE 7-16) — confirm special wind region	existing wall face by City GIS; the 10 x 10 projects toward the rear	
Frost depth	2'-6" (footings bear below)	(~62'+ clear). Verify against the development plan CPC P 85-68(HS) and	
Soil bearing	1,500 psf presumptive (IRC R401.4.1) — no soils report	an ILC. PPRBD: 30 psf snow, 30" frost, Vult 115 mph east of the	
Seismic	B	foothills — confirm the lot is not in the 130-150 mph special wind	
Wildfire (WUI)	Ignition-resistant construction: Class A / WUI-listed decking (TimberTech Advanced PVC), noncombustible rail (steel), fiber-cement skirt, soffit and fascia, 26 ga flashing at every wall, Class A roof on the cover; under-deck kept clear of combustibles (Colorado Springs WUI	region.	
Codes	2021 IRC as amended by Pikes Peak Regional Building Dept; IRC R507 decks; ASCE 7-16 loads; IWUIC / Colorado Springs Wildland-Urban Interface Code; Tables R507.5 / R507.6 / R507.4 / R507.9		
Engineering	Prescriptive; no engineering required by this design		
STRUCTURE			
Footings	18" concrete piers 3'-0" deep		
Posts	2 x 6x6		
Beams	DROP (2)2x10 SYP: 9'-8 7/16", 2 posts at 1'-0 1/2" / 8'-8 15/16" (worst 2,239 lb)		
Joists	11 2x10 #1 True Frame Joist SYP GC @ 12" OC x 9'-5 1/2"		
Rims	2-ply 2x10 front and sides		
Ledger	2x10 ledger x 9'-9 7/16" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 11 fasteners		
Decking	TimberTech Vintage Weathered Teak — 20 rows parallel to the house, picture frame in Vintage Weathered Teak, 3/16" gaps, Cortex		
Rail	Cinch 36" Satin Black: 6 bays, 7 posts, 29 LF + drink rail		

10 x 10 deck · S-100 · Foundation plan


S-100

FOUNDATION PLAN

Footings, posts and beam lines with the footing schedule; beams dashed (below the joists)

Deck 2 — 10 x 10 · 1675 Summit Point Ct, Colorado Springs

GSX · Jade Pender 303-550-9558 · September 26, 2026 · Rev 0 · PERMIT SET

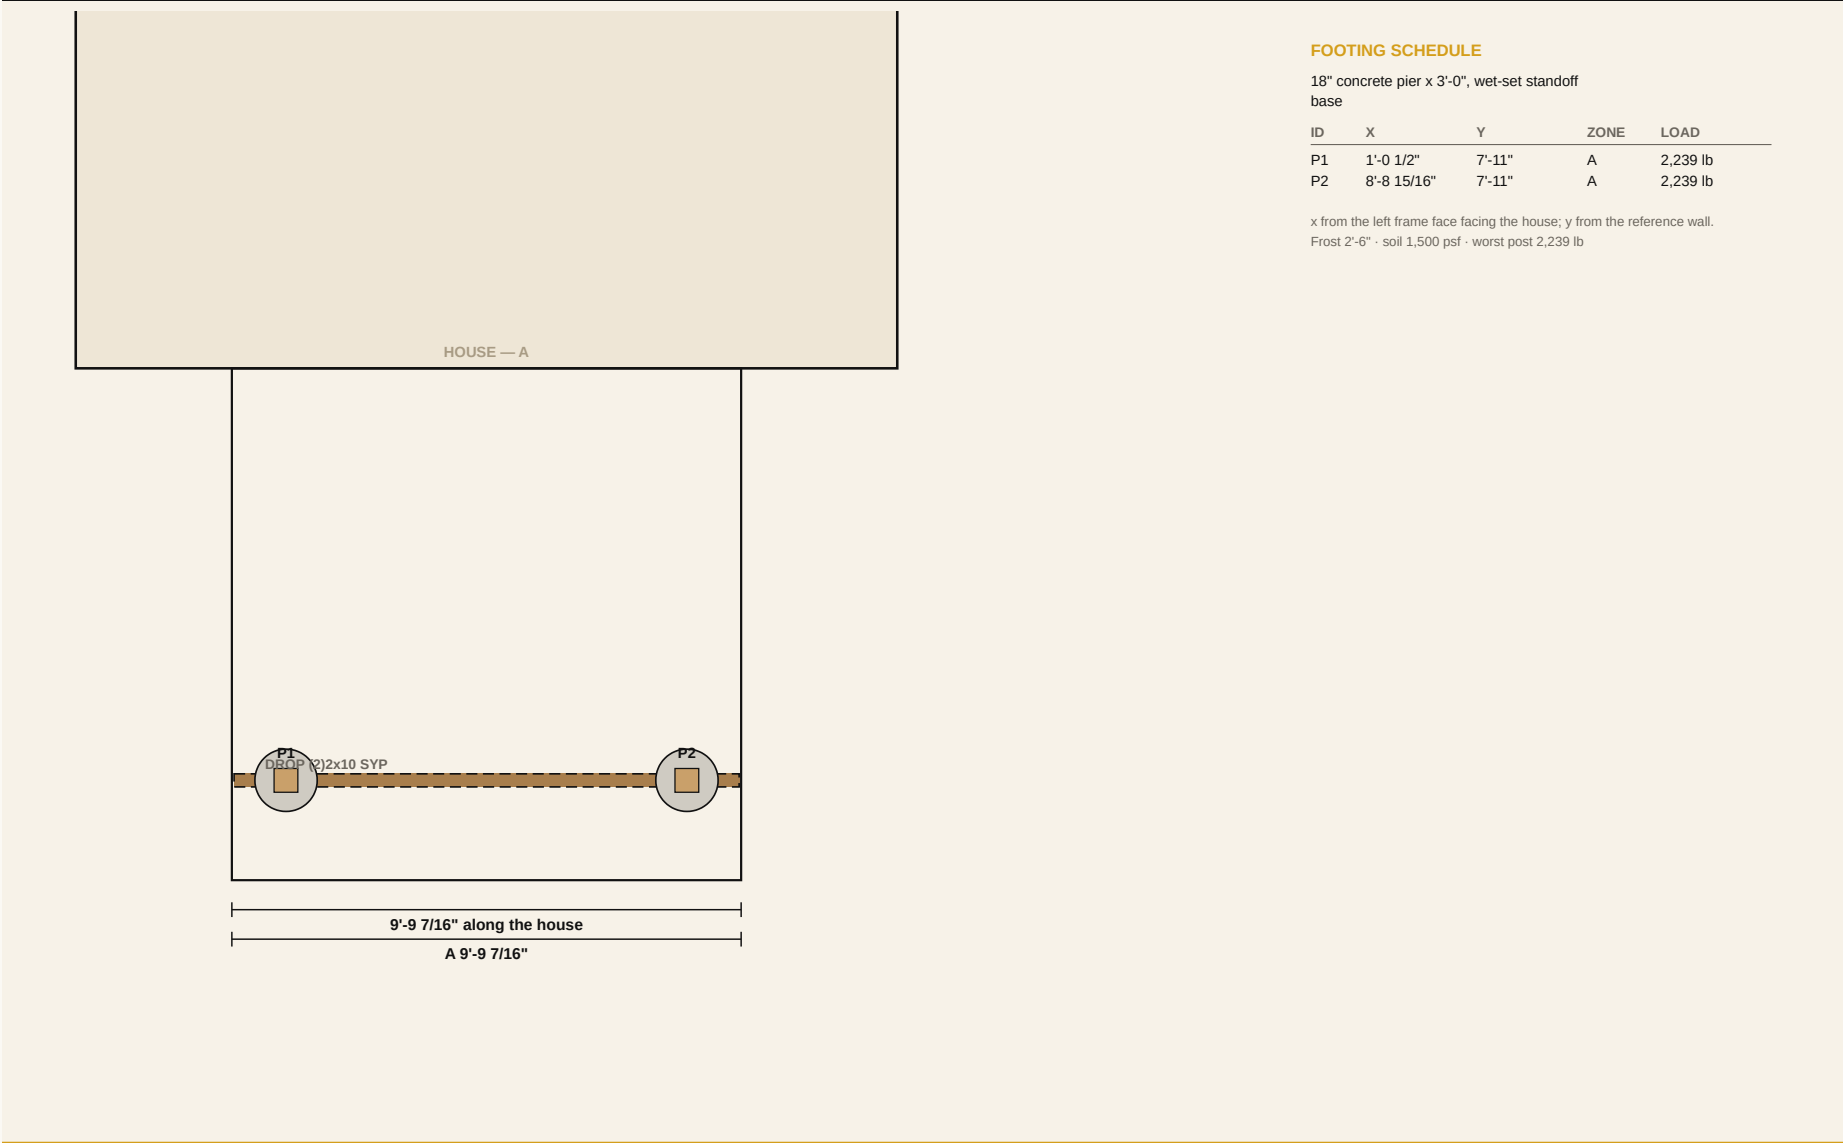

FOOTING SCHEDULE

18" concrete pier x 3'-0", wet-set standoff base

ID	X	Y	ZONE	LOAD
P1	1'-0 1/2"	7'-11"	A	2,239 lb
P2	8'-8 15/16"	7'-11"	A	2,239 lb

x from the left frame face facing the house; y from the reference wall.
Frost 2'-6" · soil 1,500 psf · worst post 2,239 lb

10 x 10 deck · S-101 · Framing plan

S-101

FRAMING PLAN

Ledger, joists, rims, blocking, beams; every member in the model — the cut list is on T-600

Deck 2 — 10 x 10 · 1675 Summit Point Ct, Colorado Springs

GSX · Jade Pender 303-550-9558 · September 26, 2026 · Rev 0 · PERMIT SET



FRAMING NOTES

11 2x10 #1 True Frame Joist SYP GC @ 12"
OC x 9'-5 1/2"

2-ply 2x10 front and sides

2x10 ledger x 9'-9 7/16" total ·
LedgerLOK 2 rows 2" from top/bottom,
staggered 12" OC, first 3" from each end
blocking one row over the beam,
staggered

G-Tape 2" every joist, PF joist,
blocking and the ledger top · 4" on both
rims and the beam(s)

DROP (2)2x10 SYP: 9'-8 7/16", 2 posts at
1'-0 1/2" / 8'-8 15/16" (worst 2,239 lb)

Connectors:

Simpson LUS28Z face-mount hanger
2x8/2x10: 22

Simpson HUCQ210-2-SDS concealed-flange
double 2x10 hanger (SDS screws
included): 4

Simpson DTT1Z lateral tie kit w/ SDS
screws: 4

Simpson H2.5AZ hurricane tie (joists to
the drop beam, hidden): 13

Simpson BC46Z post cap 6x post / 4x
beam: 2

7/16" x 4-1/2" HDG hex bolt + nut + 2
washers: 14

Design intent per 2021 IRC R507 prescriptive. Field verify. Do not scale.

10 x 10 deck · A-201 · Railing plan + elevation


A-201

RAILING PLAN + ELEVATION

Post IDs and types (E end · L line · C corner), bay lengths, outer-edge elevation

Deck 2 — 10 x 10 · 1675 Summit Point Ct, Colorado Springs

GSX · Jade Pender 303-550-9558 · September 26, 2026 · Rev 0 · PERMIT SET

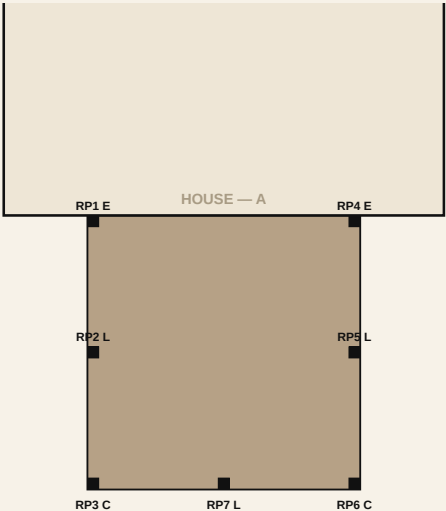

RAILING

Cinch 36" Satin Black: 6 bays, 7 posts,
29 LF + drink rail

Cinch 36" — 7 posts (2 CORNER, 2 END, 3
LINE) inside the outer rim ply, inner
ply pocketed 2" wide, (2) 7/16" x 4-1/2"
bolts per post; drink rail board on
Cinch drink-rail brackets, mitred at
every turn

Bays: left 4'-8 1/2" · left 4'-8 1/2" ·
right 4'-8 1/2" · right 4'-8 1/2" ·
front 4'-8 1/4" · front 4'-8 1/4"

Guard 36" min above the deck; openings
under 4" (IRC R312). Rail LF for labor =
deck-edge LF of actual rail.



Plan above · elevation of the outer edge below

Design intent per 2021 IRC R507 prescriptive. Field verify. Do not scale.

10 x 10 deck · A-301 · Section + front elevation


A-301

SECTION + FRONT ELEVATION


Cut through the deepest zone; heights to grade, frost line, cantilever, guard

Deck 2 — 10 x 10 · 1675 Summit Point Ct, Colorado Springs

GSX · Jade Pender 303-550-9558 · September 26, 2026 · Rev 0 · PERMIT SET

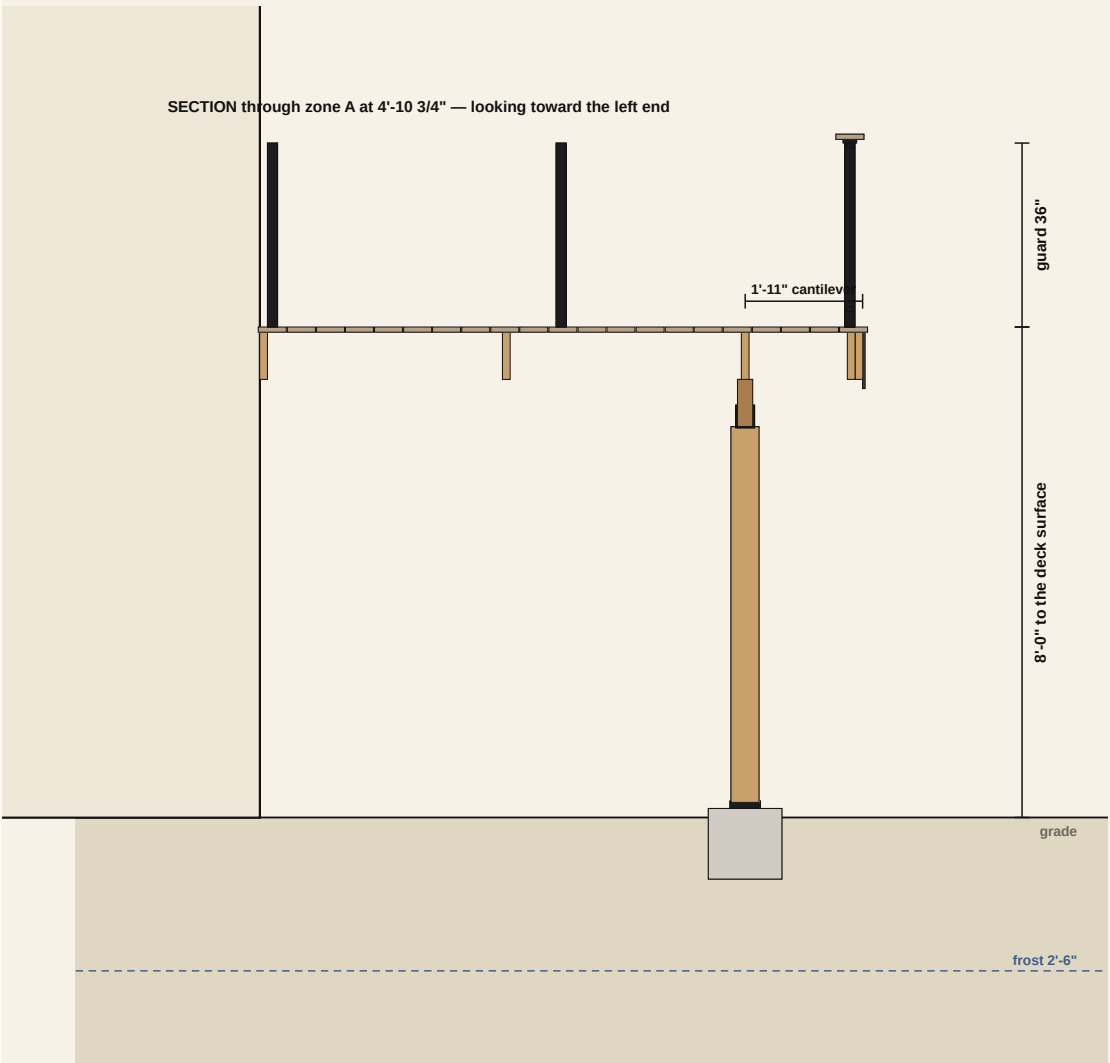

FRONT ELEVATION — from the yard

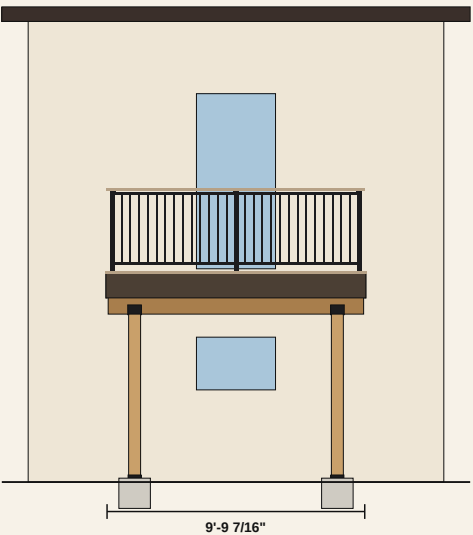

SECTION NOTES

Deck surface 8'-0" above grade; guard 36" where the drop exceeds 30"

DROP (2)2x10 SYP: 9'-8 7/16", 2 posts at 1'-0 1/2" / 8'-8 15/16" (worst 2,239 lb)

Posts 2 x 6x6 on 18" concrete piers 3'-0" deep

2x10 ledger x 9'-9 7/16" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 11 fasteners

G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)

Section left · elevation right · not to a common scale

Design intent per 2021 IRC R507 prescriptive. Field verify. Do not scale.

10 x 10 deck · D-501 · Details

D-501


DETAILS

Ledger · post / beam / cap · footing · rail post · deck edge · the job's special condition

Deck 2 — 10 x 10 · 1675 Summit Point Ct, Colorado Springs


GSX · Jade Pender 303-550-9558 · September 26, 2026 · Rev 0 · PERMIT SET

1 LEDGER AT THE HOUSE

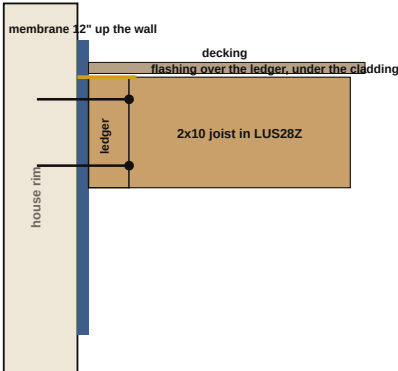


2x10 ledger x 9'-9 7/16" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 11 fasteners · 26 ga wall flashing (WUJ)

2 POST · BEAM · CAP

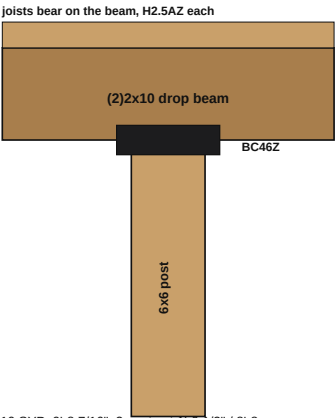


DROP (2)2x10 SYP: 9'-8 7/16", 2 posts at 1'-0 1/2" / 8'-8 15/16" (worst 2,239 lb)

3 FOOTING · POST BASE

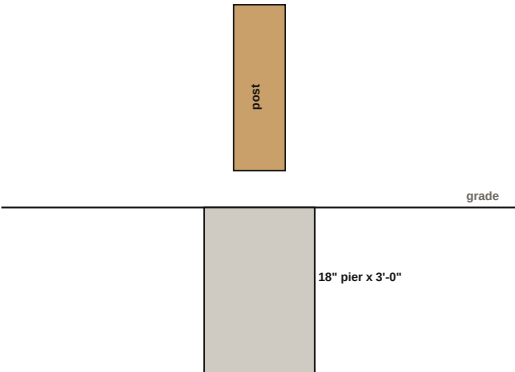


4 RAIL POST · GUARD

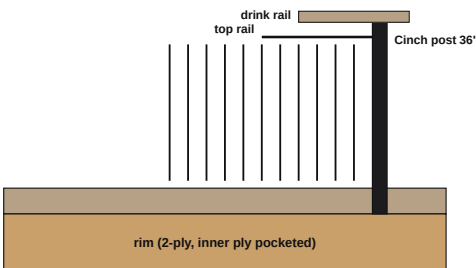

Cinch 36" — 7 posts (2 CORNER, 2 END, 3 LINE) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post; drink rail board on Cinch drink-rail brackets, mitred at every turn

5 DECK EDGE · BORDER

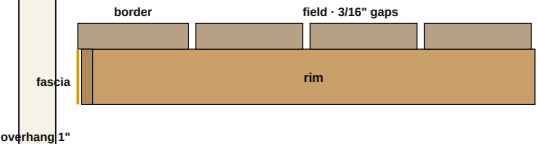

Cortex face screws with color-matched plugs: 2 per board at every joist and at both ends of every run, color-matched plugs (444 field + 62 border/divider)

6 BLOCKING

Blocking one row over the beam, staggered up and down so every block can be end-nailed.

Schematic details, not to scale

Design intent per 2021 IRC R507 prescriptive. Field verify. Do not scale.

Main deck with porch cover



From the yard



From the front corner



Isometric



Under the deck

10 x 10 deck



From the yard



From the front corner



Isometric



Under the deck