GS EXTERIOR EXPERTS · DECK DIVISION · PERMIT SET

1675 Summit Point Ct · Deck 2 (8' x 8') · Permit Set

1675 Summit Point Ct, Colorado Springs · William Wright · Deck 2, 8' x 8' at the west door · TimberTech Vintage English Walnut, Cortex face screws · Cinch Satin Black rail with English Walnut drink rail · October 22, 2026

SHEET INDEX

1. Deck 2 — 8' x 8' · **G-001** General notes · design criteria
2. Deck 2 — 8' x 8' · **C-100** Site plan
3. Deck 2 — 8' x 8' · **A-002** Isometric — assembled, labeled
4. Deck 2 — 8' x 8' · **A-003** Isometric — exploded, labeled
5. Deck 2 — 8' x 8' · **S-100** Foundation plan
6. Deck 2 — 8' x 8' · **S-101** Framing plan
7. Deck 2 — 8' x 8' · **S-102** Structure isometric, labeled
8. Deck 2 — 8' x 8' · **A-101** Decking plan
9. Deck 2 — 8' x 8' · **A-201** Railing plan + elevation
10. Deck 2 — 8' x 8' · **A-202** Elevations
11. Deck 2 — 8' x 8' · **A-301** Section + front elevation
12. Deck 2 — 8' x 8' · **D-501** Details
13. Deck 2 — 8' x 8' · **D-502** Connection details — frame
14. Deck 2 — 8' x 8' · **D-504** Connection details — deck edge, rail, lateral

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale. This set carries no pricing.

Deck 2 — 8' x 8' · G-001 · General notes · design criteria

G-001 GENERAL NOTES · DESIGN CRITERIA

Loads, codes, structure summary, sheet index, site — the permit-set cover

Deck 2 — 8 x 8 · 1675 Summit Point Ct, Colorado Springs

GSX · Jade Pender 303-550-9558 · October 22, 2026 · Rev 0 · PERMIT SET

PROJECT

Deck 2 — 8 x 8
1675 Summit Point Ct, Colorado Springs CO 80919
Prepared for William Wright
60 SF · 8'-0" above grade · 1 zone

DESIGN CRITERIA

Deck live load	40 psf uniform (IRC Table R301.5); guards 200 lb concentrated / 50 plf
Ground snow	30 psf (ground; deck design uses the larger of snow and live) — 40 psf live governs
Dead load	10 psf deck
Roof snow (cover)	—
Design total	50 psf on the deck
Wind	115 mph Vult, Exposure C, Risk Cat. II (ASCE 7-16) — confirm special wind region
Frost depth	2'-6" (footings bear below)
Soil bearing	1,500 psf presumptive (IRC R401.4.1) — no soils report
Seismic	B
Wildfire (WUI)	Ignition-resistant construction: Class A / WUI-listed decking (TimberTech Advanced PVC), noncombustible rail (steel), fiber-cement skirt, soffit and fascia, 26 ga flashing at every wall, Class A roof on the cover; under-deck kept clear of combustibles (Colorado Springs WUI
Codes	2021 IRC as amended by Pikes Peak Regional Building Dept; IRC R507 decks; ASCE 7-16 loads; IWUIC / Colorado Springs Wildland-Urban Interface Code; Tables R507.5 / R507.6 / R507.4 / R507.9
Engineering	Prescriptive; no engineering required by this design

STRUCTURE

Footings	16" concrete piers 3'-0" deep
Posts	2 x 6x6
Beams	DROP (2)2x10 SYP: 7'-8 7/16", 2 posts at 1'-0 1/2" / 6'-8 15/16" (worst 1,259 lb)
Joists	9 2x10 #1 True Frame Joist SYP GC @ 12" OC x 7'-1 1/2"
Rims	2-ply 2x10 front and sides
Ledger	2x10 ledger x 7'-9 7/16" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 9 fasteners
Decking	TimberTech Vintage English Walnut — 15 rows parallel to the house, picture frame in Vintage English Walnut, 3/16" gaps, Cortex
Rail	Cinch 36" Satin Black: 3 bays, 4 posts, 23 LF + drink rail

SHEET INDEX

G-001	General notes · design criteria
C-100	Site plan
A-001	Isometric · renders
A-002	Isometric — assembled, labeled
A-003	Isometric — exploded, labeled
S-100	Foundation plan
S-101	Framing plan
S-102	Structure isometric, labeled
A-101	Decking plan
A-201	Railing plan + elevation
A-202	Elevations
A-301	Section + front elevation
D-501	Details

SITE

Rear / front lot line: deck edge 62.8' from the line, 25' required
Side lot line: deck edge 7.8' from the line, 5' required
Easement: Check the plat for rear/side utility + drainage easements…
Same parcel 7311205063, zoning PDZ HS, overlays WUI-O + HS-O. Deck 2 sits at the SGD-1 door on the west end — west side line ~7.8' from the existing wall face by City GIS; the 10 x 10 projects toward the rear (~62'+ clear). Verify against the development plan CPC P 85-68(HS) and an ILC. PPRBD: 30 psf snow, 30" frost, Vult 115 mph east of the foothills — confirm the lot is not in the 130-150 mph special wind region.


Deck 2 — 8' x 8' · C-100 · Site plan

C-100 **SITE PLAN**

Parcel, existing house, the new deck, distances to the lot lines, setbacks

Deck 2 — 8 x 8 · 1675 Summit Point Ct, Colorado Springs

GSX · Jade Pender 303-550-9558 · October 22, 2026 · Rev 0 · PERMIT SET

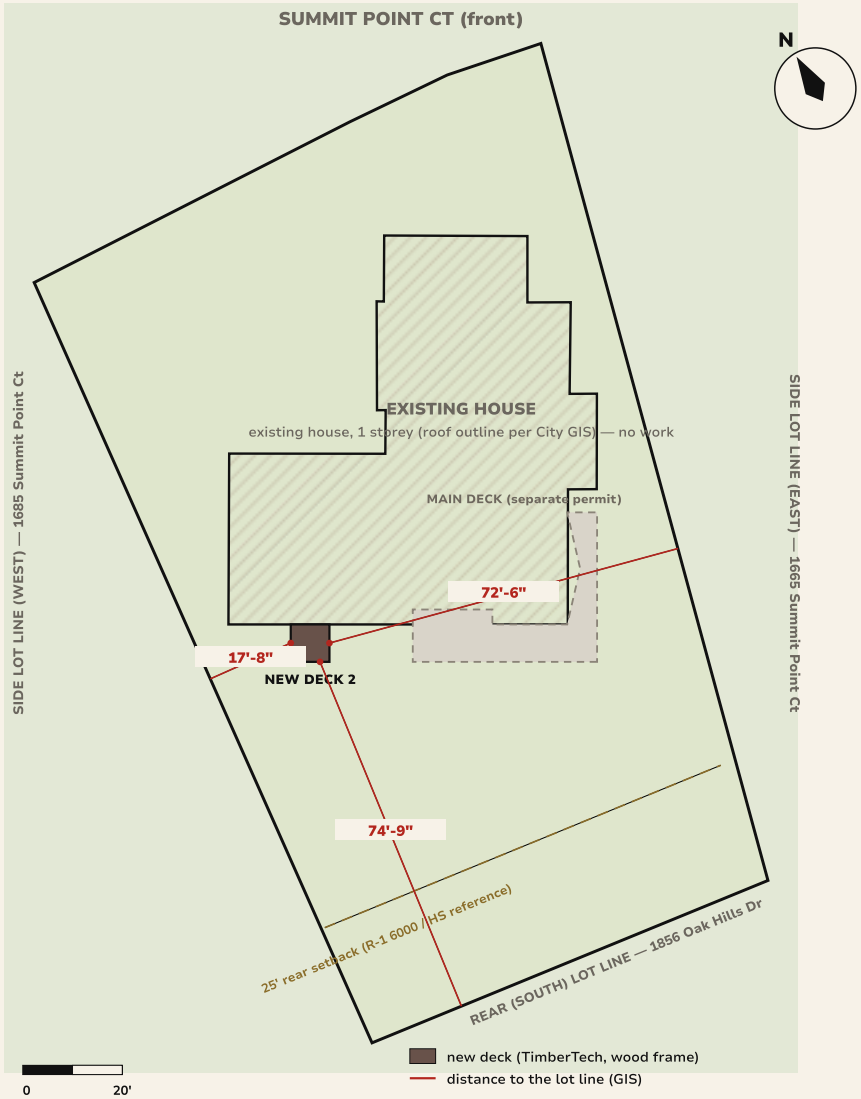

PARCEL

1675 Summit Point Ct, Colorado Springs CO 80919
Parcel 7311205063 · 16,961 SF (0.389 ac) · City of Colorado Springs
Zoning PDZ HS (dev. plan CPC P 85-68(HS)) · overlays WUI-O + Hillside HS-O
House: 1 storey, ~3,989 SF roof outline (City GIS)
Street: Summit Point Ct (front, north) · neighbours 1685 (W), 1665 (E), 1856 Oak Hills Dr (S)

LOT COVERAGE

Lot area	16,961 SF
Deck 2 (this permit)	8' x 8', 8' above grade, at the west-end door
Main deck (separate permit)	~431 SF with porch cover, east of Deck 2

SETBACKS

Measured (red) from Deck 2 to the nearest lot lines — GIS, not survey
West side: about 12' clear to the west lot line (5' side setback)
Measured (red): to the nearest lot line from the new work — GIS, not survey

SITE WORK

· Remove the existing small deck at the west-end door and haul off
· Two concrete piers 3' deep (frost 30"), 6x6 posts, drop beam, ledger to the house
· No stair — reached from the house door only
· Call 811 before digging

City of Colorado Springs GIS: E911 address point, LandRecords parcel 7311205063, BuildingsImpSurfaces footprint (roof/drip line), Transportation streets, 2018 / 2022 / current aerials. GIS lines are not a survey; deck dimensions are field-measured. An ILC governs if the City asks.

Plan · approx. 1" = 20' at full size · GIS lines, not a survey

Design intent per 2021 IRC R507 prescriptive. Field verify. Do not scale.

Deck 2 — 8' x 8' · A-002 · Isometric — assembled, labeled


A-002

ISOMETRIC — ASSEMBLED, LABELED

Everything you see called out: piers, decking, picture frame, skirt, stair, roof covers, finishes

Deck 2 — 8 x 8 · 1675 Summit Point Ct, Colorado Springs

GSX · Jade Pender 303-550-9558 · October 22, 2026 · Rev 0 · PERMIT SET

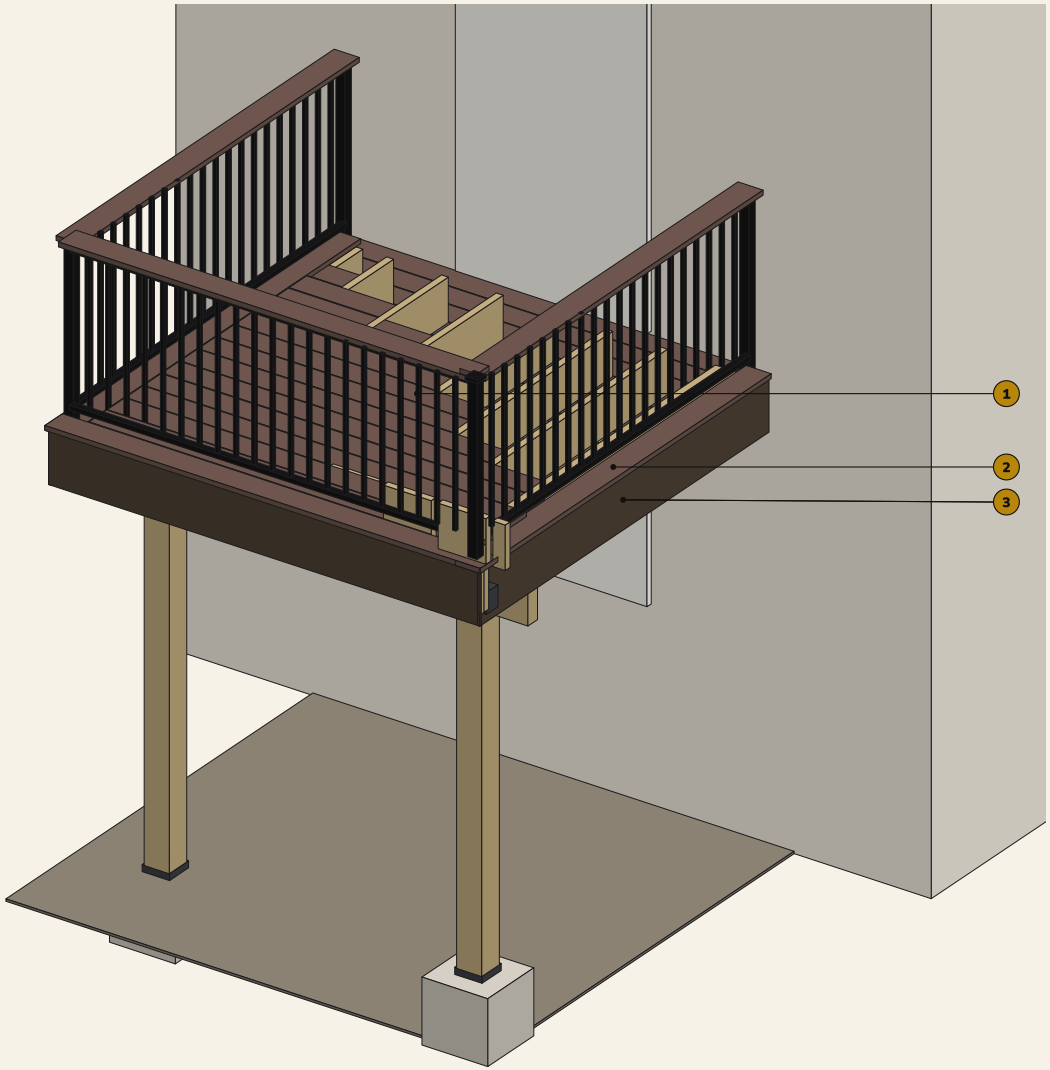

KEY

1. TimberTech Vintage English Walnut field decking, hidden fasteners
2. Picture frame + breaker boards — TimberTech Vintage English Walnut
3. HardieTrim skirt

House shown for context only (the deck work only). The frame under the decking is called out on S-102 and A-003.

Axonometric · not to scale · the model the plans are drawn from

Design intent per 2021 IRC R507 prescriptive. Field verify. Do not scale.

Deck 2 — 8' x 8' · A-003 · Isometric — exploded, labeled


A-003

ISOMETRIC — EXPLODED, LABELED

Each build layer lifted in order: piers · posts · beams · frame · decking · rail

Deck 2 — 8 x 8 · 1675 Summit Point Ct, Colorado Springs

GSX · Jade Pender 303-550-9558 · October 22, 2026 · Rev 0 · PERMIT SET

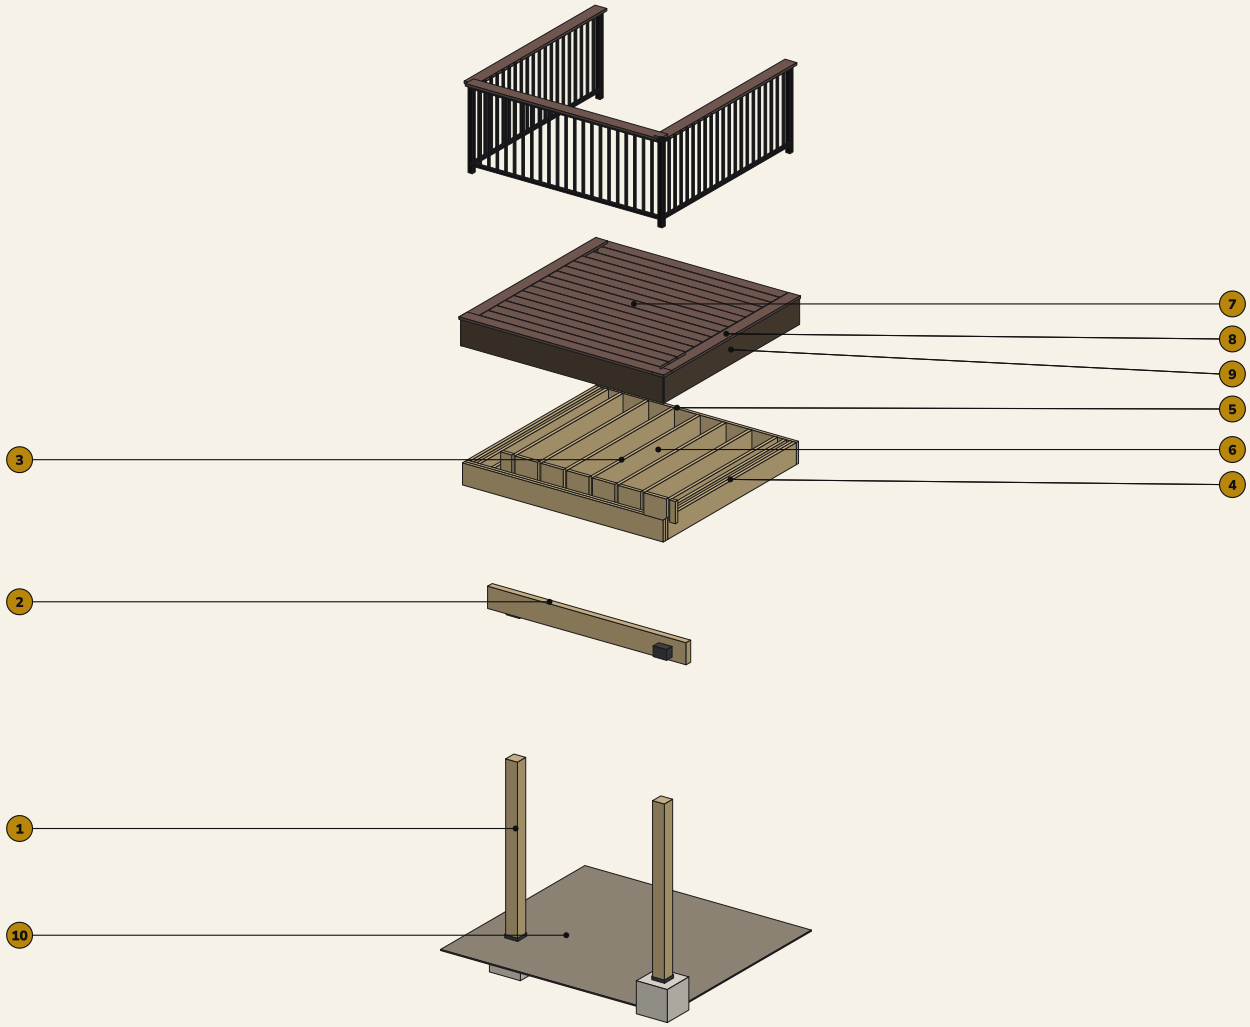

KEY

1. 6x6 post on a ABA66Z standoff base
2. Beam
3. 2x10 joist
4. Rim
5. Ledger
6. Blocking
7. TimberTech Vintage English Walnut field decking, hidden fasteners
8. Picture frame + breaker boards — TimberTech Vintage English Walnut
9. HardieTrim skirt
10. Gravel over 6-mil poly under the decks

Layers lifted in build order. Lifts are for clarity only; every member returns straight down to its place.

Axonometric · not to scale · the model the plans are drawn from

Design intent per 2021 IRC R507 prescriptive. Field verify. Do not scale.

Deck 2 — 8' x 8' · S-100 · Foundation plan


S-100

FOUNDATION PLAN

Footings, posts and beam lines with the footing schedule; beams dashed (below the joists)

Deck 2 — 8 x 8 · 1675 Summit Point Ct, Colorado Springs

GSX · Jade Pender 303-550-9558 · October 22, 2026 · Rev 0 · PERMIT SET

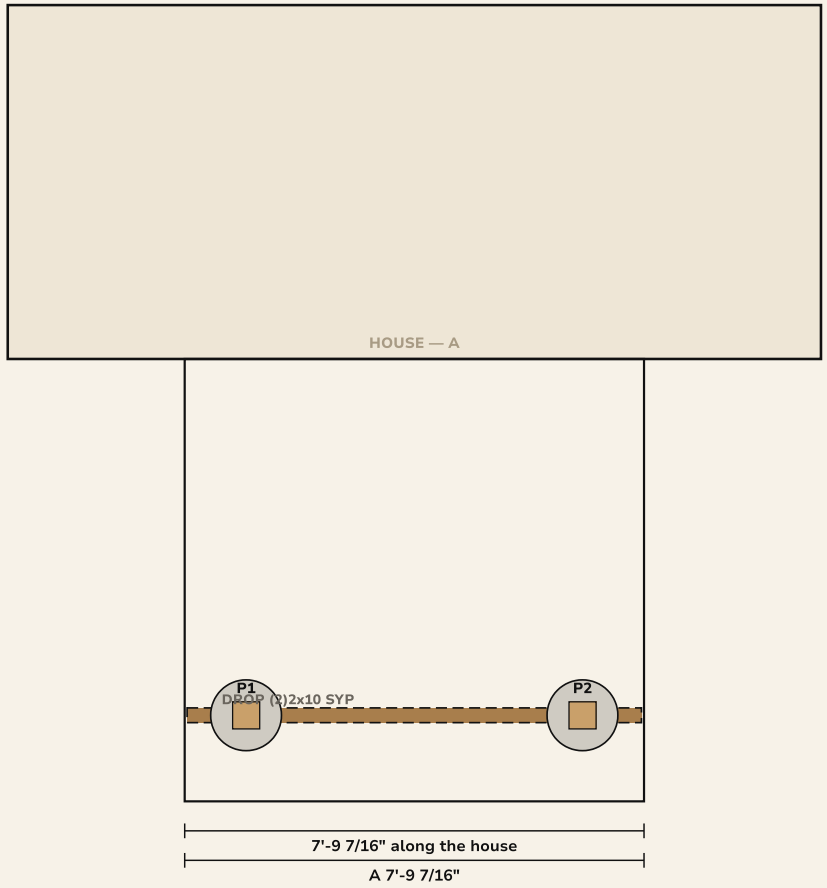

FOOTING SCHEDULE

16" concrete pier x 3'-0", wet-set standoff base

ID	X	Y	ZONE	LOAD
P1	1'-0 1/2"	6'-0 1/2"	A	1,259 lb
P2	6'-8 15/16"	6'-0 1/2"	A	1,259 lb

x from the left frame face facing the house; y from the reference wall.
Frost 2'-6" · soil 1,500 psf · worst post 1,259 lb

Plan · not to scale · house at the top · dimensions govern

Design intent per 2021 IRC R507 prescriptive. Field verify. Do not scale.


Deck 2 — 8' x 8' · S-101 · Framing plan

S-101 **FRAMING PLAN**

Ledger, joists, rims, blocking, beams; every member in the model — the cut list is on T-600

Deck 2 — 8 x 8 · 1675 Summit Point Ct, Colorado Springs

GSX · Jade Pender 303-550-9558 · October 22, 2026 · Rev 0 · PERMIT SET

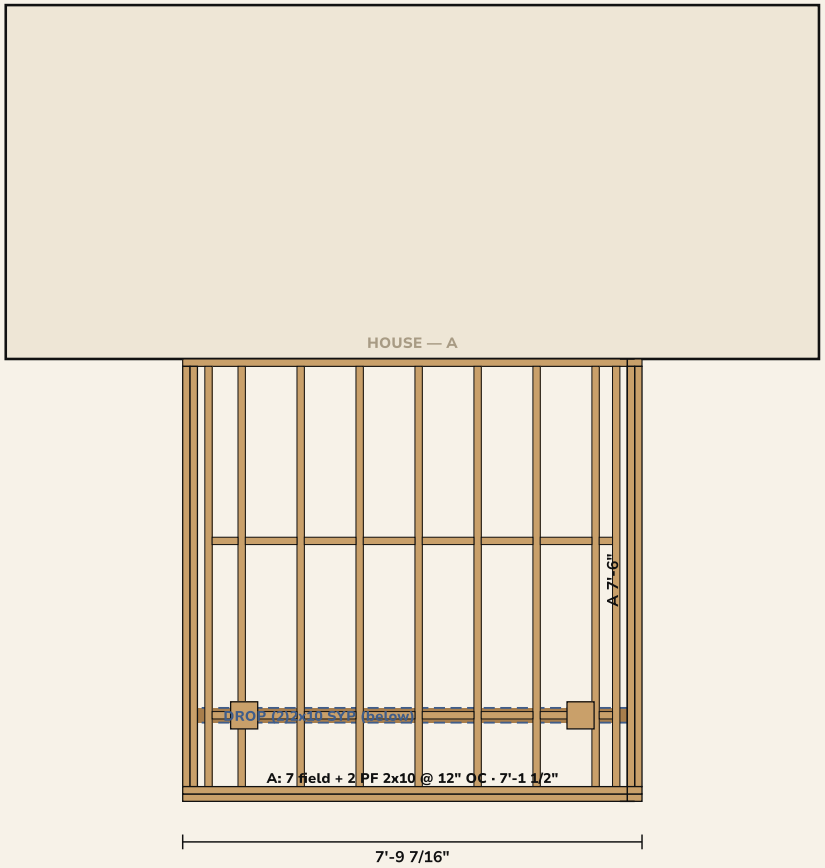

FRAMING NOTES

9 2x10 #1 True Frame Joist SYP GC @ 12" OC x 7'-1 1/2"

2-ply 2x10 front and sides

2x10 ledger x 7'-9 7/16" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end

blocking one row over the beam, staggered

G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)

DROP (2)2x10 SYP: 7'-8 7/16", 2 posts at 1'-0 1/2" / 6'-8 15/16" (worst 1,259 lb)

Connectors:

Simpson LUS28Z face-mount hanger 2x8/2x10: 18

Simpson HUCQ210-2-SDS concealed-flange double 2x10 hanger (SDS screws included): 4

Simpson DTT1Z lateral tie kit w/ SDS screws: 4

Simpson H2.5AZ hurricane tie (joists to the drop beam, hidden): 11

Simpson BC46Z post cap 6x post / 4x beam: 2

7/16" x 4-1/2" HDG hex bolt + nut + 2 washers: 8

Deck 2 — 8' x 8' · S-102 · Structure isometric, labeled


S-102

STRUCTURE ISOMETRIC — FRAME, LABELED

Piers, post bases, posts, post caps, beam, joists, double rims, ledger, blocking

Deck 2 — 8 x 8 · 1675 Summit Point Ct, Colorado Springs

GSX · Jade Pender 303-550-9558 · October 22, 2026 · Rev 0 · PERMIT SET

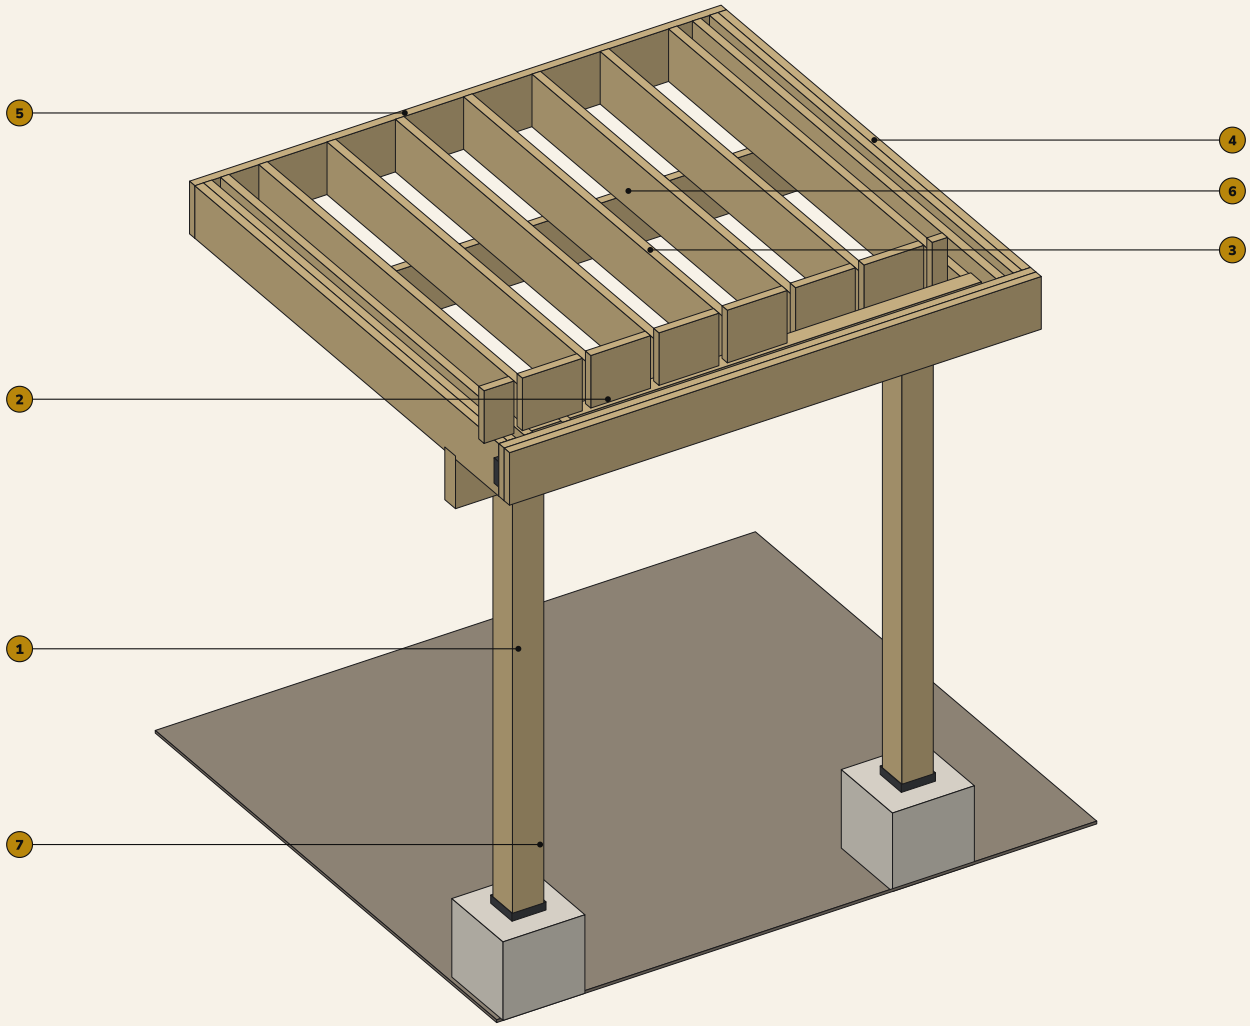

KEY

1. 6x6 post on a ABA66Z standoff base
2. Beam
3. 2x10 joist
4. Rim
5. Ledger
6. Blocking
7. Gravel over 6-mil poly under the decks

Decking, rail and house removed to show the frame. Joists hang from the ledger in face-mount hangers, bear on the drop beam with H2.5AZ ties; double rims in concealed-flange hangers.

Axonometric · not to scale · the model the plans are drawn from

Design intent per 2021 IRC R507 prescriptive. Field verify. Do not scale.

Deck 2 — 8' x 8' · A-101 · Decking plan


A-101

DECKING PLAN

Every board, border and divider as it lays; rail posts shown for the pockets

Deck 2 — 8 x 8 · 1675 Summit Point Ct, Colorado Springs

GSX · Jade Pender 303-550-9558 · October 22, 2026 · Rev 0 · PERMIT SET

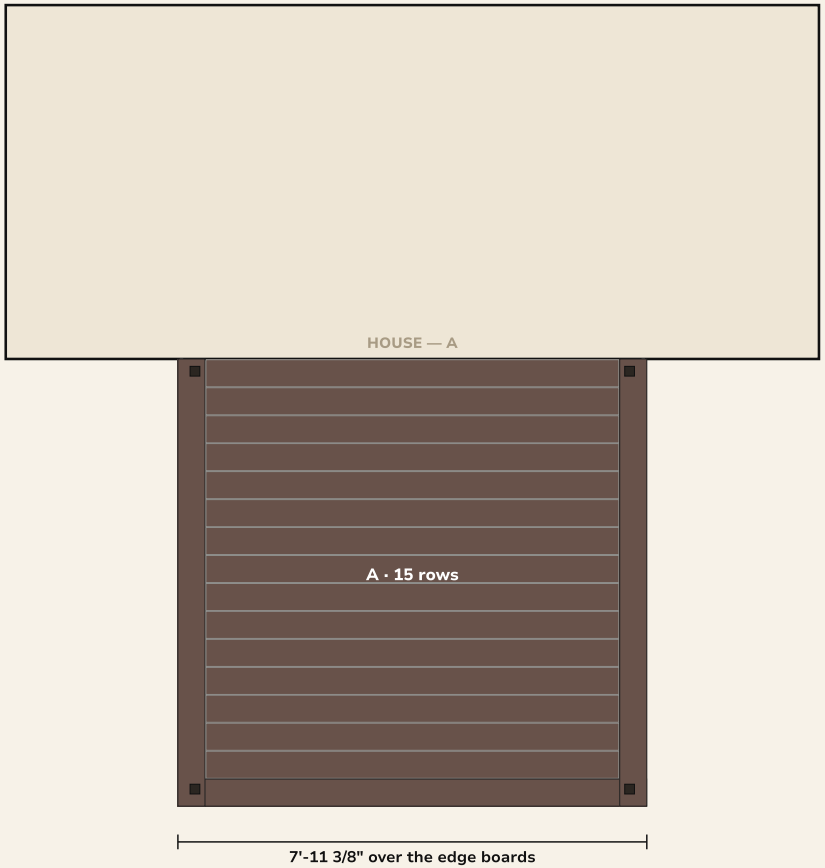

DECKING

Field: TimberTech Vintage English Walnut, 5.5" x 1", 3/16" gaps

Border: Vintage English Walnut

Boards run parallel to the house; edge overhang 1" over the fascia

Cortex face screws with color-matched plugs: 2 per board at every joist and at both ends of every run, color-matched plugs (274 field + 50 border/divider)

Rows per zone: A 15 (no rips)

Plan · not to scale · house at the top · dimensions govern

Design intent per 2021 IRC R507 prescriptive. Field verify. Do not scale.

Deck 2 — 8' x 8' · A-201 · Railing plan + elevation


A-201

RAILING PLAN + ELEVATION

Post IDs and types (E end · L line · C corner), bay lengths, outer-edge elevation

Deck 2 — 8 x 8 · 1675 Summit Point Ct, Colorado Springs

GSX · Jade Pender 303-550-9558 · October 22, 2026 · Rev 0 · PERMIT SET

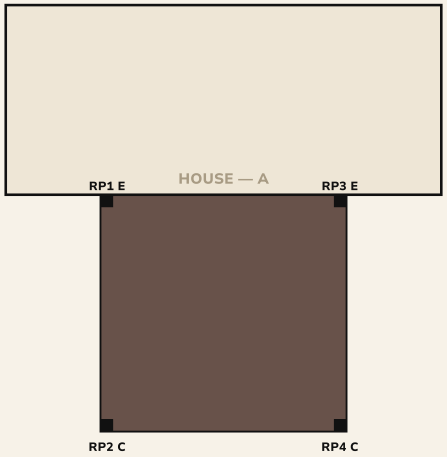


RAILING

Cinch 36" Satin Black: 3 bays, 4 posts, 23 LF + drink rail

Cinch 36" — 4 posts (2 CORNER, 2 END) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post; drink rail board on Cinch drink-rail brackets, mitred at every turn

Bays: left 7'-1" · right 7'-1" · front 7'-4 7/16"

Guard 36" min above the deck; openings under 4" (IRC R312). Rail LF for labor = deck-edge LF of actual rail.

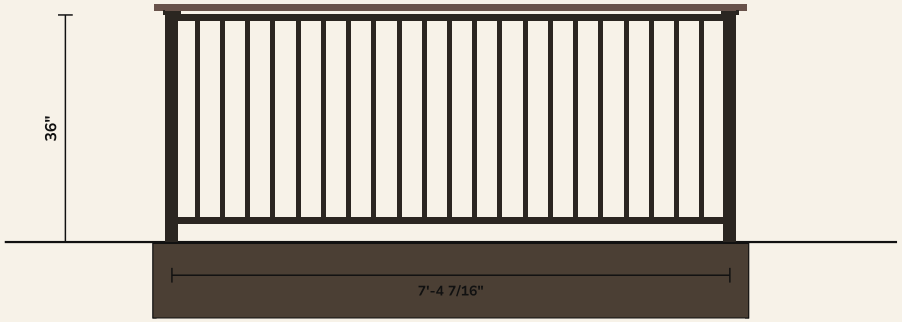

Plan above · elevation of the outer edge below

Design intent per 2021 IRC R507 prescriptive. Field verify. Do not scale.

Deck 2 — 8' x 8' · A-202 · Elevations


A-202 **ELEVATIONS**

Front from the yard and both ends, drawn from the model — deck and roof-cover heights


Deck 2 — 8 x 8 · 1675 Summit Point Ct, Colorado Springs

GSX · Jade Pender 303-550-9558 · October 22, 2026 · Rev 0 · PERMIT SET

FRONT ELEVATION — from the yard

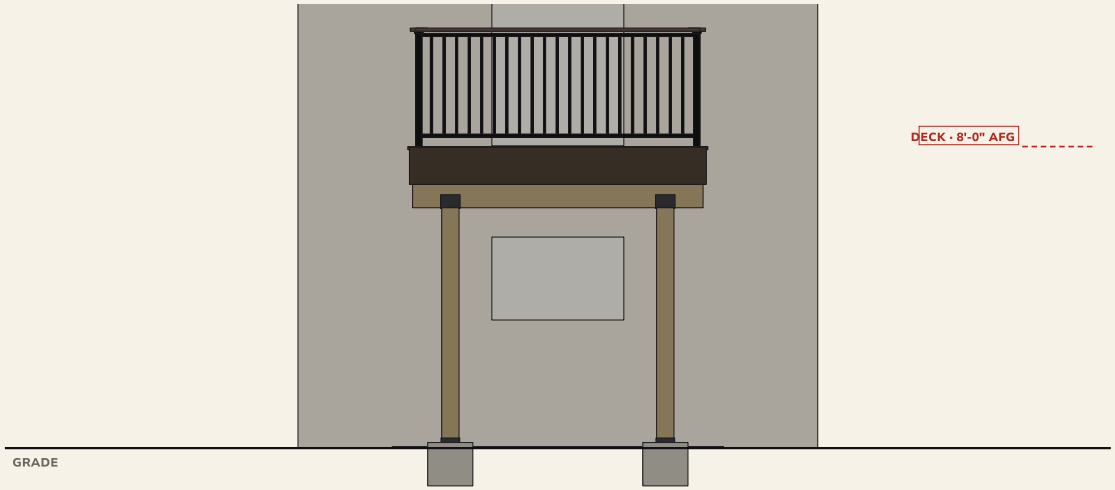


RIGHT END ELEVATION

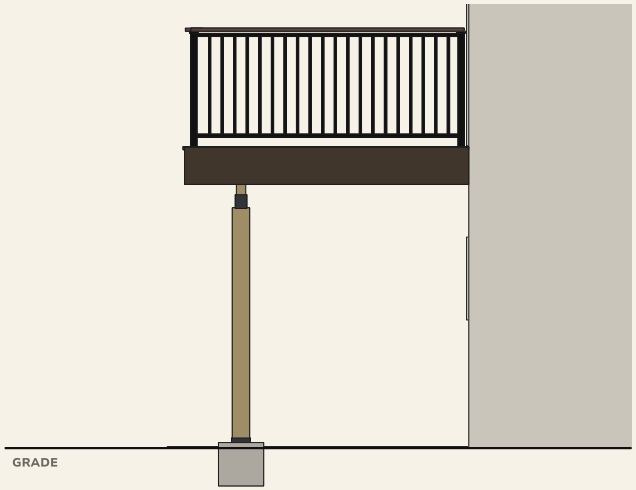

NOTES

· Deck surface 8'-0" above grade
· Heights AFG = above finished grade at the beam line; field-verify grade before setting the piers
· Deck frame: 2x10 #1 True Frame GC @ 12" OC on a (2)2x10 SYP drop beam, 2 posts
· Guard 36" min. on every open side — the surface is 8'-0" above grade (IRC R312.1)

LEFT END ELEVATION

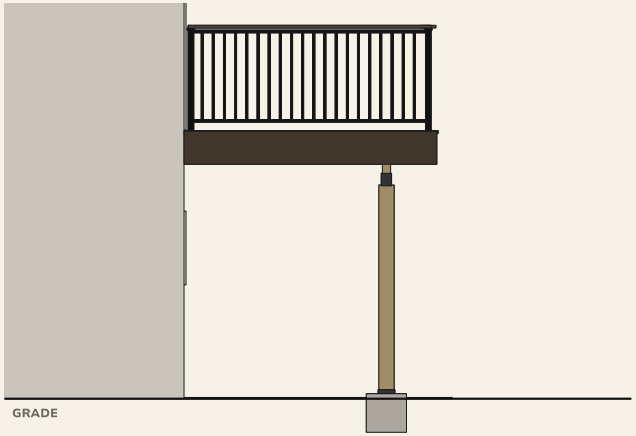

Elevations · orthographic · not to scale · heights govern

Design intent per 2021 IRC R507 prescriptive. Field verify. Do not scale.

Deck 2 — 8' x 8' · A-301 · Section + front elevation


A-301 **SECTION + FRONT ELEVATION**

Cut through the deepest zone; heights to grade, frost line, cantilever, guard


Deck 2 — 8 x 8 · 1675 Summit Point Ct, Colorado Springs

GSX · Jade Pender 303-550-9558 · October 22, 2026 · Rev 0 · PERMIT SET

SECTION through zone A at 3'-10 3/4" — looking toward the left end

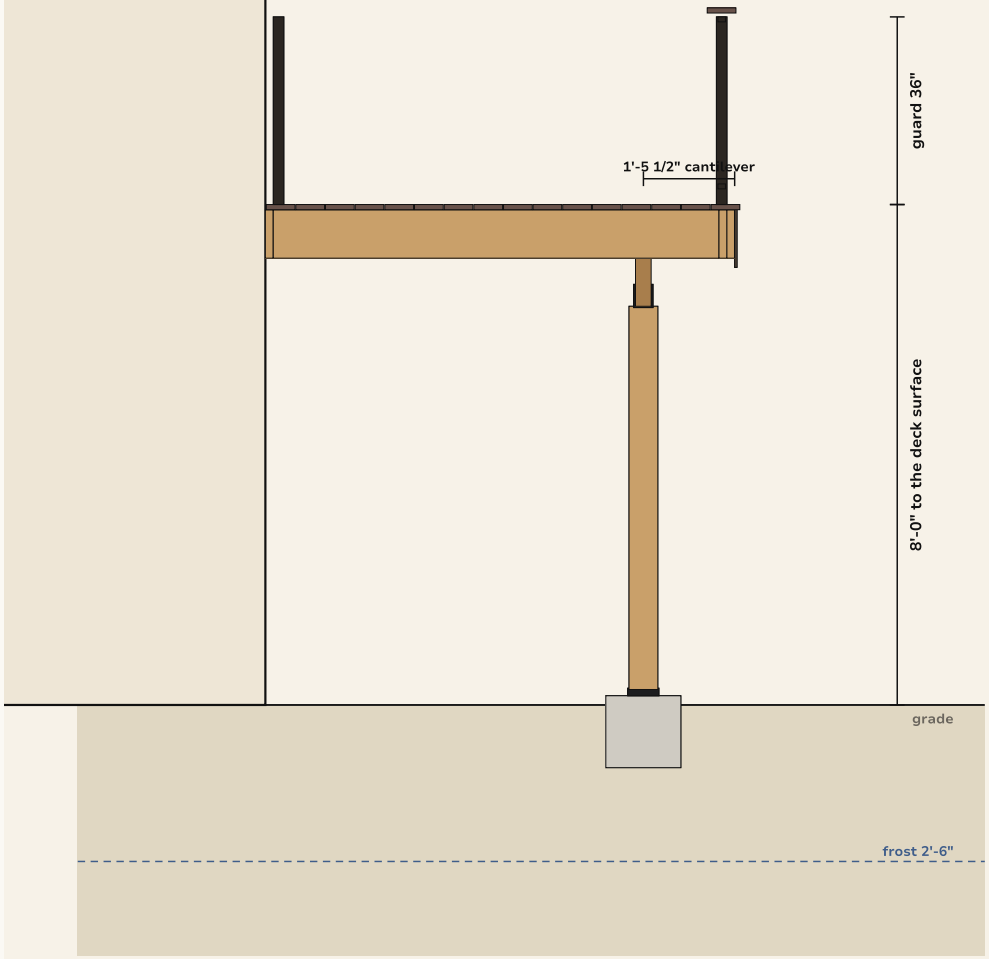

FRONT ELEVATION — from the yard

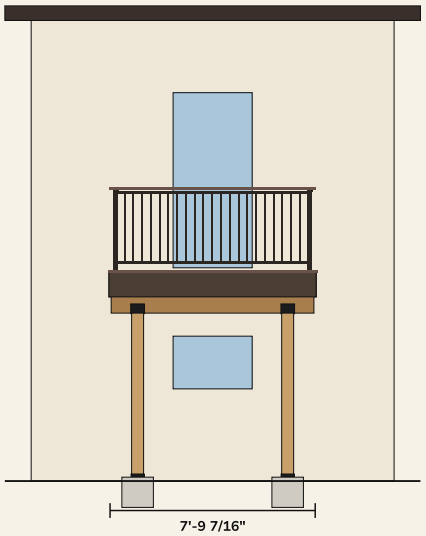

SECTION NOTES

Deck surface 8'-0" above grade; guard 36" where the drop exceeds 30"

DROP (2)2x10 SYP: 7'-8 7/16", 2 posts at 1'-0 1/2" / 6'-8 15/16" (worst 1,259 lb)

Posts 2 x 6x6 on 16" concrete piers 3'-0" deep

2x10 ledger x 7'-9 7/16" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 9 fasteners

G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)

Section left · elevation right · not to a common scale

Design intent per 2021 IRC R507 prescriptive. Field verify. Do not scale.

Deck 2 — 8' x 8' · D-501 · Details


D-501 **DETAILS**

Ledger · post / beam / cap · footing · rail post · deck edge · the job's special condition

Deck 2 — 8 x 8 · 1675 Summit Point Ct, Colorado Springs


GSX · Jade Pender 303-550-9558 · October 22, 2026 · Rev 0 · PERMIT SET

1 LEDGER AT THE HOUSE

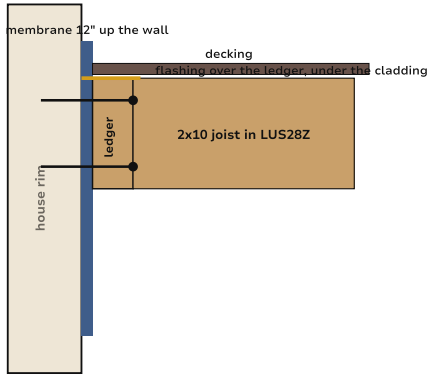


2x10 ledger x 7'-9 7/16" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 9 fasteners · 26 ga wall flashing (WUI)

2 POST · BEAM · CAP

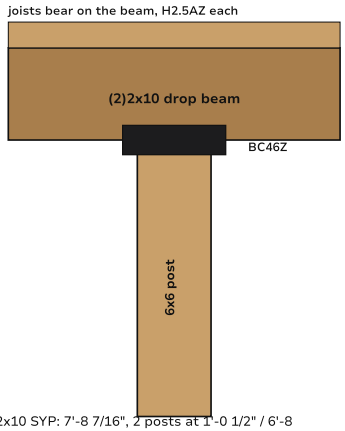


DROP (2)2x10 SYP: 7'-8 7/16", 2 posts at 1'-0 1/2" / 6'-8 15/16" (worst 1,259 lb)

3 FOOTING · POST BASE

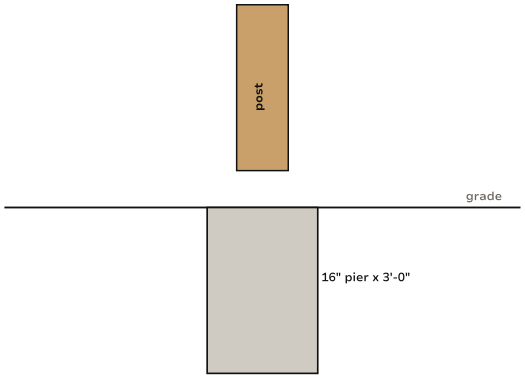


4 RAIL POST · GUARD

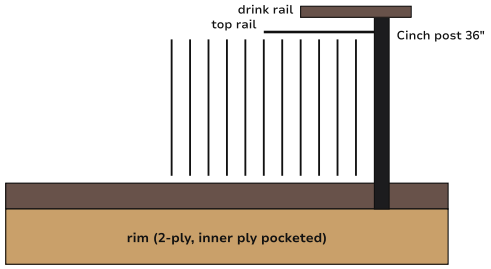

Cinch 36" — 4 posts (2 CORNER, 2 END) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post; drink rail board on Cinch drink-rail brackets, mitred at every turn

5 DECK EDGE · BORDER

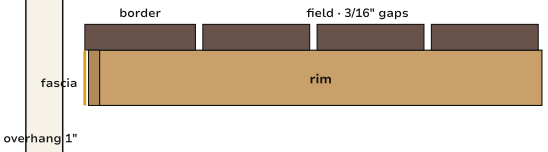

Cortex face screws with color-matched plugs: 2 per board at every joist and at both ends of every run, color-matched plugs (274 field + 50 border/divider)

6 BLOCKING

Blocking one row over the beam, staggered up and down so every block can be end-nailed.

Schematic details, not to scale

Design intent per 2021 IRC R507 prescriptive. Field verify. Do not scale.

Deck 2 — 8' x 8' · D-502 · Connection details — frame

D-502


CONNECTION DETAILS — FRAME

Ledger · hangers · joists on the beam · (2)2x10 on the cap · pier + base · knee braces


Deck 2 — 8 x 8 · 1675 Summit Point Ct, Colorado Springs

GSX · Jade Pender 303-550-9558 · October 22, 2026 · Rev 0 · PERMIT SET


1 LEDGER AT THE HOUSE — SECTION

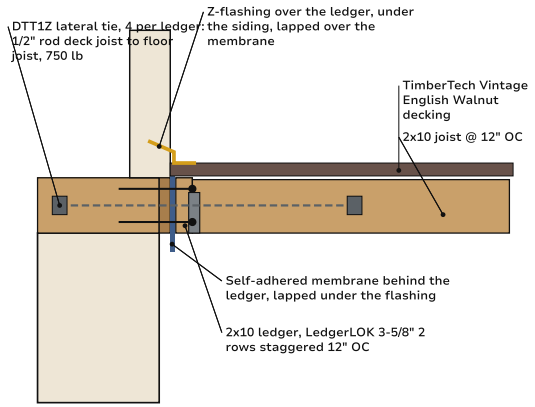

2 HANGERS — PLAN AT THE LEDGER + SIDE RIM

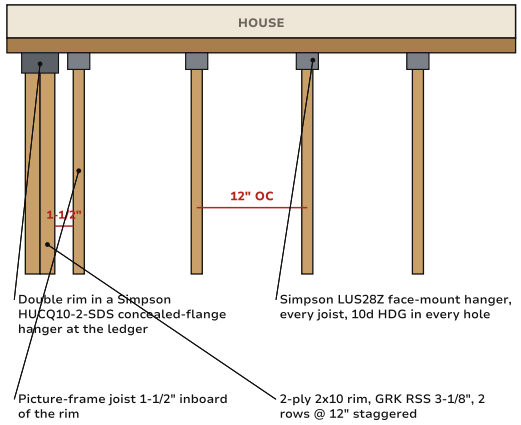


3 JOISTS ON THE DROP BEAM — SECTION

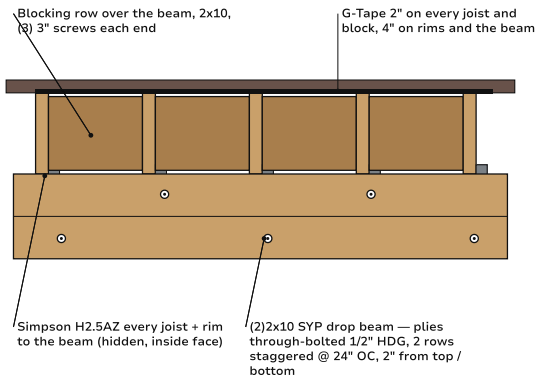


Joists bear the full beam width

Cantilever 1'-5 1/2" past the beam — over L/4: engineer

4 (2)2x10 BEAM ON THE 6x6 — ELEVATION

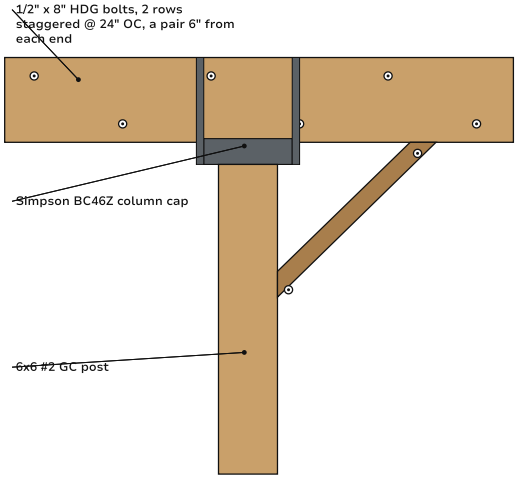

5 POST BASE ON THE DIAMOND PIER — SECTION

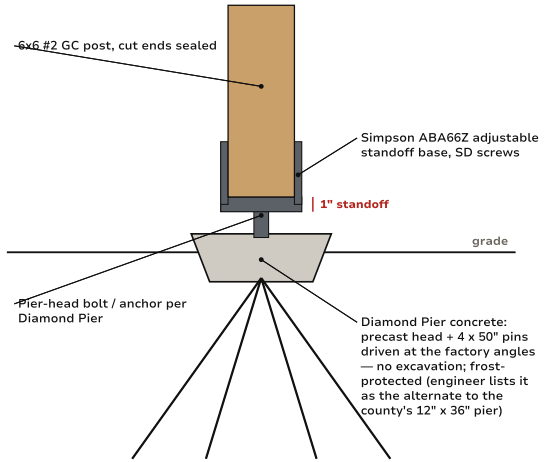

6 POST HEIGHT

Deck 2 — 8' x 8' · D-504 · Connection details — deck edge, rail, lateral

D-504


CONNECTION DETAILS — DECK EDGE, RAIL, LATERAL

Rail post mounting · picture frame + fascia · guard bay · DTT1Z lateral ties · joist tape · fastening schedule


Deck 2 — 8 x 8 · 1675 Summit Point Ct, Colorado Springs

GSX · Jade Pender 303-550-9558 · October 22, 2026 · Rev 0 · PERMIT SET


1 RAIL POST AT THE RIM

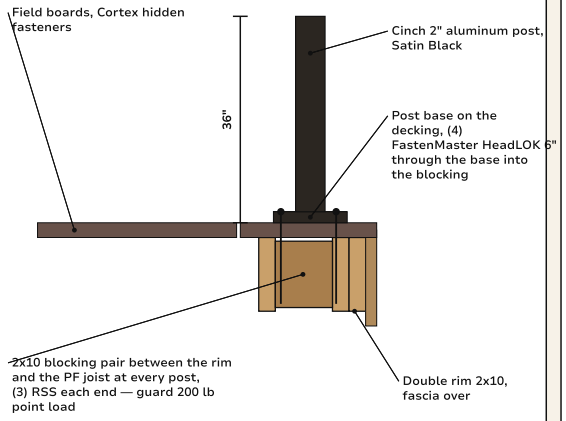

2 DECK EDGE — PICTURE FRAME + FASCIA

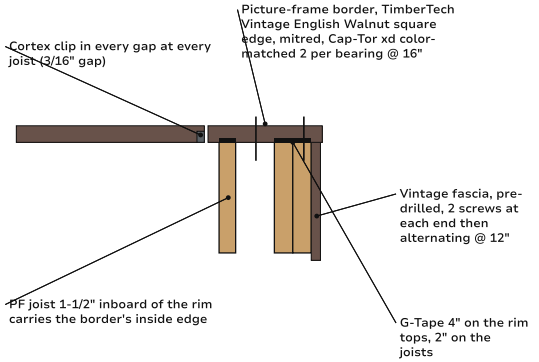


3 GUARD — ONE BAY, ELEVATION

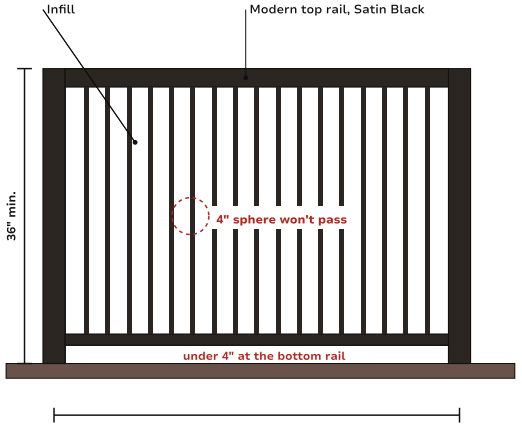


Guard: 200 lb point load at the top, 50 lb on 1 SF of infill (IRC Table R301.5) — submit the rail code report

4 LATERAL LOAD — DTT1Z TIES (PLAN)

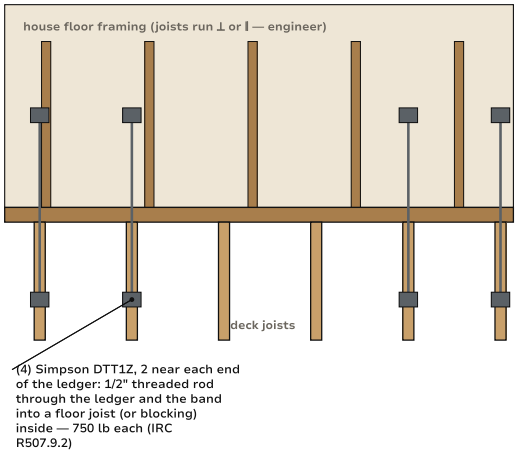

5 JOIST TAPE + BLOCKING

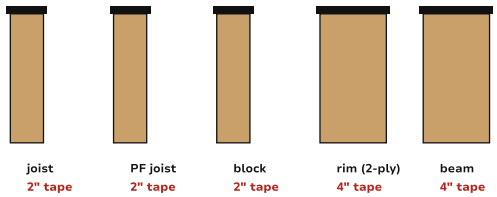

Nichigo G-Tape 3035 (black) on every top edge before decking, lapped over the ends and down the sides 1/2"; one row of 2x10 blocking over the beam, (3) structural screws each

6 FASTENING SCHEDULE

Ledger to house	LedgerLOK 3-5/8", 2 rows staggered 12" OC
Lateral	(4) DTT1Z, 1/2" rod into the floor framing
Joist to ledger	LUS28Z, 10d HDG every hole
Rim to ledger	HUCQ10-2-SDS, SDS screws
Rim plies	GRK RSS 3-1/8", 2 rows @ 12" staggered
Joist to beam	H2.5AZ each joist + rim, 10d x 1-1/2"
Beam plies	1/2" x 8" HDG bolts, 2 rows staggered @ 24"
Beam to post	BC46Z cap, SDS screws
Post to pier	ABA66Z on the Diamond Pier, SD screws
Blocking	(3) structural screws each end
Field boards	Cortex, every joist, every gap
Borders / fascia	Cap-Tor xd color-matched, pre-drilled
Rail posts	(2) 7/16" bolts per post

Deck 2 — 8' x 8'



From the yard




From the front corner




Isometric



Isometric — opposite corner

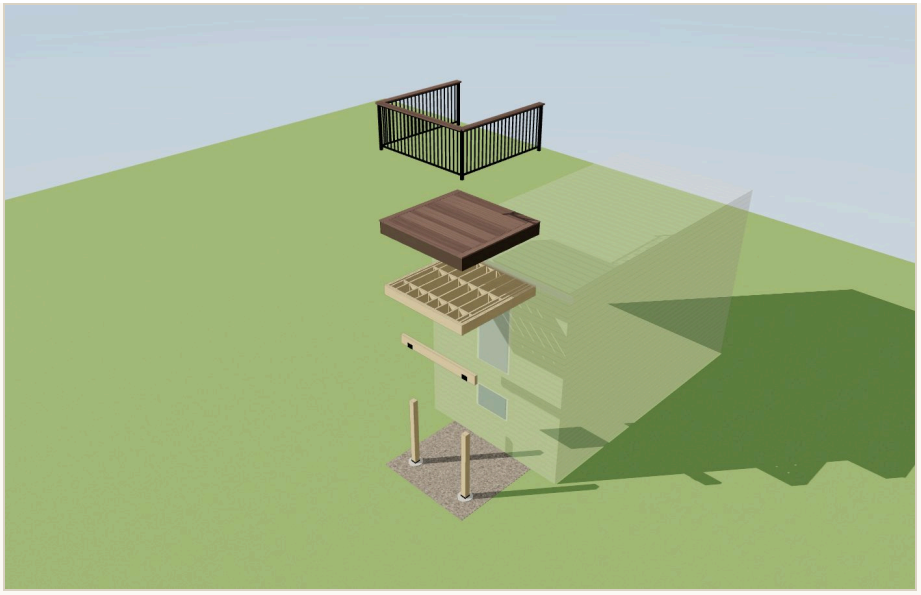

Exploded — every layer

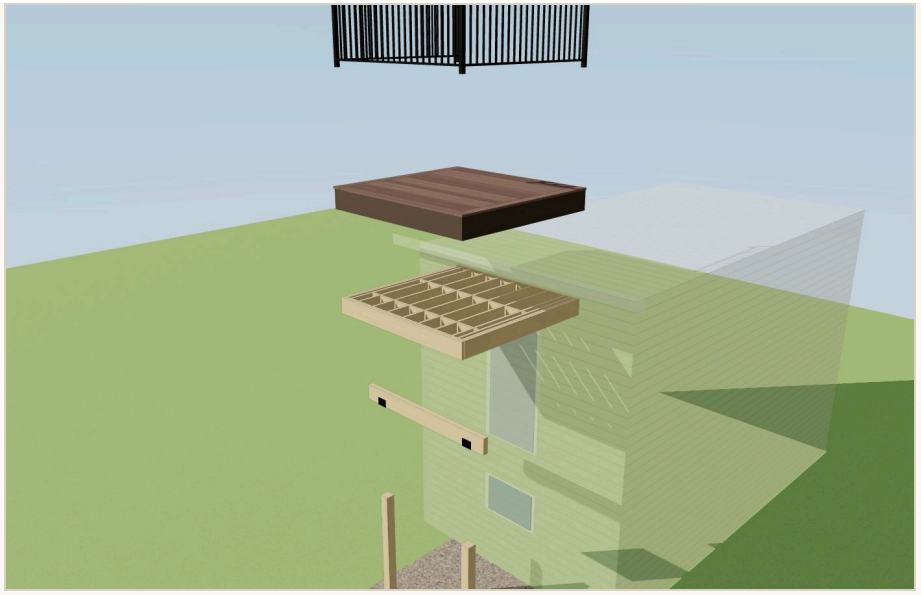


Exploded — from the corner



Structure from below



Under the deck

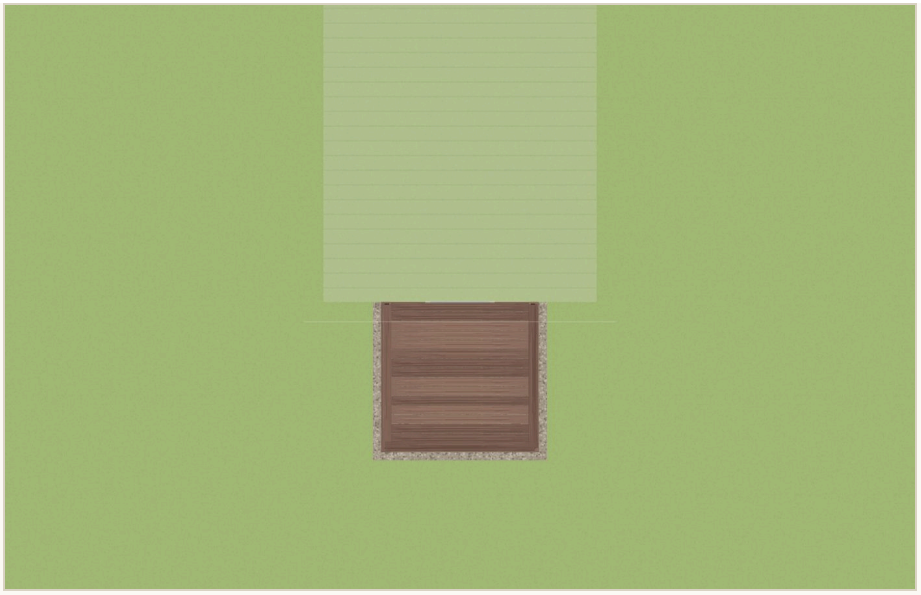

Plan view from above