GS EXTERIOR EXPERTS · DECK DIVISION · TAKEOFF + BUILD SET

281 S Jefferson Ave · Decks + Roof Covers · Louisville

281 S Jefferson Ave, Louisville · two decks (12' x 12' + 14'8" x 3'8" walkway) on CEMCO steel and Diamond Piers · TimberTech Landmark American Walnut, picture frame + dividers, no butt joints · two lean-to covers, black standing seam, Hardie soffit / fascia / rakes · blinds kept

CHECK OR ACH	FINANCED	MONTHLY	SQUARE FEET	FOOTINGS	RAIL
$56,589	**$60,848**	**$706**	**197.8**	**15**	**0 LF**

DESIGN READS

Frame	2 zones, 26'-8" along the house, 12'-0" at the deepest
Deck	50.7 LF of outer edge · 197.8 SF · 1'-3" above grade
Zone	W Walkway — 14'8" x 3'8" under the small cover: 14'-8" x 3'-8"
Zone	M Main deck — 12' x 12' under the main cover: 12'-0" x 12'-0"
Joists	7-1/4" CEMCO cold-formed steel C-joists, 16 ga G90, @ 12" OC
Rims	single-ply 7-1/4" steel track rims and ledger track on a steel angle
Beam	FLUSH boxed 7-1/4" steel C W: 14'-2", 4 posts at 7 3/16" / 3'-0" / 8'-4" / 14'-1 3/16" (worst 474 lb)
Beam	FLUSH boxed 7-1/4" steel C M: 11'-6", 3 posts at 15'-2" / 20'-8" / 26'-2" (worst 1,616 lb)
Posts	2 x 3x3 galvanized steel post stubs + 5 cover posts carrying the deck beam on DP-50/50
Load	50 psf (40 psf live governs) · engineered
Decking	TimberTech Landmark American Walnut — 25 rows parallel to the house, picture frame & dividers in Landmark American Walnut, 3/16" gaps, CONCEALoc
Rail	none
Stair	front:M: 2 risers @ 7.50", 1 treads, 6 stringers, 5'-0" wide

- Rows per panel: panel 1 (0"–14'-8") 7 rows · panel 2 (14'-8"–26'-8") 25 rows · 2 ripped pieces · 1 breaker
- FLUSH (2)2x8 SYP W: 14'-2" long, 4 posts at 7 3/16" / 3'-0" / 8'-4" / 14'-1 3/16"
- FLUSH (2)2x8 SYP M: 11'-6" long, 3 posts at 15'-2" / 20'-8" / 26'-2"
- front flush beam IS the front rim — joists hang into it, posts under it, no separate rim plies

- Frame is CEMCO cold-formed steel: the layout is sized as the equivalent-depth lumber, then the engineer of record designs the members (gauge, beam build-up, clip schedule). Steel prices are estimates until the CEMCO dealer quotes.

SITE & CODE FLAGS internal

ENGINEER	WIND	basic wind speed 145 mph — uplift on the frame and rail loads; engineered connections (H2.5A at every joist, post-to-beam uplift caps) ASCE 7
ENGINEER	FOOTING	Main cover: cover post + deck beam share a Diamond Pier — worst ~1,702 lb roof (ground snow 30 + 15 psf dead) + 1,616 lb deck = ~3,317 lb vs 3,300 lb DP-50/50 — priced as DP-75/63 (6,000 lb) at those posts; uplift at 145 mph — engineer confirms the pier and the post-to-pier hold-down IBC App. I / ASCE 7
ENGINEER	SNOW	Main cover: a lean-to under the house eave takes sliding snow off the house roof and drift against the wall — ASCE 7 sliding + drift surcharge on the cover ASCE 7-22 7.7 / 7.9
ENGINEER	SNOW	Walkway cover: a lean-to under the house eave takes sliding snow off the house roof and drift against the wall — ASCE 7 sliding + drift surcharge on the cover ASCE 7-22 7.7 / 7.9
ENGINEER	ENGINEERING	CEMCO cold-formed steel frame: no prescriptive deck span table in the IRC for CFS — the engineer of record designs joists, beams, clips and the ledger connection (AISI S240 / S100); member sizes here are the same-depth lumber layout IRC R507 / AISI S240
CODE	SNOW	standing seam roof over the deck — metal sheds its snow load onto the deck and the stair below: snow retention bar the full low eave (S-5! ColorGard or equal, seam clamps, no penetrations), sized for the ground snow ASCE 7 Ch. 7 / manufacturer
CODE	ENGINEERING	Louisville amends IRC R507.1: decks supported from the house are engineered unless 30" or less above grade — the decks are under 30", but the covers (IBC App. I patio covers) and the steel frame need the stamped set; the handout asks for every sheet scaled and stamped LMC 15.05.140 / IRC R507.1 amd.
CODE	FIRE	Louisville submittal: decking spec sheet showing ASTM E84 Class A (flame spread 25 or less) — TimberTech Landmark is listed Class A; include the TimberTech Class A data sheet Louisville deck handout / Fire Hardening Code
CODE	SITE	under-deck ground: gravel over 6-mil poly (or concrete) where the deck is 6' or less above grade — included under both decks Louisville deck handout
CHECK	FOOTING	Diamond Pier: pins 50" — locate utilities (811) before driving; bearing 474 lb/post vs 3,300 lb allowable (manufacturer chart, confirm)
CHECK	LEDGER	verify the rim board behind the ledger is solid 2x/LVL/engineered rim (not I-joist web or a hollow band) before the ledger fasteners go in IRC R507.9.1.1

CHECK	ROOF	Main cover: low-slope metal (0.72:12) — the panel maker's low-slope details (seam sealant, field seaming, no end laps) and warranty; confirm with the metal supplier
CHECK	FOOTING	Walkway cover: cover post + deck beam share a Diamond Pier — worst ~435 lb roof (ground snow 30 + 15 psf dead) + 474 lb deck = ~909 lb vs 3,300 lb DP-50/50; uplift at 145 mph — engineer confirms the pier and the post-to-pier hold-down IBC App. I / ASCE 7
CHECK	PRODUCT	TimberTech Landmark hidden fasteners and picture-frame screws into steel: use the maker's steel-frame screw (self-drilling, for 14–18 ga) — confirm the fastener and that the decking warranty covers steel framing
CHECK	PRODUCT	steel frame prices are estimates (no CEMCO dealer quote yet) — get the take-off quoted by the CEMCO dealer before the contract is signed
CHECK	GEOMETRY	lowest point: 9" surface to grade leaves 0.75" under the 7.25" frame — dig out / regrade to 2" min. clear (and away from the house) under that section, or drop to 6" joists there TimberTech / ventilation
CHECK	SETBACK	Dutch Creek PUD (approved 12/15/1981, underlying R-L): the PUD final plan governs setbacks and coverage (LMC 17.28.230) and was not retrievable online. Plain R-L would need 25' rear — the existing house itself sits ~24' from the rear line, and the new main cover's roof edge ~11'-10". Confirm the PUD setbacks with Planning (303-335-4592, Planning@louisvilleco.gov) before submitting; a variance or PUD amendment is outside this scope LMC 17.12.040 / 17.28.230 / Louisville deck handout
CHECK	SETBACK	lot coverage: covered decks count to the support posts. Lot 4,678 SF; house + garage 1,320 SF (assessor). The 2024 aerial puts the existing main cover's roof edge ~11'-4" off the wall; the new cover (posts at 11'-9", 1' overhang) reaches ~12'-9" — about +17 SF of coverage (31.3% to 31.6%; R-L max 30%, the PUD governs). If Planning holds coverage to the existing, set the new posts on the existing post line (field-measure) and let the deck run past the cover Louisville deck handout / LMC 17.12.040
CHECK	SETBACK	work within 3' of a setback may need an Improvement Location Certificate (ILC) — budget a surveyor if Planning asks Louisville deck handout
CHECK	SITE	811 locate before the piers; flood zone X (minimal) Colorado 811 / FEMA
CHECK	FOOTING	Diamond Piers under the cover posts: the city's patio-cover guide asks for footings below the 36" frost line and 8" min. piers — submit the Diamond Pier evaluation report as the frost-protected alternate and get it accepted at plan review Louisville patio-cover guide / IRC R403.1.4 alternate
INFO	SNOW	standing seam on a low-slope shed (~1:12 to 2:12): mechanically seamed or snap-lock rated for the pitch, high-temp self-adhered underlayment under every panel, headwall flashing counterflashed into the house wall
INFO	LEDGER	lateral: 4 x DTT1Z (750 lb each) into house floor framing IRC R507.9.2

INFO	STAIRS	front:M stair: 2 risers @ 7.50" · 1 treads @ 11.66" · run 11 11/16" · stringers 6 @ 12" OC (composite treads) IRC R311.7.5 / TimberTech
INFO	ROOF	Main cover: 0.72:12 pitch — mechanically seamed (double-lock) panels, rated to 1/2:12 by most makers; high-temp self-adhered underlayment over the whole deck, panels one piece eave to headwall
INFO	ROOF	Walkway cover: 1.46:12 pitch — mechanically seamed (double-lock) panels, rated to 1/2:12 by most makers; high-temp self-adhered underlayment over the whole deck, panels one piece eave to headwall
INFO	SETBACK	decks 30" or less above grade are not held to the principal-structure setbacks (Louisville deck handout); both decks are ~15" Louisville deck handout (7/7/2025)
INFO	SNOW	design criteria (Louisville 2024 codes): 145 mph Vult, Exposure C, SDC B (SDS 0.17), frost 36", elev. 5,337', CZ 5B; snow per the ASCE hazard tool (city's Marshall Fire sheet: 30 psf non-reducible; Boulder County layer shows 40 psf) — engineer to confirm the site value 2024 IRC/IBC as adopted, Ord. 1907-2025

THE ORDER Decks & Docks · GSEXT1 · ship to the job

Lumber

NET	ORDER	UNIT	ITEM	WHY
347	**364**	LF	CEMCO 7-1/4" steel C-joist, 16 ga (54 mil) G90 — joists, PF joists, blocking	+5% (cut to length by the supplier where possible) — 12" OC
77	**82**	LF	CEMCO 7-1/4" steel track, 16 ga G90 — rims (single ply, caps the joist ends) + ledger track	+5% (51 LF rim + 27 LF ledger)
27	**30**	LF	Steel ledger angle 3" x 3" 14 ga G90 — joist seats on the ledger track	+10%
51	**54**	LF	CEMCO 7-1/4" steel C, 14 ga (68 mil) G90 — boxed beams (2 C toe-to-toe)	+5% (FLUSH (2)2x8 SYP W 14.2' · FLUSH (2)2x8 SYP M 11.5')
5	**5**	ea	Steel side bracket, 11 ga galvanized — deck beam bolted to the 6x6 cover post (shared pier)	exact (one per shared post, (2) 1/2" thru-bolts + #12 screws into the beam)
2	**2**	ea	Steel post stub 3" x 3" x 11 ga HSS, hot-dip galvanized, cap plate welded — cut to height	exact (one per deck-only pier; 6" clear)
2	**2**	ea	Pier-head post bracket for the Diamond Pier bolt (steel post)	exact

Footings

NET	ORDER	UNIT	ITEM	WHY
7	**7**	ea	Diamond Pier DP-50/50 (head + 4 x 50" pins, plugs, caps)	exact — confirm stock
1	**1**	ea	Stair landing pad (front:M stair) — 4" slab, stringers bear on the pad	exact
1	**1**	ea	Upgrade to Diamond Pier DP-75/63 at the shared main cover posts (roof + deck on one pier)	exact (20'-8": 3,317 lb vs 3,300 lb)

Hardware

NET	ORDER	UNIT	ITEM	WHY
56	**62**	ea	Steel clip angle 1-1/2" x 1-1/2" x 7" 16 ga G90 — joist to track / beam	+6 (2 per joist end where it frames into a beam or ledger)
3	**3**	box	#12-14 x 1" hex-washer self-drilling screw, Climaseal, 500 ct	1463 needed (clips, track, boxed beams, post brackets)
1	**1**	box	Structural screw 1/4" x 3-1/2" through the ledger track into the house rim board (or per the engineer)	40 needed — 2 rows staggered 16" OC
8	**8**	ea	Lateral-load tension tie for steel joists (Simpson DTT2Z w/ steel-joist kit or the engineer's detail) — IRC R507.9.2 equivalent	exact (2 near each end of every ledger)
2	**2**	ea	Cold-galvanizing spray (cut ends, field drilling)	lot

Flashing & waterproofing

NET	ORDER	UNIT	ITEM	WHY
1	**1**	roll	Grace Vycor Deck Protector 12" x 75' (wall membrane behind ledger + side rims)	27 LF of house wall with laps — nothing on a privacy wall
3	**3**	ea	Aluminum L-flashing 10' (over ledger + side rims)	house walls only
1	**1**	roll	6-mil poly sheeting 10' x 100' — under the decks	218 SF with laps
1.3	**1.5**	CY	3/4" washed gravel, 2" over the poly — under the decks (delivered)	218 SF x 2"

Decking

NET	ORDER	UNIT	ITEM	WHY
25	**27**	ea	TimberTech Landmark American Walnut 1x6x12 Grooved	+2 (25 x 12' · 7 x 16' · panel 1 7 rows · panel 2 25 rows · every row one piece)
7	**9**	ea	TimberTech Landmark American Walnut 1x6x16 Grooved	+2 (25 x 12' · 7 x 16' · panel 1 7 rows · panel 2 25 rows · every row one piece)
4	**4**	ea	TimberTech Landmark American Walnut 1x6x16 Square Edge — borders & dividers	exact (border 14'-8",12'-0" 12'-1" · border 26'-8",0" 12'-1" · breaker DW/M 12'-1" · border 14'-8",3'-8" 8'-4 15/16")
1	**2**	ea	TimberTech Landmark American Walnut 1x6x20 Square Edge — borders & dividers	+1 (border 0",3'-8" 14'-9" + border 0",0" 3'-9")

Fasteners

NET	ORDER	UNIT	ITEM	WHY
1	**1**	box	TimberTech CONCEALoc hidden fastener 500 ct (screws incl.)	437 needed · 500 supplied
1	**1**	box	Starborn Cap-Tor xd 2-3/4" Epoxy American Walnut 350 ct	284 screws needed (first row 28 · border 116 · fascia 92 · stairs 48)

Fascia

NET	ORDER	UNIT	ITEM	WHY
5	**6**	ea	Deck skirt — HardieTrim 4/4 x 12 x 12' smooth ColorPlus Arctic White (wraps the double rim, in place of the composite fascia)	+1 (left fascia (W) 3'-8 1/2" · right fascia (W) 3'-8 1/2" · front fascia (W) 12'-0" · front fascia (W) 2'-9" · left fascia (M) 12'-0" · left fascia (M) 1/2" · right fascia (M) 12'-0" · right fascia (M) 1/2" · front fascia (M) 12'-0" · front fascia (M) 1")
1	**1**	box	Color-matched trim screws for HardieTrim, 100 ct (Arctic White)	40 color-matched screws, pre-drilled, 2 per joist line
1	**1**	kit	ColorPlus touch-up kit, Arctic White	cut ends

Stairs

NET	ORDER	UNIT	ITEM	WHY
1	**2**	ea	TimberTech Landmark American Walnut 1x6x12 Square Edge — treads (front:M stair)	+1 (1 treads x 2 boards @ 5'-0", 2 per board)
1	**1**	ea	TimberTech Landmark American Walnut riser board 7-1/4" x 12' (front:M stair)	exact (2 risers @ 5'-0")
2	**2**	ea	Steel stair stringer, galvanized, pre-formed to the riser / tread	exact

Porch cover

NET	ORDER	UNIT	ITEM	WHY
3	**3**	ea	6x6 x 10' Western red cedar post (cover) — Main cover	exact (3 posts on the low beam at 15'-2" / 20'-8" / 26'-2"; 8'-3 1/2" cut length)
2	**2**	ea	2x10x16 #1 SYP — cover beam (2 ply) — Main cover	+0 ((2)2x10 x 12.0' at the posts)
1	**1**	ea	2x10x16 #1 SYP — cover ledger on the house — Main cover	exact
10	**11**	ea	2x8x14 #1 SYP — cover rafters @ 16" OC — Main cover	+1 cull (10 rafters, 13.2' with the overhang)
3	**4**	ea	2x8x16 #1 SYP — cover fascia / sub-fascia — Main cover	+1 (38 LF)
6	**6**	sheet	7/16" OSB roof sheathing 4x8 — Main cover	170 SF + 10% cuts
170	**178**	SF	Standing seam roof — 24 ga steel 16" 1-1/2" mechanically seamed (double-lock, low-slope rated) panels x 13.2' (Black, PVDF), 10 panels — Main cover	10 panels x 13.2' + 5% (one-piece eave to headwall, no end laps) — mechanical seam priced at the snap-lock rate; confirm with the metal supplier
1	**1**	roll	High-temp self-adhered ice & water underlayment, 2 sq roll (under every metal panel) — Main cover	170 SF — full coverage under metal (high-temp)
2	**3**	ea	Standing seam eave / drip trim 10', color-matched — Main cover	12 LF low eave + 1
3	**4**	ea	Standing seam gable / rake trim 10', color-matched — Main cover	two rakes x 13.2' + 1
2	**3**	ea	Headwall (ledger) flashing with Z-closure 10', color-matched — into the house siding / counterflash — Main cover	12 LF at the house — counterflash into the siding / brick
3	**3**	ea	Foam + metal closure strips at eave and headwall, 10' — Main cover	eave + headwall closures
1	**1**	box	Panel clips + pancake-head screws, box of 250 — Main cover	90 clips @ 18" OC on each seam
1	**1**	box	Color-matched #10 woodgrip trim screws w/ washers, 250 — Main cover	trims, closures, snow bar

NET	ORDER	UNIT	ITEM	WHY
3	**3**	ea	Butyl tape / polyurethane sealant, per roll or tube — Main cover	headwall, eave, rake laps
12	**14**	LF	Snow retention — clamp-on bar across the low eave over the deck (Black) — Main cover	12' — metal sheds 30 psf snow onto the deck and stair below; one bar 12-18" above the eave
5	**5**	panel	Porch ceiling — HardieSoffit 4' x 10' cedarmill ColorPlus Arctic White (non-vented; 1 in 3 vented if the roof is closed) — Main cover	170 SF + 10% cuts
3	**3**	lb	Stainless ring-shank siding nails 2", per lb — Main cover	stainless ring-shank, 6" OC at every rafter
4	**5**	ea	Cover fascia + rakes — HardieTrim 4/4 x 7-1/4 x 12' rustic ColorPlus Arctic White over the 2x8 sub-fascia — Main cover	+1 (38 LF: front 12' + two rakes 13.2')
1	**1**	box	Color-matched trim screws for HardieTrim, 100 ct (Timber Bark) — Main cover	color-matched trim screws
3	**3**	ea	Simpson ABA66Z post base on the shared Diamond Pier bolt — cover post (pier counted with the deck) — Main cover	exact
3	**3**	ea	Simpson AC6Z post cap, 6x6 to (2)2x10 beam — Main cover	exact
10	**10**	ea	Simpson H2.5AZ rafter tie — Main cover	one per rafter at the beam
19	**19**	ea	FastenMaster LedgerLOK 6" — cover ledger, 2 rows staggered 16" OC — Main cover	12 LF x 2 rows @ 16"
2	**2**	ea	6x6 x 10' Western red cedar post (cover) — Walkway cover	exact (2 posts on the low beam at 3'-0" / 8'-4"; 8'-9" cut length)
2	**2**	ea	2x10x16 #1 SYP — cover beam (2 ply) — Walkway cover	+0 ((2)2x10 x 6.3' at the posts)
1	**1**	ea	2x10x16 #1 SYP — cover ledger on the house — Walkway cover	exact
5	**6**	ea	2x8x8 #1 SYP — cover rafters @ 16" OC — Walkway cover	+1 cull (5 rafters, 4.9' with the overhang)
2	**3**	ea	2x8x16 #1 SYP — cover fascia / sub-fascia — Walkway cover	+1 (16 LF)
2	**2**	sheet	7/16" OSB roof sheathing 4x8 — Walkway cover	35 SF + 10% cuts
35	**37**	SF	Standing seam roof — 24 ga steel 16" 1-1/2" mechanically seamed (double-lock, low-slope rated) panels x 4.9' (Black, PVDF), 5 panels — Walkway cover	5 panels x 4.9' + 5% (one-piece eave to headwall, no end laps) — mechanical seam priced at the snap-lock rate; confirm with the metal supplier
1	**1**	roll	High-temp self-adhered ice & water underlayment, 2 sq roll (under every metal panel) — Walkway cover	35 SF — full coverage under metal (high-temp)
1	**2**	ea	Standing seam eave / drip trim 10', color-matched — Walkway cover	6 LF low eave + 1
1	**2**	ea	Standing seam gable / rake trim 10', color-matched — Walkway cover	two rakes x 4.9' + 1
1	**2**	ea	Headwall (ledger) flashing with Z-closure 10', color-matched — into the house siding / counterflash — Walkway cover	6 LF at the house — counterflash into the siding / brick
2	**2**	ea	Foam + metal closure strips at eave and headwall, 10' — Walkway cover	eave + headwall closures
1	**1**	box	Panel clips + pancake-head screws, box of 250 — Walkway cover	20 clips @ 18" OC on each seam

NET	ORDER	UNIT	ITEM	WHY
1	**1**	box	Color-matched #10 woodgrip trim screws w/ washers, 250 — Walkway cover	trims, closures, snow bar
3	**3**	ea	Butyl tape / polyurethane sealant, per roll or tube — Walkway cover	headwall, eave, rake laps
6	**8**	LF	Snow retention — clamp-on bar across the low eave over the deck (Black) — Walkway cover	6' — metal sheds 30 psf snow onto the deck and stair below; one bar 12-18" above the eave
1	**1**	panel	Porch ceiling — HardieSoffit 4' x 10' cedarmill ColorPlus Arctic White (non-vented; 1 in 3 vented if the roof is closed) — Walkway cover	35 SF + 10% cuts
1	**1**	lb	Stainless ring-shank siding nails 2", per lb — Walkway cover	stainless ring-shank, 6" OC at every rafter
2	**3**	ea	Cover fascia + rakes — HardieTrim 4/4 x 7-1/4 x 12' rustic ColorPlus Arctic White over the 2x8 sub-fascia — Walkway cover	+1 (16 LF: front 6' + two rakes 4.9')
1	**1**	box	Color-matched trim screws for HardieTrim, 100 ct (Timber Bark) — Walkway cover	color-matched trim screws
2	**2**	ea	Simpson ABA66Z post base on the shared Diamond Pier bolt — cover post (pier counted with the deck) — Walkway cover	exact
2	**2**	ea	Simpson AC6Z post cap, 6x6 to (2)2x10 beam — Walkway cover	exact
5	**5**	ea	Simpson H2.5AZ rafter tie — Walkway cover	one per rafter at the beam
10	**10**	ea	FastenMaster LedgerLOK 6" — cover ledger, 2 rows staggered 16" OC — Walkway cover	6 LF x 2 rows @ 16"

Site

NET	ORDER	UNIT	ITEM	WHY
198	**198**	SF	Demo existing deck + haul-off	labor line — field verify the existing deck

FASTENER & CONNECTOR SCHEDULE

Ledger	7-1/4" steel ledger track + 3x3 ledger angle, 1/4" structural screws 2 rows staggered 16" OC into the rim board (engineer confirms) · flashing and membrane as for wood
Field	CONCEALoc at every joist in every gap (437)
Face screws	Cap-Tor xd color-matched ONLY at: first row 1 per joist on the house edge · borders 2 per bearing point @ 16" · fascia 2 at each board end then alternate top/bottom every 12", pre-drilled · stair treads 2 per stringer per board
Steel frame	7-1/4" C-joists 16 ga @ 12" OC · single-ply track rims · boxed C beams · clip angles with #12 self-drilling screws (4 per leg) · cut ends cold-galvanized · no joist tape needed

▼ Cut list

MEMBER	STOCK	LENGTH	QTY	NOTE
Field joists (W)	7-1/4" C	3'-3 1/2"	13	@ 12" OC, crown up

MEMBER	STOCK	LENGTH	QTY	NOTE
Picture-frame joists (W)	7-1/4" C	3'-3 1/2"	2	centre 5 1/4" from each frame face
Side rim plies (W)	7-1/4" C	3'-3 1/2"	4	2-ply, laminated on the ground with RSS 2 rows @ 12" staggered
Ledger (W)	7-1/4" C	14'-8"	1	top at deck height less board thickness; membrane behind, flashing over
Blocking (W)	7-1/4" C	10 1/2"	14	1 row at 1'-10" from the wall
Field joists (M)	7-1/4" C	11'-7 1/2"	11	@ 12" OC, crown up
Picture-frame joists (M)	7-1/4" C	11'-7 1/2"	2	centre 5 1/4" from each frame face
Divider doublers (M)	7-1/4" C	11'-7 1/2"	1	sister a joist on the divider line so both board edges bear
Side rim plies (M)	7-1/4" C	11'-7 1/2"	4	2-ply, laminated on the ground with RSS 2 rows @ 12" staggered
Ledger (M)	7-1/4" C	12'-0"	1	top at deck height less board thickness; membrane behind, flashing over
Blocking (M)	7-1/4" C	10 1/2"	12	1 row at 6'-0" from the wall
Field boards panel 1	Landmark American Walnut	14'-0"	6	one board wall to border, no joints
Field boards panel 1 (rip)	Landmark American Walnut	14'-0"	1	one board wall to border, no joints; ripped to fit the border / the house
Field boards panel 2	Landmark American Walnut	11'-3"	18	one board wall to border, no joints
Field boards panel 2	Landmark American Walnut	11'-4"	6	one board wall to border, no joints
Field boards panel 2 (rip)	Landmark American Walnut	11'-4"	1	one board wall to border, no joints; ripped to fit the border / the house
Stair stringers (front:M)	steel stringer	2'-7"	6	2 risers @ 7.500" · 1 treads @ 11.66" · stringers 12" OC
FLUSH (2)2x8 SYP W beam	7-1/4" C	14'-2"	2	y 3'-6 1/2"; posts at 7 3/16" / 3'-0" / 8'-4" / 14'-1 3/16"
Posts under FLUSH (2)2x8 SYP W	3x3 HSS	6"	4	field-measure each
FLUSH (2)2x8 SYP M beam	7-1/4" C	11'-6"	2	y 11'-10 1/2"; posts at 15'-2" / 20'-8" / 26'-2"
Posts under FLUSH (2)2x8 SYP M	3x3 HSS	6"	3	field-measure each
Border 26'-8",0"	Landmark American Walnut square	12'-1"	1	mitre at the corners; dividers on the doubled joist
Border 14'-8",12'-0"	Landmark American Walnut square	12'-1"	1	mitre at the corners; dividers on the doubled joist
Border 14'-8",3'-8"	Landmark American Walnut square	8'-4 15/16"	1	mitre at the corners; dividers on the doubled joist
Border 0",3'-8"	Landmark American Walnut square	14'-9"	1	mitre at the corners; dividers on the doubled joist

MEMBER	STOCK	LENGTH	QTY	NOTE
Border 0",0"	Landmark American Walnut square	3'-9"	1	mitre at the corners; dividers on the doubled joist
Breaker dw/m	Landmark American Walnut square	12'-1"	1	mitre at the corners; dividers on the doubled joist
Stair treads (front:M)	Landmark American Walnut square	5'-0"	2	2 boards per tread, nosing 3/4" over the riser
Stair risers (front:M)	riser board	5'-0"	2	rip to 7.50" less tread thickness
Left fascia (w)	fascia	3'-8 1/2"	1	flush under the board nose; full board at the front corners, short piece at the house
Right fascia (w)	fascia	3'-8 1/2"	1	flush under the board nose; full board at the front corners, short piece at the house
Front fascia (w)	fascia	12'-0"	1	flush under the board nose; full board at the front corners, short piece at the house
Front fascia (w)	fascia	2'-9"	1	flush under the board nose; full board at the front corners, short piece at the house
Left fascia (m)	fascia	12'-0"	1	flush under the board nose; full board at the front corners, short piece at the house
Left fascia (m)	fascia	1/2"	1	flush under the board nose; full board at the front corners, short piece at the house
Right fascia (m)	fascia	12'-0"	1	flush under the board nose; full board at the front corners, short piece at the house
Right fascia (m)	fascia	1/2"	1	flush under the board nose; full board at the front corners, short piece at the house
Front fascia (m)	fascia	12'-0"	1	flush under the board nose; full board at the front corners, short piece at the house
Front fascia (m)	fascia	1"	1	flush under the board nose; full board at the front corners, short piece at the house

THE STACK internal

Materials (raw)	$15,071.90
Materials × 1.15	$17,332.68
Sales tax 4.00% on factored materials	$693.31
Labor (rate card)	$14,057.90
Work — carries the margin	$32,083.89
General conditions at cost	$791.20
Cost	$32,875.09
Sell — check or ACH at 42.5% GM	**$56,589** · $286.09/SF
Sell at the 40% floor	$54,264

Financed	**$60,848** · $706/mo at 6.99% × 10 yr
Gross profit	$23,714
Engineering — outside the price, at cost	$1,800–$3,000

Labor

LINE	QTY	UNIT	RATE	EXT
Demolition — existing deck	198	SF	$2.00	$396.00
Diamond Pier install (replaces caisson)	7	pier	$50.00	$350.00
Frame	197.8	SF	$10.00	$1,978.00
Decking & fascia	197.8	SF	$8.00	$1,582.40
Extra beam set	1	set	$200.00	$200.00
Stairs (front:M)	2	riser	$150.00	$300.00
Porch cover (Main cover) — frame, sheath, roof, ceiling	170	SF	$28.00	$4,760.00
Porch cover (Main cover) — set the cover posts on the shared deck piers, bracket the deck beam to them	3	post	$45.00	$135.00
Porch cover (Main cover) — standing seam steel in place of shingles (panels, trims, headwall, snow bar)	170	SF	$6.50	$1,105.00
Porch cover (Main cover) — tear off the existing roof cover and haul	170	SF	$3.00	$510.00
Porch cover (Walkway cover) — frame, sheath, roof, ceiling	35	SF	$28.00	$980.00
Porch cover (Walkway cover) — set the cover posts on the shared deck piers, bracket the deck beam to them	2	post	$45.00	$90.00
Porch cover (Walkway cover) — standing seam steel in place of shingles (panels, trims, headwall, snow bar)	35	SF	$6.50	$227.50
Porch cover (Walkway cover) — tear off the existing roof cover and haul	35	SF	$3.00	$105.00
Under-deck prep — 6-mil poly + 2" gravel	198	SF	$1.50	$297.00
Steel frame premium — cut, clip and screw cold-formed members	198	SF	$4.00	$792.00
Take down, store and rehang the owner's roll-down blinds on the new beams	1	lot	$250.00	$250.00

General conditions — at cost, no margin

ITEM	AMOUNT	WHY
General conditions	$791	$4/SF x 197.8 SF

What the price includes — sell values

ITEM	VALUE
Demolition & haul-off	$689
Foundation & structure	$15,527
Decking & fascia	$12,733

ITEM	VALUE
Stairs	$1,376
2 roof covers — lean-to roofs on 6x6 cedar posts, standing seam steel roof with snow retention, Hardie soffit, fascia and rakes, existing covers torn off, blinds rehung	$25,473
Site & project services	$791
Total, check or ACH	**$56,589**
Total, financed	**$60,848**

THE QUOTE homeowner-facing · facts only

QUOTE · PRE-ENGINEERING

281 S JEFFERSON AVE — TWO DECKS + TWO LEAN-TO COVERS (CEMCO STEEL, TIMBERTECH LANDMARK AMERICAN WALNUT)

CEMCO cold-formed galvanized steel frame — 7-1/4" C-joists at 12" OC, boxed steel beams — on 7 Diamond Pier footings. TimberTech Landmark American Walnut decking, 2 lean-to roof covers with a Black standing seam roof.

197.8 SF · 2 zones · **1'-3"** above grade, engineered · **30 psf** snow design

Prepared for the owner of 281 S Jefferson Ave, Louisville

PRICE

Total investment $60,848 — financed, no money down

- 12 months no payments, no down payment
- 18 months no payments, no down payment
- 6.99% for 10 years — about $706/month

Check or ACH: $56,589 (7% savings)

WHAT THE PRICE INCLUDES

ITEM	VALUE
Demolition & haul-off	$689
Foundation & structure	$15,527
Decking & fascia	$12,733
Stairs	$1,376
2 roof covers — lean-to roofs on 6x6 cedar posts, standing seam steel roof with snow retention, Hardie soffit, fascia and rakes, existing covers torn off, blinds rehung	$25,473
Site & project services	$791
Total, check or ACH	**$56,589**
Total, financed	**$60,848**

Engineering — $1,800 to $3,000. Stamped drawings by a Colorado engineer (30 psf snow). GSX provides the engineer and bills the engineering at cost, with no markup. You own the stamped set. It is separate from the deck price above.

INCLUDED — WHAT IT IS

ELEMENT	SELECTION
Decking	TimberTech PVC Landmark, American Walnut; picture frame and dividers in Landmark American Walnut. Grooved boards, 3/16" gaps, a HardieTrim skirt around the frame (Arctic White). Ignition Resistant, Class A, WUI; Limited Lifetime product / 50-yr fade & stain.
Frame	7-1/4" CEMCO cold-formed steel C-joists, 16 ga G90, @ 12" OC; single-ply 7-1/4" steel track rims and ledger track on a steel angle; FLUSH boxed 7-1/4" steel C W: 14'-2", 4 posts at 7 3/16" / 3'-0" / 8'-4" / 14'-1 3/16" (worst 474 lb); FLUSH boxed 7-1/4" steel C M: 11'-6", 3 posts at 15'-2" / 20'-8" / 26'-2" (worst 1,616 lb).

ELEMENT	SELECTION
Foundation	7 Diamond Pier foundations (DP-50/50; upsized where a cover post and the deck share a pier) — no excavation.
Design load	30 psf snow, stamped by a Colorado engineer.
Hardware	Galvanized steel clip angles and self-drilling screws throughout the frame; TimberTech CONCEALoc hidden fasteners in the field and color-matched plugs on the picture frame, every screw the steel-frame type.
Roof covers	2 lean-to covers replaced: 6x6 posts on the Diamond Pier foundations, a new ledger on the house, 2x8 rafters at 16", Black standing seam steel roof, 24 ga, mechanically seamed for the low pitch, over high-temp underlayment, with a snow bar across the low eave; James Hardie soffit ceiling, HardieTrim fascia and rakes in Arctic White. Main cover: 91" clear at the house to 82.5" at the beam; Walkway cover: 93" clear at the house to 88" at the beam. The roll-down blinds are taken down, stored and rehung on the new beams.
Site	The existing decks and roof covers removed and hauled off; 6-mil poly and 2" of gravel under the decks; a concrete landing pad at the stair.
Not included	Electrical — no lighting, fans or outlets (owner's existing circuits are made safe and left as found); The owner's roll-down blinds themselves (taken down, stored and rehung only); Grading beyond the under-deck prep; Variance or PUD amendment, if Planning requires one.

PLAN

2 zones · 197.8 SF · 26'-8" along the house · 1'-3" above grade

- **W · Walkway — 14'8" x 3'8" under the small cover** — 14'-8" x 3'-8".
- **M · Main deck — 12' x 12' under the main cover** — 12'-0" x 12'-0".

Zones are named left to right standing in the yard facing the house.

- Stair front:M: 2 risers @ 7.50", 1 treads, 6 stringers, 5'-0" wide

SCHEDULE

1. Engineering & ordering (2–3 weeks). Stamped drawings, materials ordered, samples approved.
2. Day 1 — protection, utilities located (811), old deck out.
3. Day 2 — layout, 7 Diamond Piers driven, ledger set.
4. Days 3–4 — posts and beams set.
5. Days 5–6 — frame, flashing at every wall.
6. Days 7–8 — decking, borders first.
7. Day 9 — stairs.
8. Day 10 — final clean; end of construction.

NEXT STEP


Engineering first. This is a quote: the numbers depend on the stamped engineering, so the first step is engineering. GSX provides the Colorado engineer and supplies the design package; you pay GSX the engineer's cost at no markup and you own the stamped set. When the stamped set is in hand, GSX issues a fixed-price proposal on these numbers with the payment terms.

Quote, not a contract: a fixed-price proposal follows the stamped engineering. Quote numbers hold 30 days. Renders and plan are design intent; the stamped engineering set governs structure, dimensions and locations.

RENDERS 3D model · design intent · timbers shown as specified



From the yard

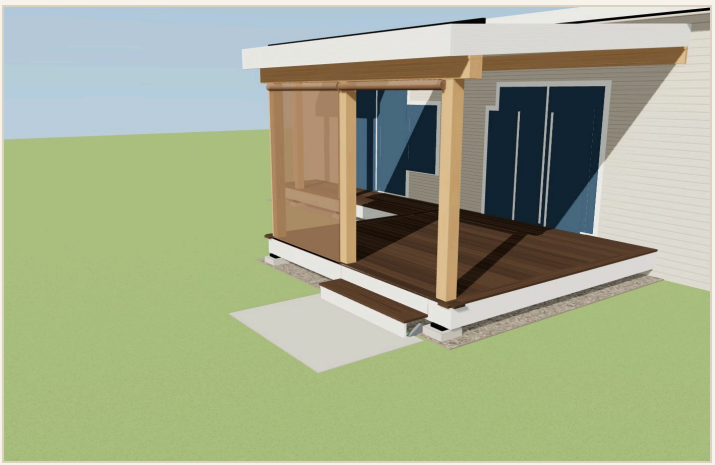

From the front corner



Standing on the deck




Under the deck — posts, beams, footings

SUN AND SHADE


the real sun at this address · the covers and the blinds through the day




Jul 15 · 9 AM — sun E, 35° up

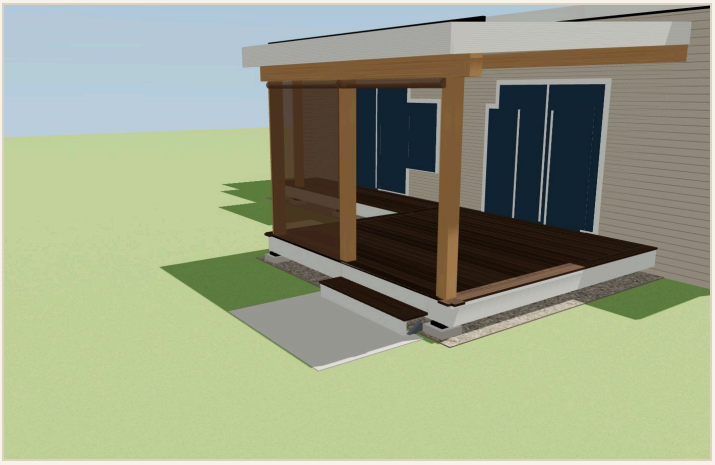


Jul 15 · 12 PM — sun SE, 67° up

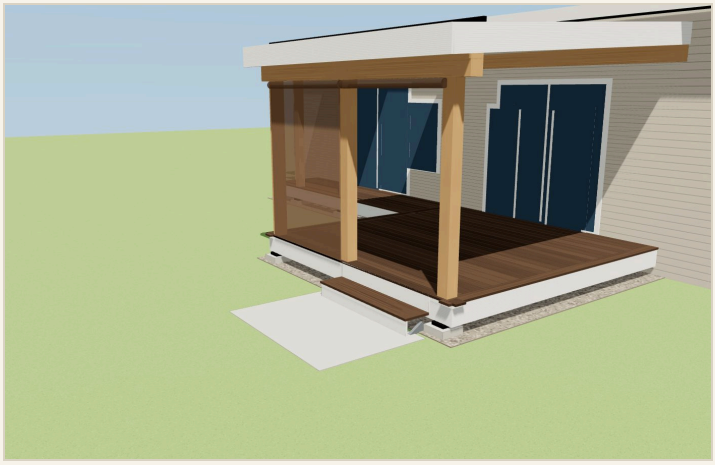

Jul 15 · 3 PM — sun WSW, 60° up

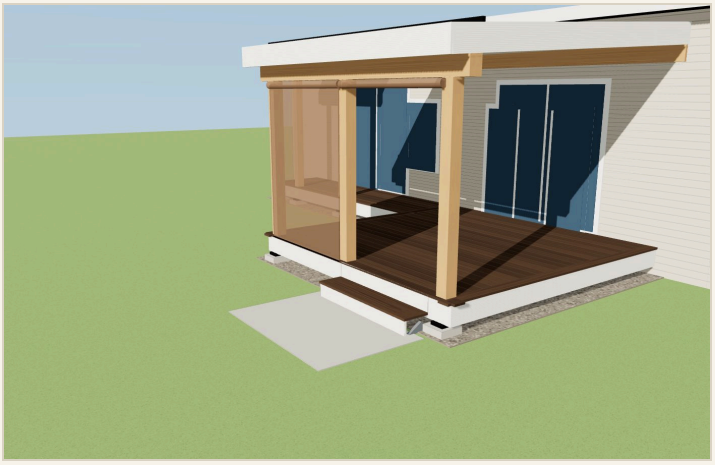


Jul 15 · 6 PM — sun W, 26° up

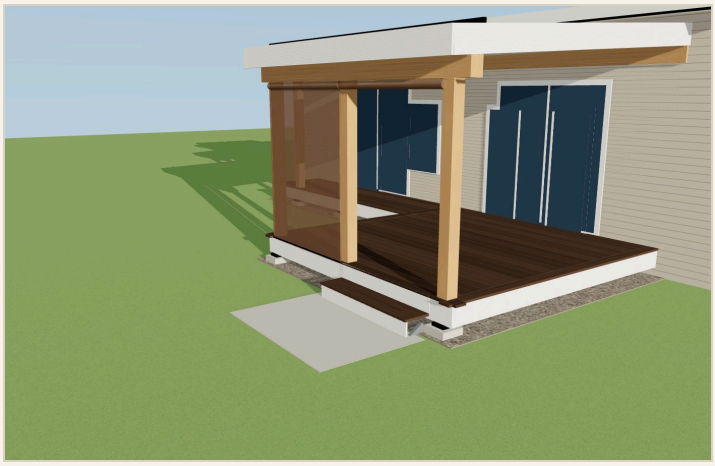


Dec 21 · 3 PM — sun SW, 14° up

ISOMETRICS

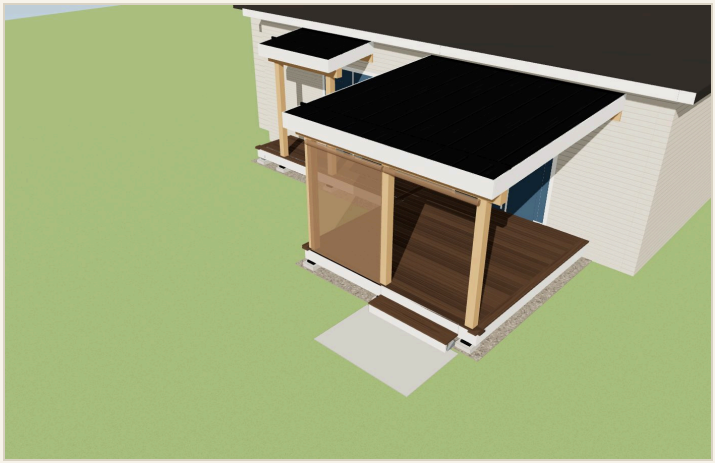


Isometric from the stair corner

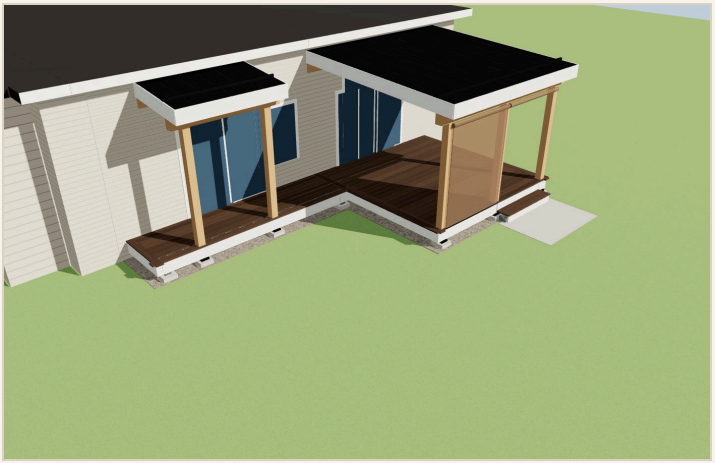


Isometric from the open corner



Low isometric

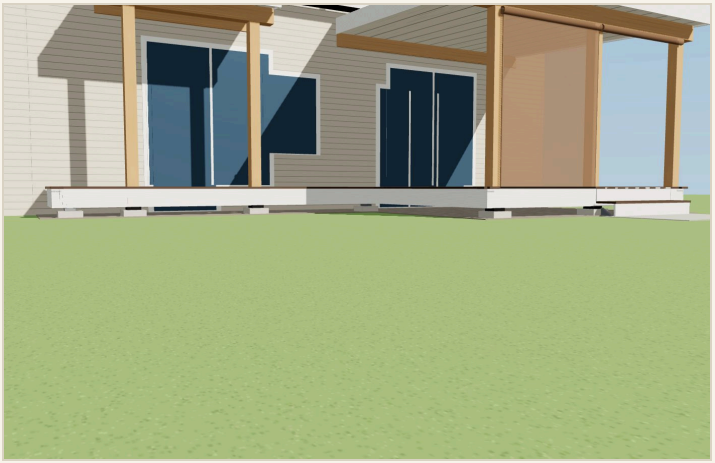


Isometric from under the frame

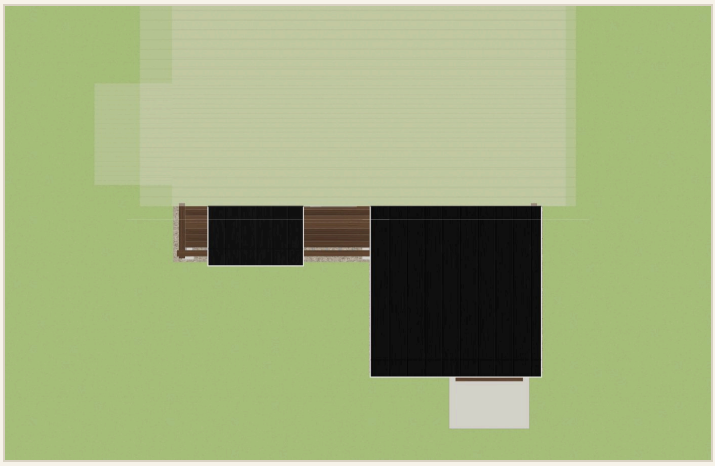


Plan from above


EXPLODED

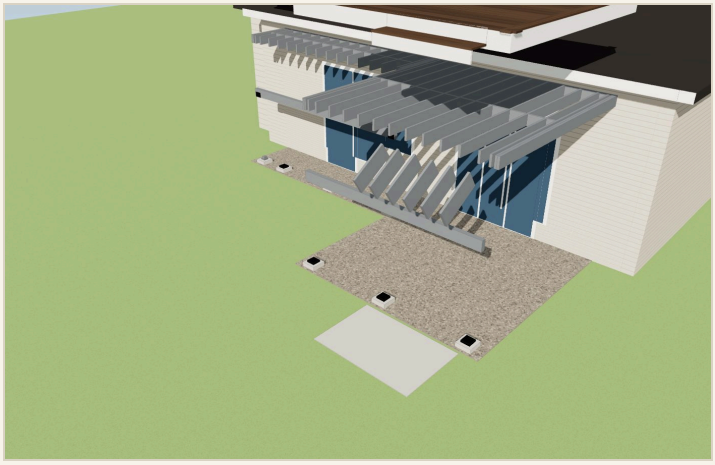


Exploded — every layer

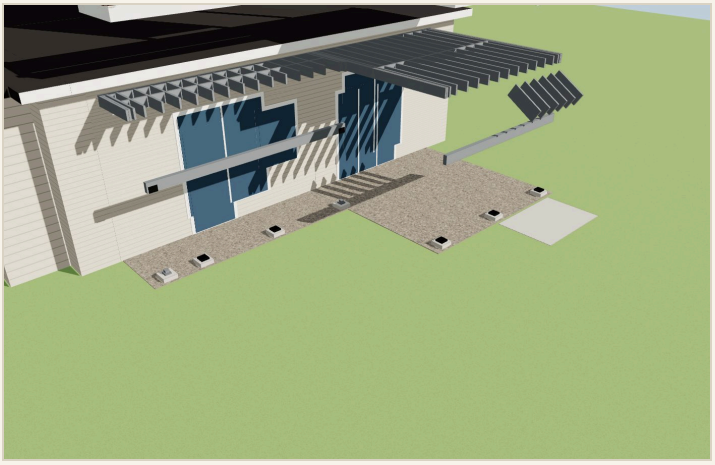

Exploded — from the open corner

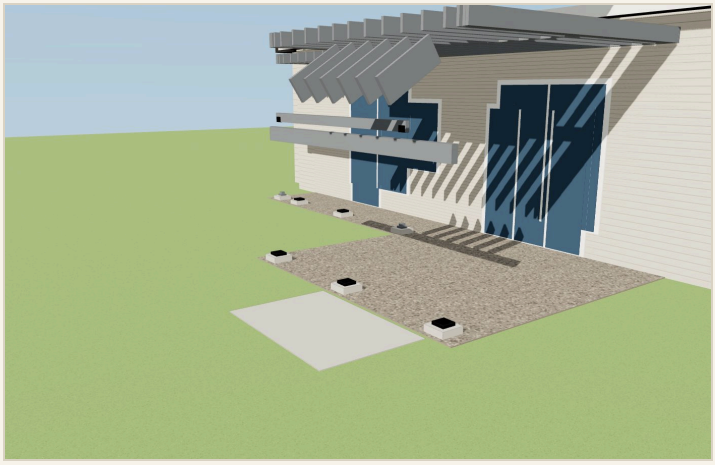

Exploded — from the front corner

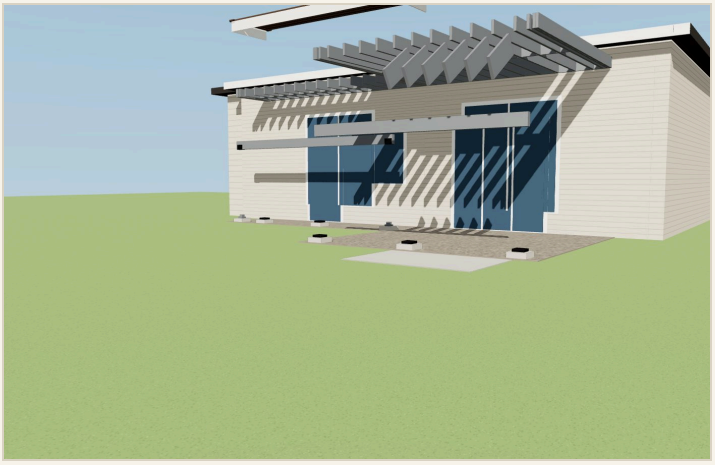

Exploded — low angle

G-001 General notes · design criteria

G-001 GENERAL NOTES · DESIGN CRITERIA

Loads, codes, structure summary, sheet index, site — the permit-set cover

281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...

GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 FOR REVIEW

PROJECT

281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel, TimberTech Landmark American Walnut)
281 S Jefferson Ave, Louisville CO 80027
197.8 SF · 1'-3" above grade · 2 zones

DESIGN CRITERIA

Deck live load	40 psf uniform (IRC Table R301.5); guards 200 lb concentrated / 50 plf
Ground snow	30 psf (ground; deck design uses the larger of snow and live) — 40 psf live governs; ground snow per the ASCE hazard tool (Louisville criteria) — 30 psf used here (city sheet, non-reducible); Boulder County layer shows 40 psf: engineer confirms
Dead load	10 psf deck · 15 psf porch cover (standing seam steel on sheathing, Hardie soffit; 12 psf actual, 15 used) carried on the deck posts
Roof snow (cover)	30 psf flat-roof design snow, sliding snow off the house roof + drift at the house wall per ASCE 7 Ch. 7
Design total	50 psf on the deck · cover posts add roof snow + dead to the deck frame and footings (engineered)
Wind	145 mph Vult (3-second gust), Exposure C (Louisville 2024 design criteria), Risk Cat. II
Frost depth	3'-0" (footings bear below)
Soil bearing	1,500 psf presumptive (IRC R401.4.1) — no soils report
Seismic	B
Wildfire (WUI)	not in a WUI zone
Codes	2024 IRC / IBC as adopted and amended by the City of Louisville (Ord. 1907, Series 2025); IRC R507 decks with LMC 15.05.140; IBC Appendix I patio covers; ASCE 7-22 loads; Louisville Fire Hardening provisions; cold-formed steel frame per AISI S240, engineered
Engineering	Stamped structural set by a Colorado PE required — the stamped set governs

STRUCTURE

Footings	DP-50/50
Posts	2 x 3x3 galvanized steel post stubs + 5 cover posts carrying the deck beam
Beams	FLUSH boxed 7-1/4" steel C W: 14'-2", 4 posts at 7 3/16" / 3'-0" / 8'-4" / 14'-1 3/16" (worst 474 lb); FLUSH boxed 7-1/4" steel C M: 11'-6", 3 posts at 15'-2" / 20'-8" / 26'-2" (worst 1,616
Joists	7-1/4" CEMCO cold-formed steel C-joists, 16 ga G90, @ 12" OC
Rims	single-ply 7-1/4" steel track rims and ledger track on a steel angle
Ledger	7-1/4" steel ledger track + 3x3 ledger angle, 1/4" structural screws 2 rows staggered 16" OC into the rim board (engineer confirms) · flashing and membrane as for wood
Decking	TimberTech Landmark American Walnut — 25 rows parallel to the house, picture frame & dividers in Landmark American Walnut, 3/16" gaps, CONCEALoc
Rail	none

SHEET INDEX

G-001	General notes · design criteria
C-100	Site plan
A-001	Isometric · renders
S-100	Foundation plan
S-101	Framing plan
A-101	Decking plan
A-301	Section + front elevation
A-401	Roof covers — plan + section
D-501	Details
T-400	Build steps (build set)
T-700	Order + schedules (takeoff)

SITE

Rear / front lot line: deck edge 12.0' from the line, setback per the PUD...
Side lot line: deck edge 9.8' from the line, setback per the PUD —...

FLAGS (INTERNAL — remove before the permit submittal)

ENGINEER	basic wind speed 145 mph — uplift on the frame and rail loads;...
ENGINEER	Main cover: cover post + deck beam share a Diamond Pier — worst...
ENGINEER	Main cover: a lean-to under the house eave takes sliding snow off...
ENGINEER	Walkway cover: a lean-to under the house eave takes sliding snow...
ENGINEER	CEMCO cold-formed steel frame: no prescriptive deck span table in...
CODE	standing seam roof over the deck — metal sheds its snow load onto...
CODE	Louisville amends IRC R507.1: decks supported from the house are...
CODE	Louisville submittal: decking spec sheet showing ASTM E84 Class A...
CODE	under-deck ground: gravel over 6-mil poly (or concrete) where the...

No scale


Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

C-100 SITE PLAN

Parcel, existing house, new decks and roof covers, distances to the lot lines, coverage

281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...

GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 FOR REVIEW

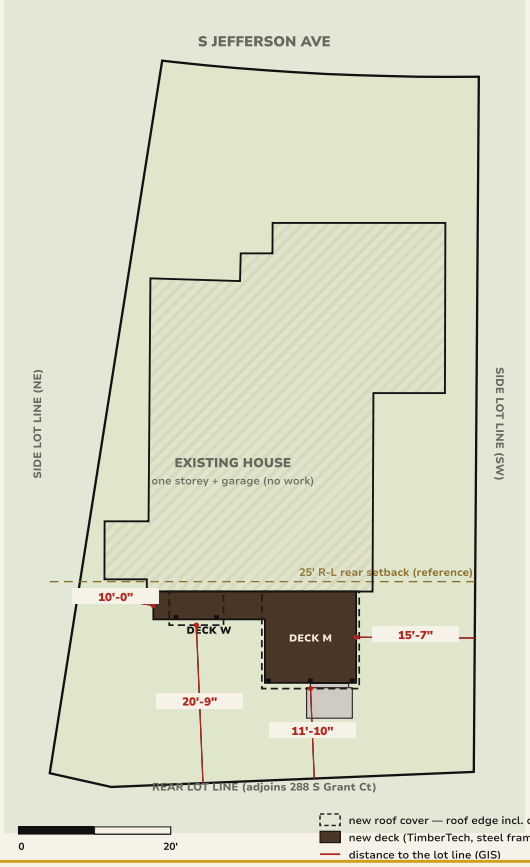



PARCEL

281 S Jefferson Ave, Louisville CO 80027
Parcel 157517119033 · Account R0092293
Lot 33, Block 10, Dutch Creek (plat rec. 00492001, 1982)
Section 17, T1S, R69W
Zoning: R-L within the Dutch Creek PUD (approved 12/15/1981)
Lot 4,678 SF · flood zone X
House 1982 one-storey ranch: 920 SF main floor + 400 SF garage (assessor)

LOT COVERAGE

Lot area	4,678 SF
House + garage (assessor footprint)	1,320 SF
Existing covers to the posts (2024 aerial, est.)	~142 SF (main ~12' x 10'-4", walkway ~5'-4" x 3'-5")
Existing coverage	~1,462 SF · 31.3%
Main cover, new (to the posts) 12'-0" x 11'-9"	141 SF
Walkway cover, new (to the posts) 5'-4" x 3'-5"	18 SF
Proposed coverage	~1,479 SF · 31.6% (+~17 SF)
Uncovered decks	not counted (under 30" above grade)

SETBACKS

Decks are 30" or less above grade — not held to the principal setbacks (city deck handout)
Roof covers: part of the principal structure — they replace the two existing covers in place; the 2024 aerial shows the existing main roof ~1'-5" shallower: field-verify the existing post line
R-L reference setbacks (LMC 17.12.040) — the Dutch Creek PUD plan governs; Planning to confirm
Measured (red): to the nearest lot line from the new work — GIS, not survey

SITE WORK

· Remove the two decks, the two roof covers and the box step; haul off
· Diamond Pier foundations (no excavation spoils), 6-mil poly + 2" gravel under the decks
· New concrete landing pad at the stair
· Roof drainage: covers shed to grade at the low eave, away from the house
· Call 811 before the piers; protect the lawn and the owner's blinds

Boulder County GIS parcel + 2024 Pictometry roof outline, Louisville GIS zoning / PUD layers. GIS lines are not a survey — an ILC governs if Planning requires one.

Plan · approx. 1" = 20' at full size · GIS lines, not a survey


Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

S-100 FOUNDATION PLAN

Footings, posts and beam lines with the footing schedule; beams dashed (below the joists)

281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...

GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 FOR REVIEW

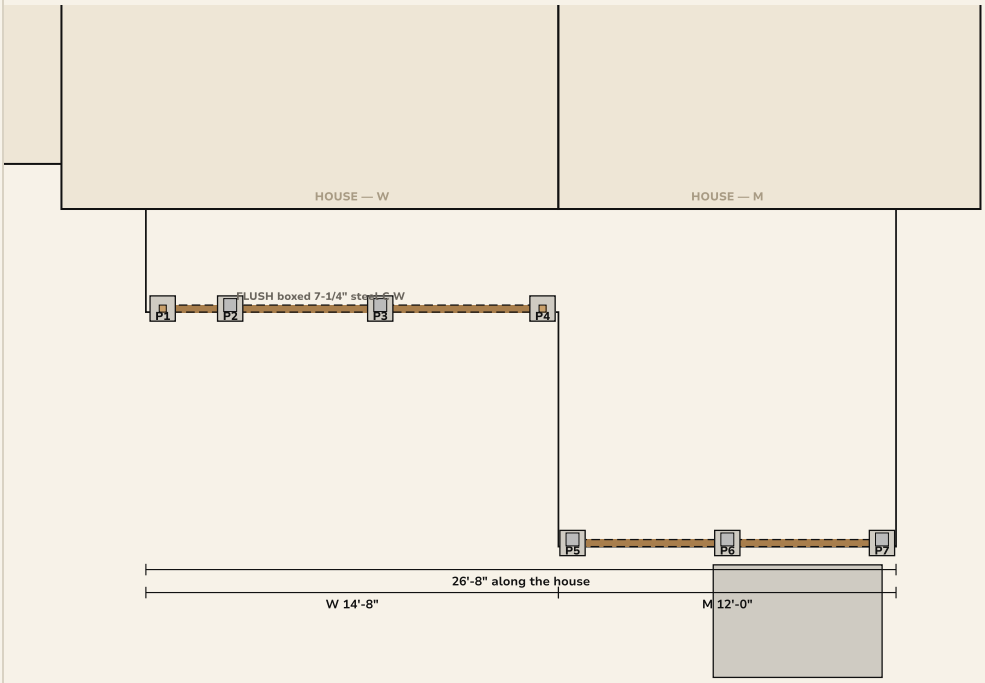

FOOTING SCHEDULE

Diamond Pier DP-50/50 (head + 4 x 50" pins), 3,300 lb allowable

ID	X	Y	ZONE	LOAD
P1	7 3/16"	3'-6 1/2"	W	132 lb
P2	3'-0"	3'-6 1/2"	W	330 lb
P3	8'-4"	3'-6 1/2"	W	474 lb
P4	14'-1 3/16"	3'-6 1/2"	W	273 lb
P5	15'-2"	11'-10 1/2"	M	881 lb
P6	20'-8"	11'-10 1/2"	M	1,616 lb
P7	26'-2"	11'-10 1/2"	M	881 lb

x from the left frame face facing the house; y from the reference wall. Frost 3'-0" · soil 1,500 psf · worst post 1,616 lb

Plan · not to scale · house at the top · dimensions govern

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

S-101

FRAMING PLAN

Ledger, joists, rims, blocking, beams; every member in the model — the cut list is on T-600

281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...

GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 FOR REVIEW



FRAMING NOTES

7-1/4" CEMCO cold-formed steel C-joists, 16 ga G90, @ 12" OC

single-ply 7-1/4" steel track rims and ledger track on a steel angle

7-1/4" steel ledger track + 3x3 ledger angle, 1/4" structural screws 2 rows staggered 16" OC into the rim board

blocking one row over the beam, staggered

FLUSH boxed 7-1/4" steel C W: 14'-2", 4 posts at 7 3/16" / 3'-0" / 8'-4" / 14'-1 3/16" (worst 474 lb); FLUSH boxed 7-1/4"

Connectors:

Steel clip angle 1-1/2" x 1-1/2" x 7" 16 ga G90 — joist to track / beam: 56

Lateral-load tension tie for steel joists (Simpson DTT2Z w/ steel-joist kit or the engineer's detail) — IRC R507.9.2

Cold-galvanizing spray (cut ends, field drilling): 2

Plan · not to scale · house at the top · dimensions govern

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

A-101 Decking plan

A-101 **DECKING PLAN**

Every board, border and divider as it lays; rail posts shown for the pockets

281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...

GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 FOR REVIEW



DECKING

Field: TimberTech Landmark American Walnut, 5.5" x 1", 3/16" gaps

Border & dividers: Landmark American Walnut

Boards run parallel to the house; edge overhang 1" over the fascia

CONCEALoc at every joist in every gap (437)

Cap-Tor xd color-matched ONLY at: first row 1 per joist on the house edge · borders 2 per bearing point @ 16" · fascia 2 at each board end then

Rows per panel: panel 1 (0"–14'-8") 7 rows · panel 2 (14'-8"–26'-8") 25 rows · 2 ripped pieces · 1 breaker — every board one piece wall to border, no butt

Plan · not to scale · house at the top · dimensions govern

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.


A-301 Section + front elevation

A-301 SECTION + FRONT ELEVATION

Cut through the deepest zone; heights to grade, frost line, cantilever, guard

281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...

GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 FOR REVIEW

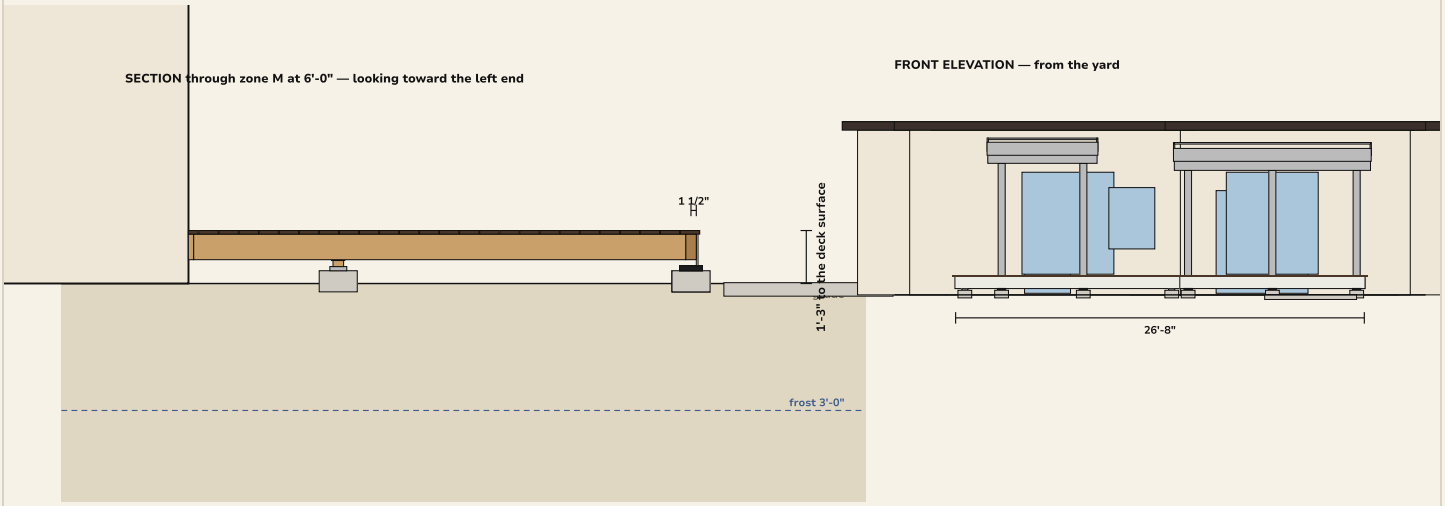

SECTION NOTES

Deck surface 1'-3" above grade

FLUSH boxed 7-1/4" steel C W: 14'-2", 4 posts at 7 3/16" / 3'-0" / 8'-4" / 14'-1 3/16" (worst 474 lb); FLUSH boxed 7-1/4" steel C M: 11'-6", 3 posts at 15'-2" / 20'-8" / 26'-2" (worst

Posts 2 x 3x3 galvanized steel post stubs + 5 cover posts carrying the deck beam on DP-50/50

7-1/4" steel ledger track + 3x3 ledger angle, 1/4" structural screws 2 rows staggered 16" OC into the rim board (engineer confirms) · flashing and membrane as for wood

Section left · elevation right · not to a common scale

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.


A-401 ROOF COVERS — PLAN + SECTION

Lean-to covers: ledger, rafters, beam, posts on the piers, clear heights, pitch, standing seam, Hardie, blinds


281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...

GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 FOR REVIEW


MAIN COVER — PLAN

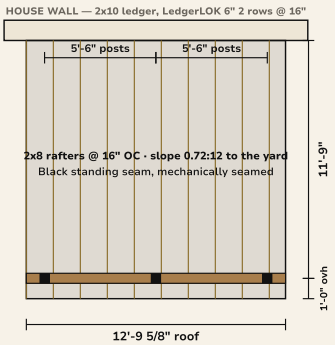


WALKWAY COVER — PLAN

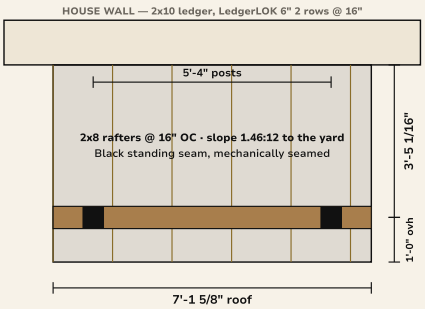

MAIN COVER — SECTION

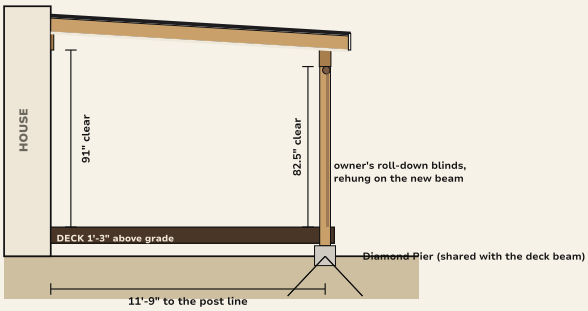

WALKWAY COVER — SECTION

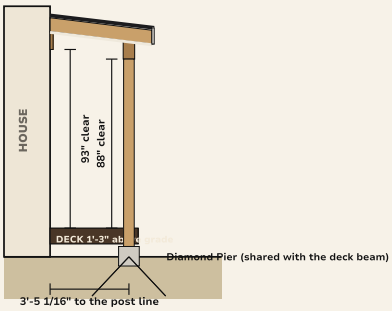

Standing seam 24 ga, 16" panels, 1-1/2" mechanical (double-lock) seam — rated for 0.72:12 · high-temp ice & water underlayment over 7/16" OSB
Headwall flashing counterflashed into the siding · color-matched eave / rake trim · snow bar across the low eave
HardieSoffit cedarmill ceiling · HardieTrim fascia + rakes (Arctic White) · H2.5AZ at every rafter · AC6Z caps
6x6 posts on ABA66Z bases on the Diamond Pier bolt · the engineer's uplift hold-down governs

Standing seam 24 ga, 16" panels, 1-1/2" mechanical (double-lock) seam — rated for 1.46:12 · high-temp ice & water underlayment over 7/16" OSB
Headwall flashing counterflashed into the siding · color-matched eave / rake trim · snow bar across the low eave
HardieSoffit cedarmill ceiling · HardieTrim fascia + rakes (Arctic White) · H2.5AZ at every rafter · AC6Z caps
6x6 posts on ABA66Z bases on the Diamond Pier bolt · the engineer's uplift hold-down governs

Plans and sections not to a common scale · dimensions govern · the stamped set governs

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.


D-501 DETAILS — STEEL FRAME

Steel ledger · joist clips · boxed beam on the shared pier · Diamond Pier · deck edge · under the deck

281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...


GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 FOR REVIEW

1 STEEL LEDGER AT THE HOUSE

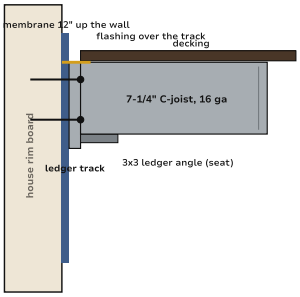


7-1/4" steel ledger track + 3x3 ledger angle, 1/4" structural screws 2 rows staggered 16" OC into the rim board (engineer confirms) · flashing and membrane as for wood

2 JOIST TO TRACK / BEAM

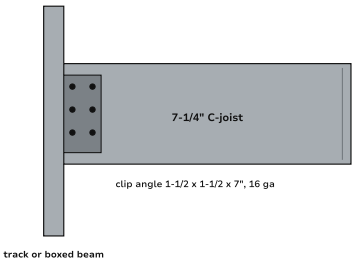


#12-14 self-drilling hex-washer screws, 4 per leg minimum (clip to joist web, clip to track / beam web) — the engineer's clip schedule governs. Cut ends and field holes cold-galvanized.

3 BOXED BEAM · SHARED PIER

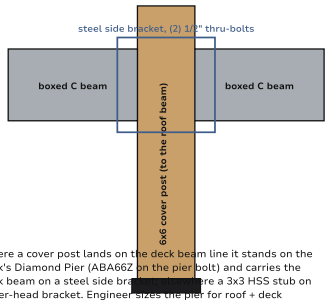


Where a cover post lands on the deck beam line it stands on the deck's Diamond Pier (ABA66Z on the pier bolt) and carries the deck beam on a steel side bracket; there a 3x3 HSS stub on a pier-head bracket. Engineer sizes the pier for roof + deck and the uplift hold-down.

4 DIAMOND PIER

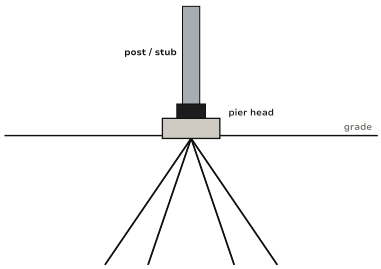

DP-50/50 (4 pins) — no excavation; frost-protected by the pins (submit the evaluation report). 811 locate first.

5 DECK EDGE · HARDIE SKIRT

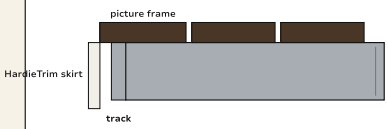


TimberTech Landmark American Walnut: hidden fasteners in the field, the picture frame face-fastened with color-matched plugs — every screw the maker's steel-frame screw for 14–18 ga. HardieTrim skirt on furring screwed to the track.

6 UNDER THE DECK · LOW END



2" gravel over 6-mil poly, sloped away from the house

Walkway low point: 9" surface to grade leaves 0.75" under the frame — dig out / regrade to 2" min. under that run before the poly.

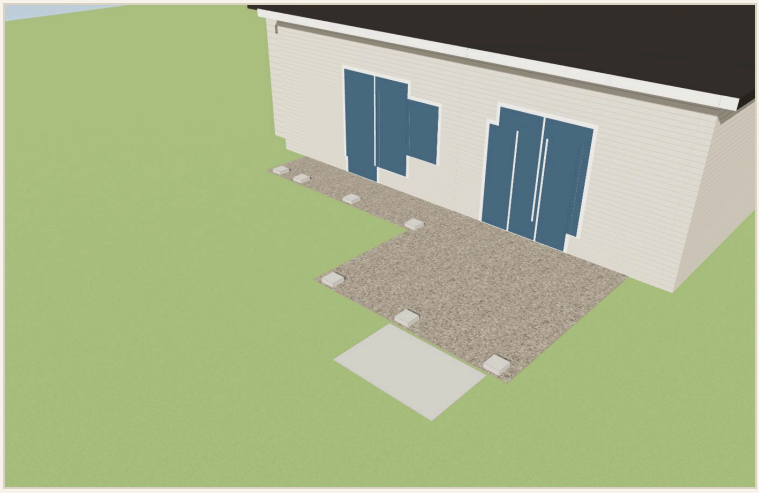

Step 1 · Footings — 7 Diamond Pier DP-50/50 driven-pin footings

T-400 · Step 1 · Footings

GOES IN


- (7) Diamond Pier DP-50/50 (head + 4 x 50" pins, plugs, caps)
- (1) Stair landing pad (front:M stair) — 4" slab, stringers bear on the pad
- (1) Upgrade to Diamond Pier DP-75/63 at the shared main cover posts (roof + deck on one pier)

HOW

- Call 811 and locate before any hole or pin. Strip the existing deck first.
- Pull the beam lines from the house wall: FLUSH boxed 7-1/4" steel C W at 3'-6 1/2" from the reference wall, posts at 7 3/16" / 3'-0" / 8'-4" / 14'-1 3/16"; FLUSH boxed 7-1/4" steel C M at 11'-10 1/2" from the reference wall, posts at 15'-2" / 20'-8" / 26'-2".
- Set 7 Diamond Pier heads level at grade on undisturbed soil and drive the 4 pins in each; caps on.

CHECK

- Footings on the layout within 1/2"; bearing on undisturbed soil
- Pins fully driven, heads level
- Photos before backfill

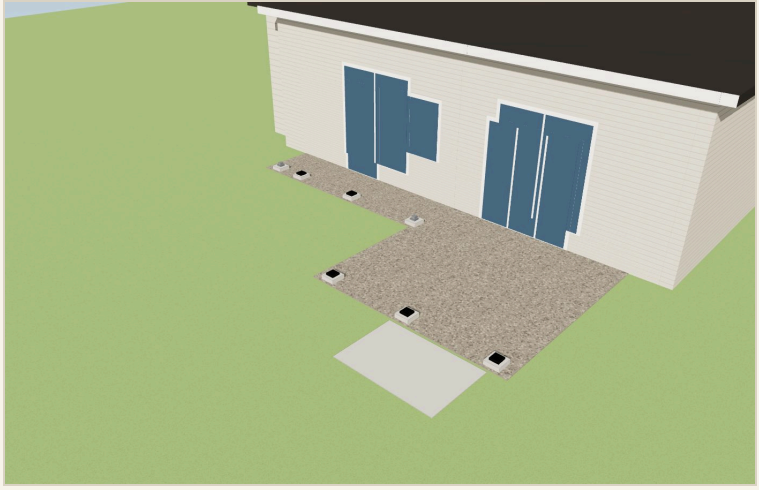

Step 2 · Posts — 6x6 #2 GC on ZMAX bases

T-401 · Step 2 · Posts

GOES IN


- (5) Steel side bracket, 11 ga galvanized — deck beam bolted to the 6x6 cover post (shared pier)
- (3) Simpson ABA66Z post base on the shared Diamond Pier bolt — cover post (pier counted with the deck) — Main cover
- (2) Simpson ABA66Z post base on the shared Diamond Pier bolt — cover post (pier counted with the deck) — Walkway cover

HOW

- 6x6 posts on the bases; cut so the beam top lands at the joist bottom (drop beam) or the joist top (flush beam): FLUSH boxed 7-1/4" steel C W posts 6" / FLUSH boxed 7-1/4" steel C M posts 6" — field-measure each.
- Plumb both ways, brace, then the caps go on with the beams.

CHECK

- Posts plumb to a string; tops on the beam line
- No post in ground contact without a standoff

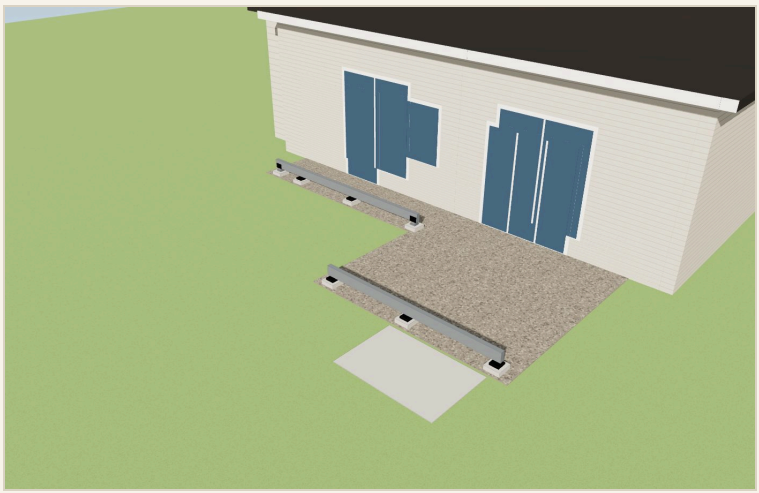

Step 4 · Beams — FLUSH boxed 7-1/4" steel C W (4 posts) · FLUSH boxed 7-1/4" steel C M (3 posts)

T-403 · Step 4 · Beams

GOES IN


- (5) Steel side bracket, 11 ga galvanized — deck beam bolted to the 6x6 cover post (shared pier)

HOW

- FLUSH boxed 7-1/4" steel C W: 14'-2" one piece, 4 posts @ 5'-9 3/16" max
- FLUSH boxed 7-1/4" steel C M: 11'-6" one piece, 3 posts @ 5'-6" max
- Crown up, strung straight, caps screwed off with the SDS screws in the box.

CHECK

- Beam top = joist bottom (drop) / joist top (flush)
- Splices land on a post; caps fully fastened

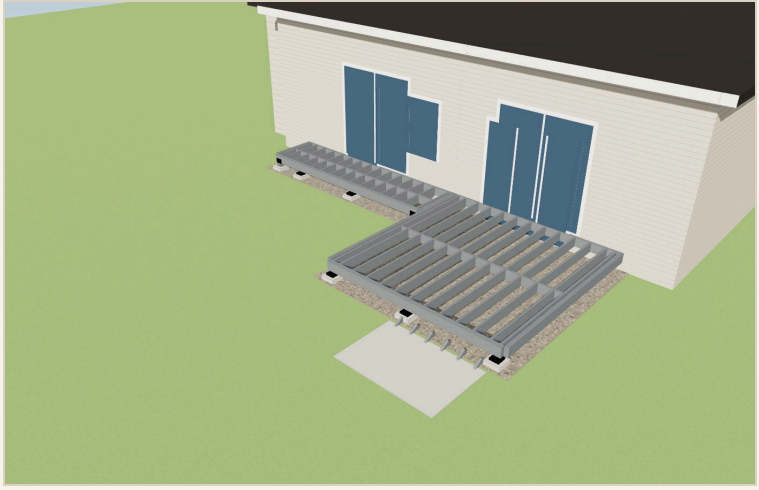

Step 5 · Frame — 2x8 joists at 12", rims, ledger, blocking over the beam

T-404 · Step 5 · Frame

GOES IN


- (1) Grace Vycor Deck Protector 12" x 75' (wall membrane behind ledger + side rims)
- (3) Aluminum L-flashing 10' (over ledger + side rims)

HOW

- 7-1/4" steel ledger track + 3x3 ledger angle, 1/4" structural screws 2 rows staggered 16" OC into the rim board (engineer confirms) · flashing and membrane as for wood
- W: 13 joists @ 12" OC x 3'-3 1/2"; M: 11 joists @ 12" OC x 11'-7 1/2". Crown up, hangers at the ledger, both faces of the flush beam.
- Blocking one row over the beam, staggered.
- Tape every joist top.

CHECK

- Frame square: diagonals within 1/8"
- Every hanger fully nailed; ledger fasteners per the schedule
- Tape continuous; photos of the ledger, hangers and footings before decking

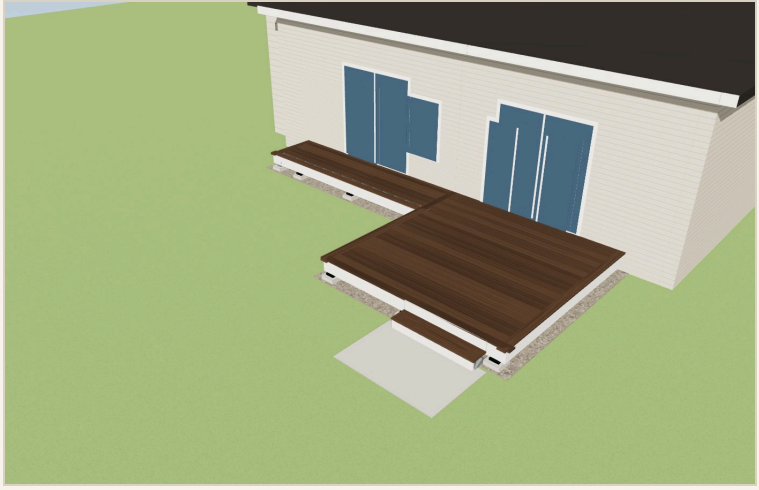

Step 6 · Decking — TimberTech Landmark American Walnut, American Walnut border, hidden fasteners

T-405 · Step 6 · Decking

GOES IN


- (25) TimberTech Landmark American Walnut 1x6x12 Grooved
- (7) TimberTech Landmark American Walnut 1x6x16 Grooved
- (4) TimberTech Landmark American Walnut 1x6x16 Square Edge — borders & dividers
- (1) TimberTech Landmark American Walnut 1x6x20 Square Edge — borders & dividers
- (5) Deck skirt — HardieTrim 4/4 x 12 x 12' smooth ColorPlus Arctic White (wraps the double rim, in place of the composite fascia)
- (1) Color-matched trim screws for HardieTrim, 100 ct (Arctic White)
- (1) ColorPlus touch-up kit, Arctic White

HOW

- CONCEALoc at every joist in every gap (437)
- Cap-Tor xd color-matched ONLY at: first row 1 per joist on the house edge · borders 2 per bearing point @ 16" · fascia 2 at each board end then alternate top/bottom every 12", pre-drilled · stair treads 2 per stringer per board
- Rows per panel: panel 1 (0"–14'-8") 7 rows · panel 2 (14'-8"–26'-8") 25 rows · 2 ripped pieces · 1 breaker. Borders and breakers first, then the field rows from the outer edge toward the house.

CHECK

- 3/16" gaps held
- No cut end shows at the outer edge
- Color: every board from the same run

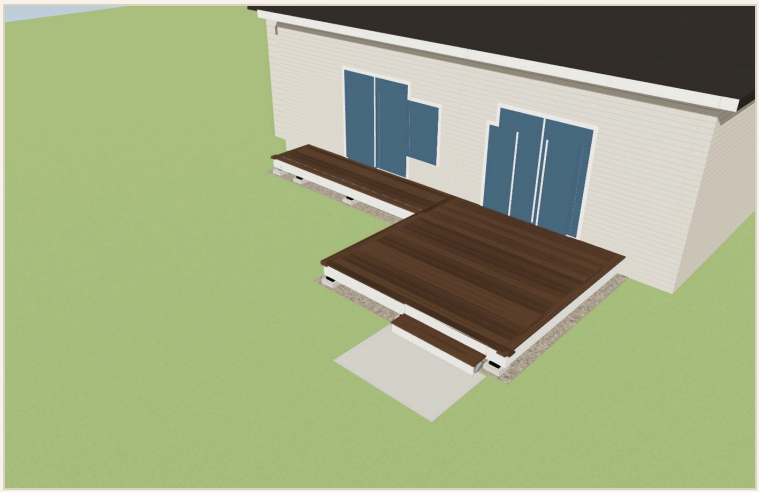

Step 7 · (no rail)


T-406 · Step 7 · Rail

GOES IN

HOW

CHECK

- —
- Cables tensioned / balusters under 4" clear
- End of construction

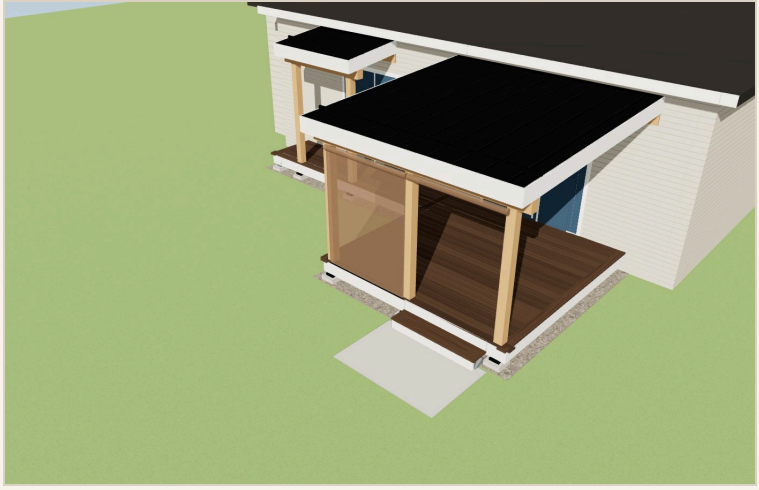

Step 8 · Your room

T-407 · Step 8 · Porch cover

GOES IN

- (3) 6x6 x 10' Western red cedar post (cover) — Main cover
- (2) 2x10x16 #1 SYP — cover beam (2 ply) — Main cover
- (1) 2x10x16 #1 SYP — cover ledger on the house — Main cover
- (10) 2x8x14 #1 SYP — cover rafters @ 16" OC — Main cover
- (3) 2x8x16 #1 SYP — cover fascia / sub-fascia — Main cover
- (6) 7/16" OSB roof sheathing 4x8 — Main cover
- (170) Standing seam roof — 24 ga steel 16" 1-1/2" mechanically seamed (double-lock, low-slope rated) panels x 13.2' (Black, PVDF), 10 panels — Main cover
- (1) High-temp self-adhered ice & water underlayment, 2 sq roll (under every metal panel) — Main cover
- (2) Standing seam eave / drip trim 10', color-matched — Main cover
- (3) Standing seam gable / rake trim 10', color-matched — Main cover
- (2) Headwall (ledger) flashing with Z-closure 10', color-matched — into the house siding / counterflash — Main cover
- (3) Foam + metal closure strips at eave and headwall, 10' — Main cover
- (1) Panel clips + pancake-head screws, box of 250 — Main cover
- (1) Color-matched #10 woodgrip trim screws w/ washers, 250 — Main cover

HOW

- Cover ledger on the house at the top of the pitch, LedgerLOK 2 rows; 6x6 cedar posts on the deck over blocked joists, (2)2x10 beam at the rail line; 2x8 rafters @ 16" OC with hurricane ties, 13.2' with the 18" overhang; 2x8 sub-fascia and OSB.
- High-temp self-adhered underlayment over every sheet, headwall flashing counterflashed into the house wall, eave trim, then the 24 ga snap-lock panels one piece eave to headwall — clips 18" OC on each seam, no face screws in the field; rake trim and closures last; snow retention bar clamped to the seams 12-18" above the low eave, the full width.
- Ceiling: HardieSoffit 4x10 cedarmill Arctic White panels 6" OC stainless ring-shank at every rafter;

HardieTrim 4/4 x 7.25 smooth Arctic White fascia and rakes over the 2x8 sub-fascia, color-matched trim screws.

CHECK

- Ledger flashed and counterflashed — hose test before the ceiling closes
- Posts plumb over blocking, beam level, rafters tied
- Panels straight, seams engaged full length, no oil-canning; snow bar continuous
- Water sheds clear of the deck edge

3D MODEL



The interactive 3D model lives at the online version of this document.