

Glengarry Pl · Upper Deck · Option B

Prepared for the owner · 166 Glengarry Pl, Castle Rock, CO 80108 · September 21, 2026

CHECK OR ACH	FINANCED	MONTHLY
\$130,330	\$140,140 no money down	\$1,626 6.99% · 10 years



The upper deck rebuilt on nine new concrete caissons and 8x8 Douglas fir posts. The stucco parapet stays; everything else is new: a 2x12 pressure-treated frame at 12" on centre, 6x12 Douglas fir beams, TimberTech Vintage Coastline decking with a Dark Hickory picture frame, and a new stair with a landing and turn to the lower level.

AT A GLANCE



From the yard



Isometric from the open corner

Deck	741.5 SF · 12'-0" above grade · 74.0 LF of outer edge
Decking	TimberTech Vintage Coastline, picture frame and breaker boards in Vintage Dark Hickory · Cortex fasteners with color-matched plugs
Rail	The existing stucco parapet stays; Fulton Black 36" rail on the new stair and landings
Stair	13 risers at 7.4", 4'-0" wide: 7 down to the 4'-0" x 4'-0" and 7'-8" x 5'-8" landing, turn left, 6 down to the lower level · guard rail on the landings
Structure	2x12 pressure-treated frame at 12" on centre, 6x12 Douglas fir beams; 9 x 8x8 on 20" caissons 3'-2" deep
Design load	50 psf (40 psf live governs), stamped by a Colorado engineer


WHAT IT IS included in the price

ELEMENT SELECTION

Decking	TimberTech PVC Vintage, Coastline; picture frame and dividers in Vintage Dark Hickory. Square-shoulder boards, 3/16" gaps, matching fascia. Ignition Resistant, Class A, WUI; Limited Lifetime product / 50-yr fade & stain.
Railing	The existing stucco parapet stays on the deck edges. TimberTech Fulton Rail, Black, 36" on the new stair and landings.
Frame	57 2x12 #1 True Frame Joist SYP GC @ 12" OC; 2-ply 2x12 front and sides and rear (freestanding); 6x12 Douglas fir beams.
Foundation	20" caissons 3'-2" deep (frost depth 3'-0").
Design load	30 psf snow, stamped by a Colorado engineer. Colorado Wildfire Resiliency Code practice: Class A decking, noncombustible rail, metal flashing at every wall.
Hardware	Simpson ZMAX galvanized connectors. Cortex fasteners with color-matched plugs.



From the front corner

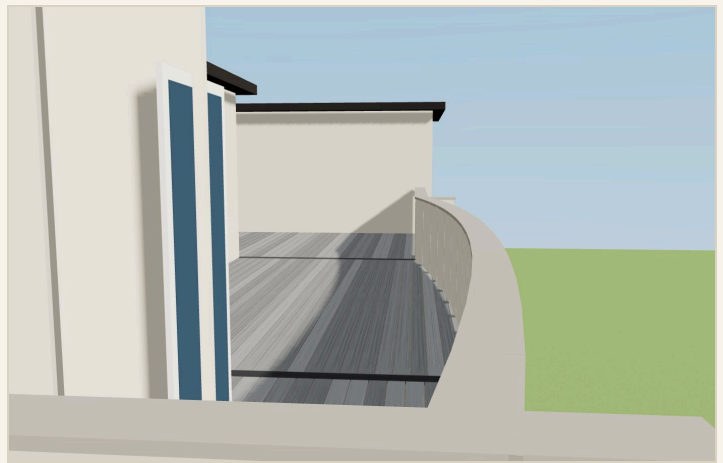


Standing on the deck




Low isometric



Under the deck — posts, beams, footings

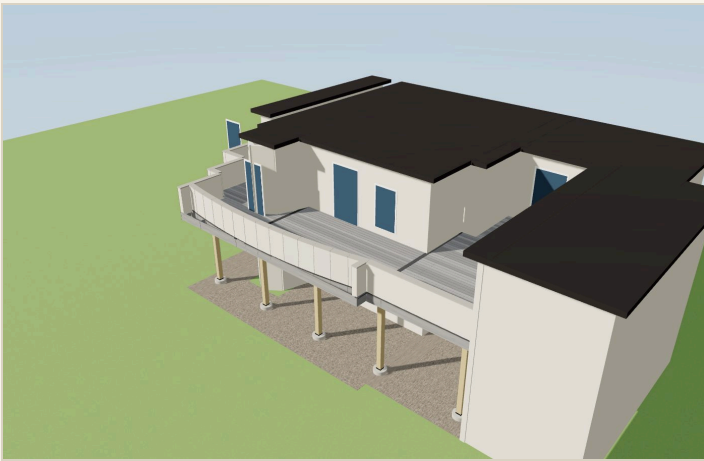


Isometric from the stair corner

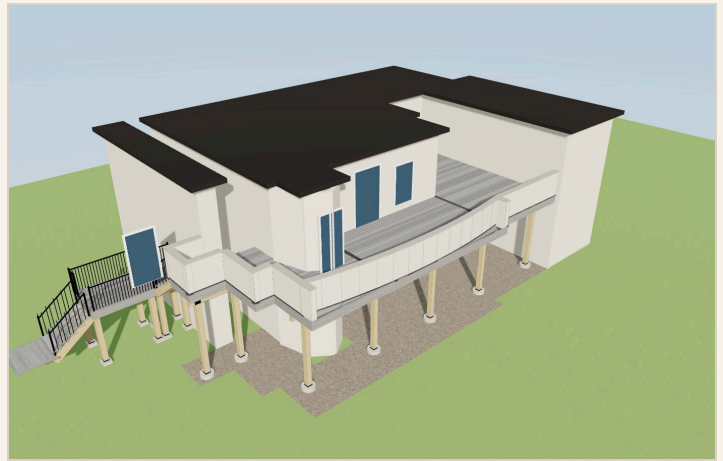

Isometric from the open corner




Isometric from under the frame

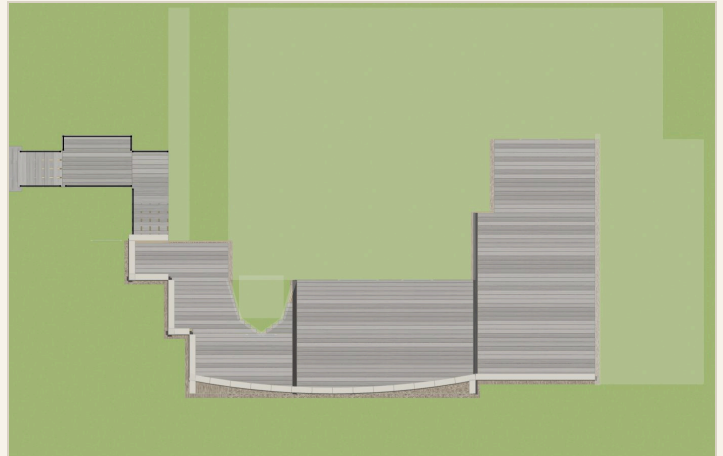


Plan from above

EXPLODED VIEWS every layer pulled apart

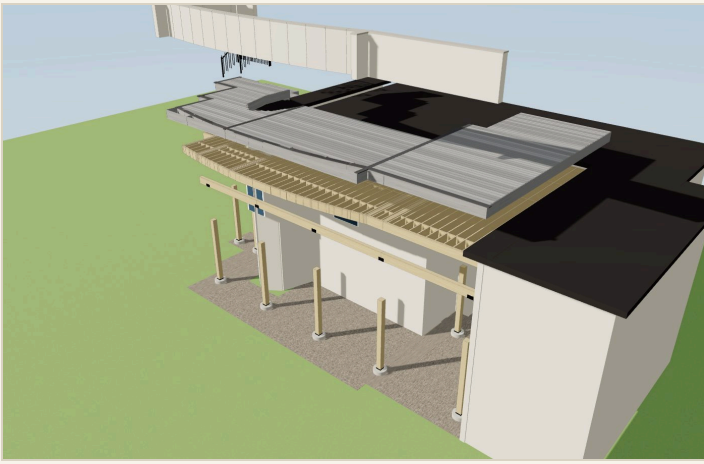

Exploded — every layer

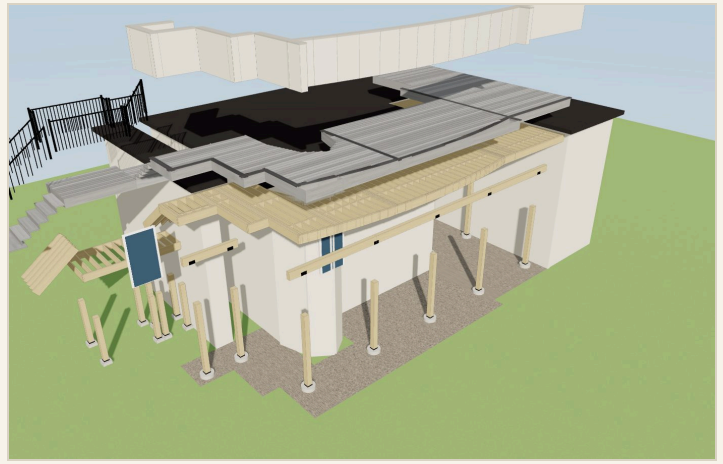

Exploded — from the open corner



Exploded — from the front corner



Exploded — low angle



Posts and beams on the footings



Frame only — joists, rims, beams, ledger

PRICE

Total investment \$140,140 — financed, no money down

- 12 months no payments, no down payment
- 18 months no payments, no down payment
- 6.99% for 10 years — about \$1,626/month

Check or ACH: \$130,330 (7% savings)

WHAT THE PRICE INCLUDES

ITEM	VALUE
Demolition & haul-off	\$2,435
Foundation & structure	\$59,650
Decking & fascia	\$45,479
Stairs & stair rail	\$19,800
Site & project services	\$2,966
Total, check or ACH	\$130,330
Total, financed	\$140,140

Engineering — \$1,800 to \$3,000. Stamped drawings by a Colorado engineer (30 psf snow, caissons). GSX provides the engineer and bills the engineering at cost, with no markup. You own the stamped set. It is separate from the deck price above.

Options

Each line is the whole difference, installed, against the price above.

OPTION	CHECK OR ACH	FINANCED	MONTHLY
Keep the existing columns and caissons	−\$11,434	−\$12,295	−\$143/mo
TimberTech Fulton black rail in place of the stucco parapet	+\$8,997	+\$9,674	+\$112/mo

NEXT STEP

Engineering first. This is a quote: the numbers depend on the stamped engineering, so the first step is engineering. GSX provides the Colorado engineer and supplies the design package; you pay GSX the engineer's cost at no markup and you own the stamped set. When the stamped set is in hand, GSX issues a fixed-price proposal on these numbers with the payment terms.

Quote, not a contract: a fixed-price proposal follows the stamped engineering. Quote numbers hold 30 days. Renders and plan are design intent; the stamped engineering set governs structure, dimensions and locations.



The interactive 3D model lives at the online version of this document.

GS Exterior Experts · Deck Division

Renders and drawings are design intent; dimensions on the sheets govern. Numbers hold 30 days.