PERMIT SET

1675 Summit Point Ct · Main Deck + Porch Cover · Permit Set

1675 Summit Point Ct, Colorado Springs · William Wright · main deck and porch cover · TimberTech Vintage English Walnut, Cortex face screws · Cinch Satin Black rail with English Walnut drink rail · HardieTrim skirt · October 22, 2026

SHEET INDEX

1. Main deck + porch cover · **G-001** General notes · design criteria
2. Main deck + porch cover · **C-100** Site plan
3. Main deck + porch cover · **A-002** Isometric — assembled, labeled
4. Main deck + porch cover · **A-003** Isometric — exploded, labeled
5. Main deck + porch cover · **S-100** Foundation plan
6. Main deck + porch cover · **S-101** Framing plan
7. Main deck + porch cover · **S-102** Structure isometric, labeled
8. Main deck + porch cover · **A-101** Decking plan
9. Main deck + porch cover · **A-201** Railing plan + elevation
10. Main deck + porch cover · **A-202** Elevations
11. Main deck + porch cover · **A-301** Section + front elevation
12. Main deck + porch cover · **A-401** Roof covers — plan + section
13. Main deck + porch cover · **A-402** Roof covers — exploded isometric, labeled
14. Main deck + porch cover · **D-501** Details
15. Main deck + porch cover · **D-502** Connection details — frame
16. Main deck + porch cover · **D-504** Connection details — deck edge, rail, lateral

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale. This set carries no pricing.

G-001 GENERAL NOTES · DESIGN CRITERIA

Loads, codes, structure summary, sheet index, site — the permit-set cover

PROJECT

1675 Summit Point Ct — Deck with Porch Cover
1675 Summit Point Ct, Colorado Springs CO 80919
Prepared for William Wright
431.2 SF · 8'-0" above grade · 4 zones

DESIGN CRITERIA

Deck live load	40 psf uniform (IRC Table R301.5); guards 200 lb concentrated / 50 plf
Ground snow	30 psf (ground; deck design uses the larger of snow and live) — 40 psf live governs
Dead load	10 psf deck · 15 psf porch cover (standing seam steel on sheathing, Hardie soffit; 12 psf actual, 15 used) carried on the deck posts
Roof snow (cover)	30 psf flat-roof design snow (PPRBD minimum 30 psf), sliding snow off the house roof + drift at the house wall per ASCE 7 Ch. 7
Design total	50 psf on the deck · cover posts add roof snow + dead to the deck frame and footings (engineered)
Wind	115 mph Vult, Exposure C, Risk Cat. II (ASCE 7-16) — confirm special wind region
Frost depth	2'-6" (footings bear below)
Soil bearing	1,500 psf presumptive (IRC R401.4.1) — no soils report
Seismic	B
Wildfire (WUI)	Ignition-resistant construction: Class A / WUI-listed decking (TimberTech Advanced PVC), noncombustible rail (steel), fiber-cement skirt, soffit and fascia, 26 ga flashing at every wall, Class A noncombustible standing seam steel roof on the cover with metal eave / rake /
Codes	2021 IRC as amended by Pikes Peak Regional Building Dept; IRC R507 decks; ASCE 7-16 loads; IWUIC / Colorado Springs Wildland-Urban Interface Code; Tables R507.5 / R507.6 / R507.4 / R507.9
Engineering	Stamped structural set by a Colorado PE required — the stamped set governs

STRUCTURE

Footings	DP-50/50
Posts	11 x 6x6
Beams	DROP (2)2x10 SYP P+B+N+W: 36'-11", 7 posts at 1'-0 1/2" / 8'-6 1/4" / 16'-0" / 21'-3" / 26'-6" / 31'-0" / 35'-11 1/2" (worst 2,337 lb); DROP (2)2x10 SYP W: 5'-11", 2 posts at 32'-0 1/2" /
Joists	40 2x10 #1 True Frame Joist SYP GC @ 12" OC
Rims	2-ply 2x10 front and sides
Ledger	2x10 ledger x 37'-0" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 38 fasteners
Decking	TimberTech Vintage English Walnut — 113 rows parallel to the house, picture frame in Vintage English Walnut, 3/16" gaps, Cortex
Rail	Cinch 36" Satin Black: 10 bays, 11 posts, 72.5 LF + drink rail

SHEET INDEX

G-001	General notes · design criteria
C-100	Site plan
A-001	Isometric · renders
A-002	Isometric — assembled, labeled
A-003	Isometric — exploded, labeled
S-100	Foundation plan
S-101	Framing plan
S-102	Structure isometric, labeled
A-101	Decking plan
A-201	Railing plan + elevation
A-202	Elevations
A-301	Section + front elevation
A-401	Roof covers — plan + section
A-402	Roof covers — exploded isometric
D-501	Details

SITE

Rear / front lot line: deck edge 62.8' from the line, 25' required
Side lot line: deck edge 7.6' from the line, 5' required
Easement: Check the plat for rear/side utility + drainage easements...
Parcel 7311205063 (0.389 ac / 16,961 sf), zoning PDZ HS (Planned Development Zone, dev. plan CPC P 85-68(HS)); overlays WUI-O and Hillside HS-O. Setbacks below are the R-1 6000 / HS base standards (rear 25', side 5') — VERIFY against the recorded development plan and an ILC before layout. Distances are scaled from City GIS building/parcel lines (existing deck footprint): rear line ~62.8', east side line ~7.6' at the stair end, west side ~7.8'. Hillside overlay: grading/retaining review if footing excavation disturbs the slope. WUI-O: ignition-resistant deck surface (Class A PVC), 1/8" ember screening, no combustible skirting.


Main deck + porch cover · C-100 · Site plan

C-100 **SITE PLAN**

Parcel, existing house, new decks and roof covers, distances to the lot lines, setbacks

1675 Summit Point Ct — Deck with Porch Cover · 1675 Summit Point Ct,...

October 22, 2026 · Rev 0 · PERMIT SET

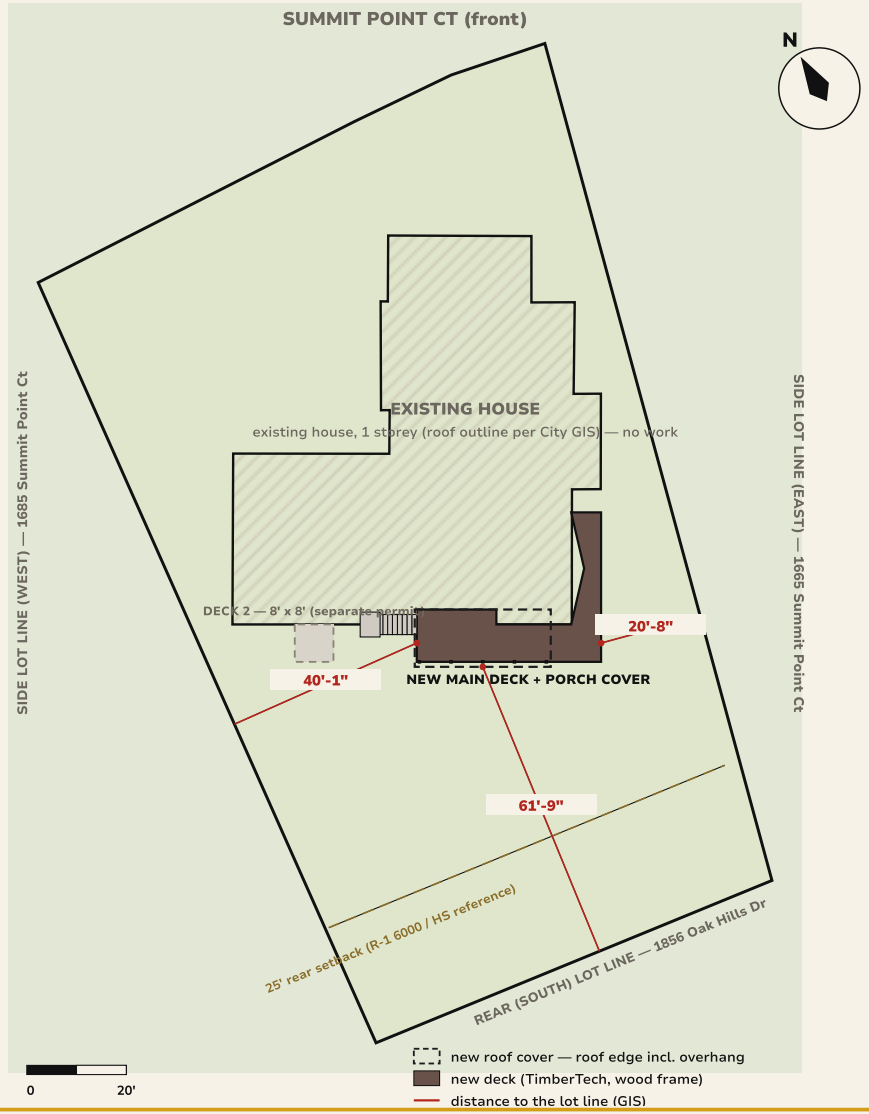

PARCEL

1675 Summit Point Ct, Colorado Springs CO 80919
Parcel 7311205063 · 16,961 SF (0.389 ac) · City of Colorado Springs
Zoning PDZ HS (dev. plan CPC P 85-68(HS)) · overlays WUI-O + Hillside HS-O
House: 1 storey, ~3,989 SF roof outline (City GIS)
Street: Summit Point Ct (front, north) · neighbours 1685 (W), 1665 (E), 1856 Oak Hills Dr (S)

LOT COVERAGE

Lot area	16,961 SF
Main deck (this permit)	~431 SF, 8' above grade, with a 26'-6" x 10'-6" porch...
Deck 2 (separate permit)	8' x 8' at the west end

SETBACKS

Measured (red) from the new deck and cover to the nearest lot lines — GIS, not survey
East side: the wing runs up the east side of the house; 5' side setback applies
Hillside overlay: grading review if footing excavation disturbs the slope;
WUI-O: Class A decking (TimberTech Vintage, Advanced PVC), no combustible skirting
Measured (red): to the nearest lot line from the new work — GIS, not survey

SITE WORK

· Remove the existing L deck and haul off
· Diamond Pier DP-50 foundations (no excavation spoils, frost-protected), 6x6 posts, drop beams
· Porch cover over the porch and chimney bays, posts at the rail line
· 4' stair at the west end of the deck to a concrete landing pad
· Call 811 before digging; protect the slope and the yard

City of Colorado Springs GIS: E911 address point, LandRecords parcel 7311205063, BuildingsImpSurfaces footprint (roof/drip line), Transportation streets, 2018 / 2022 / current aerials. GIS lines are not a survey; deck dimensions are field-measured. An ILC governs if the City asks.

Plan · approx. 1" = 20' at full size · GIS lines, not a survey

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

Main deck + porch cover · A-002 · Isometric — assembled, labeled


A-002

ISOMETRIC — ASSEMBLED, LABELED

Everything you see called out: piers, decking, picture frame, skirt, stair, roof covers, finishes

1675 Summit Point Ct — Deck with Porch Cover · 1675 Summit Point Ct,...

October 22, 2026 · Rev 0 · PERMIT SET

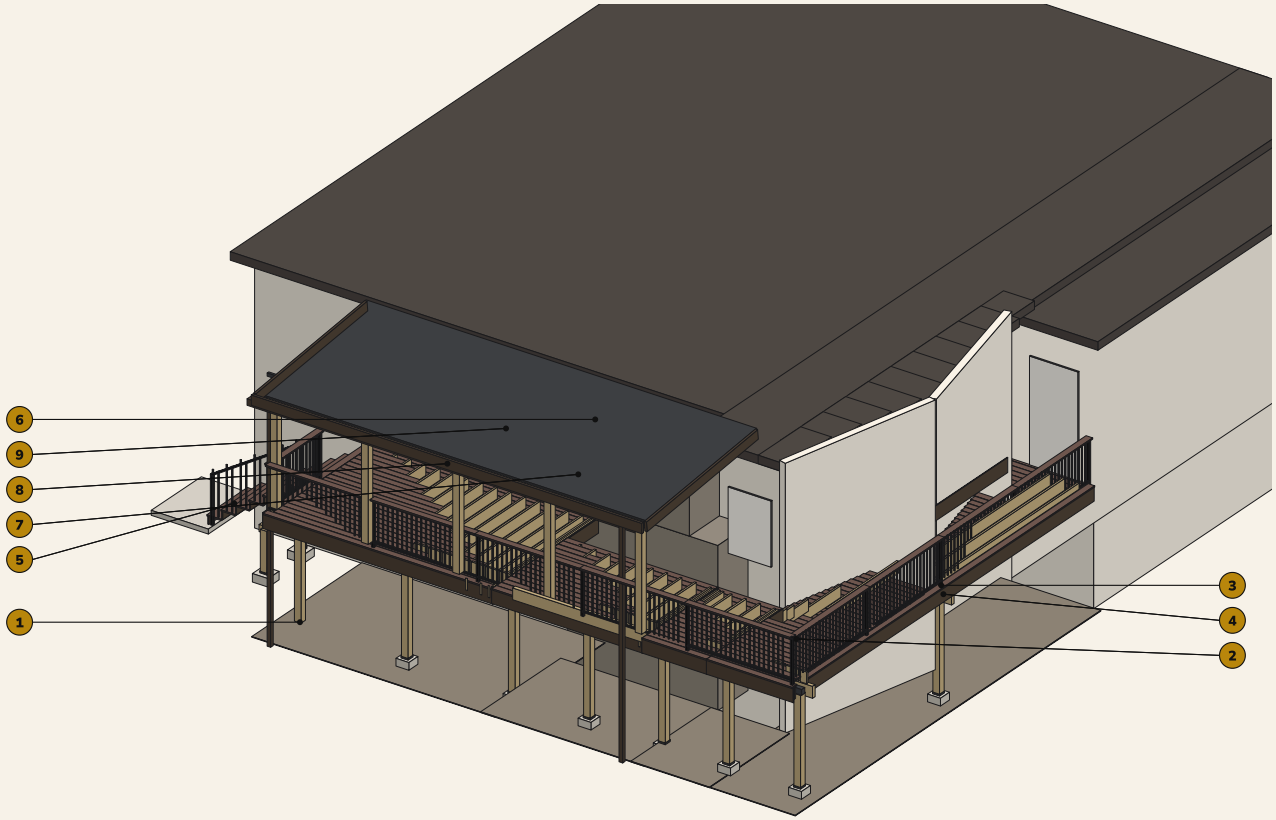

KEY

1. Diamond Pier DP-50/50 — head + 4 driven pins (frost-protected, no excavation)
2. TimberTech Vintage English Walnut field decking, hidden fasteners
3. Picture frame + breaker boards — TimberTech Vintage English Walnut
4. HardieTrim skirt
5. Stair
6. standing seam, 24 ga, mechanically seamed
7. Snow retention bar, clamped to the seams
8. HardieTrim fascia + rakes
9. HardieSoffit cedarmill ceiling

House shown for context only (the deck work only). The frame under the decking is called out on S-102 and A-003.

Axonometric · not to scale · the model the plans are drawn from


Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

A-003 ISOMETRIC — EXPLODED, LABELED

Each build layer lifted in order: piers · posts · beams · frame · decking · stair · rail · roof covers layer...

1675 Summit Point Ct — Deck with Porch Cover · 1675 Summit Point Ct,...

October 22, 2026 · Rev 0 · PERMIT SET

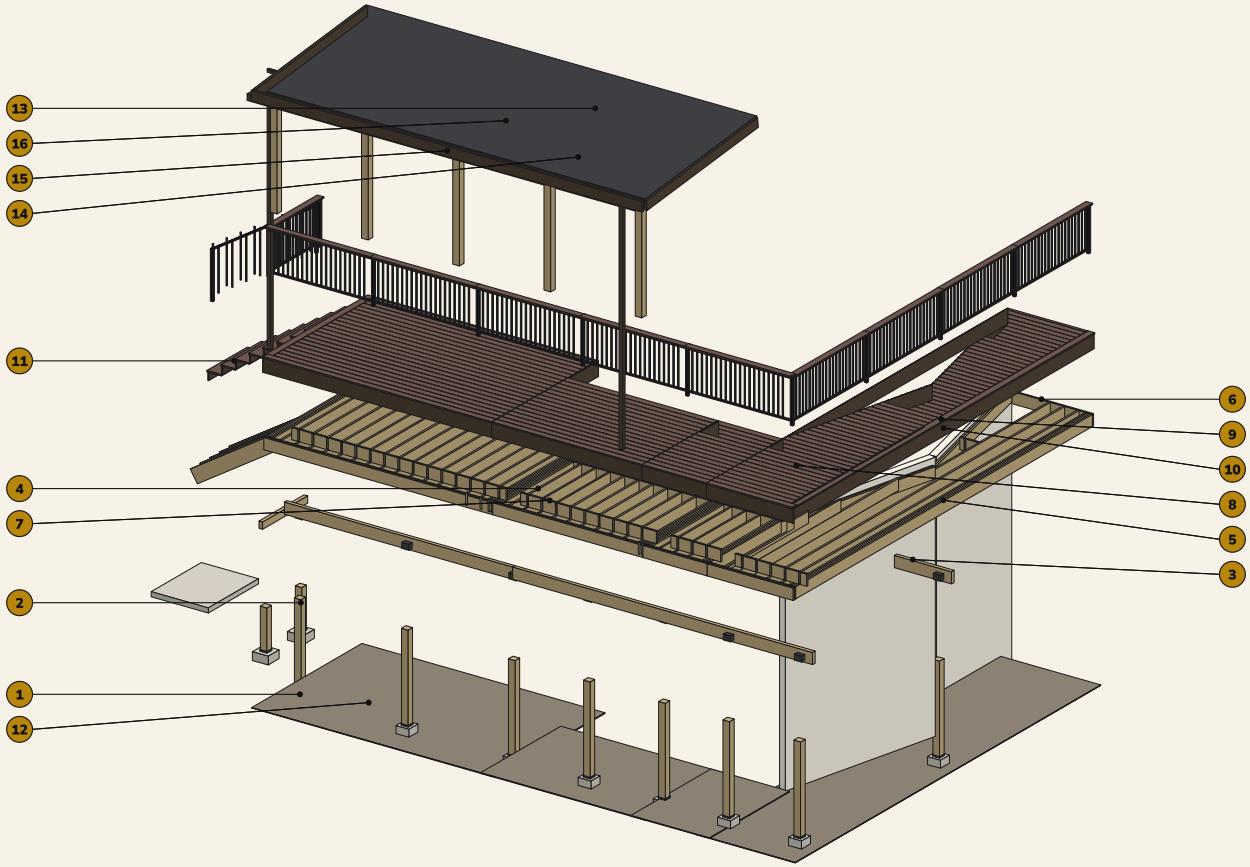

KEY

1. Diamond Pier DP-50/50 — head + 4 driven pins (frost-protected, no excavation)
2. 6x6 post on a ABA66Z standoff base
3. Beam
4. 2x10 joist
5. Rim
6. Ledger
7. Blocking
8. TimberTech Vintage English Walnut field decking, hidden fasteners
9. Picture frame + breaker boards — TimberTech Vintage English Walnut
10. HardieTrim skirt
11. Stair
12. Gravel over 6-mil poly under the decks
13. standing seam, 24 ga, mechanically seamed
14. Snow retention bar, clamped to the seams
15. HardieTrim fascia + rakes
16. HardieSoffit cedarmill ceiling

Layers lifted in build order. Roof covers pulled apart: posts, beam + ledger, rafters, soffit, sheathing, underlayment, standing seam, snow bar, Hardie trim.

Axonometric · not to scale · the model the plans are drawn from

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.


S-100

FOUNDATION PLAN

Footings, posts and beam lines with the footing schedule; beams dashed (below the joists)

1675 Summit Point Ct — Deck with Porch Cover · 1675 Summit Point Ct,...

October 22, 2026 · Rev 0 · PERMIT SET

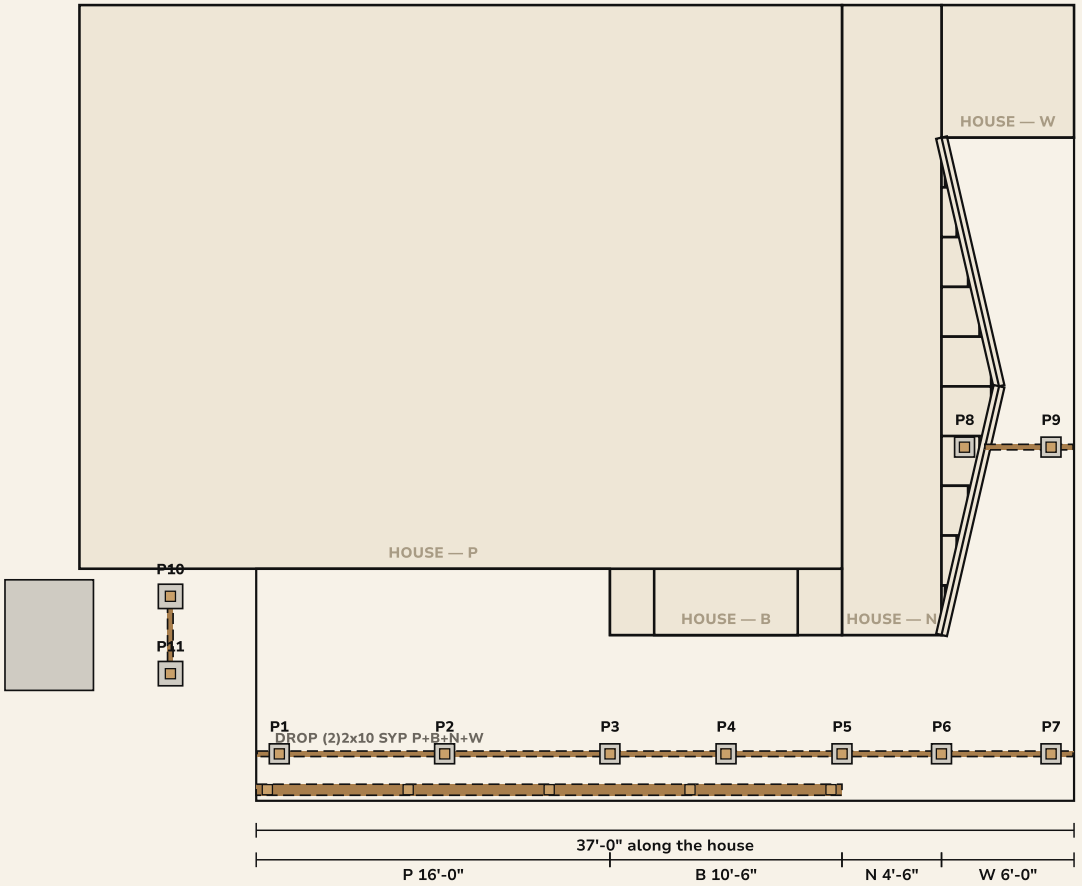

FOOTING SCHEDULE

Diamond Pier DP-50/50 (head + 4 x 50" pins), 3,300 lb allowable

ID	X	Y	ZONE	LOAD
P1	1'-0 1/2"	5'-4 1/2"	P	1,481 lb
P2	8'-6 1/4"	5'-4 1/2"	P	2,337 lb
P3	16'-0"	5'-4 1/2"	P	1,989 lb
P4	21'-3"	5'-4 1/2"	B	1,247 lb
P5	26'-6"	5'-4 1/2"	B	1,158 lb
P6	31'-0"	5'-4 1/2"	N	1,123 lb
P7	35'-11 1/2"	5'-4 1/2"	W	1,576 lb
P8	32'-0 1/2"	-8'-6"	W	2,052 lb
P9	35'-11 1/2"	-8'-6"	W	2,052 lb
P10	-3'-10 5/8"	-1'-9"	stair	carrier
P11	-3'-10 5/8"	1'-9"	stair	carrier

x from the left frame face facing the house; y from the reference wall.
Frost 2'-6" · soil 1,500 psf · worst post 2,337 lb


Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

S-101 FRAMING PLAN

Ledger, joists, rims, blocking, beams; every member in the model — the cut list is on T-600

1675 Summit Point Ct — Deck with Porch Cover · 1675 Summit Point Ct,...

October 22, 2026 · Rev 0 · PERMIT SET

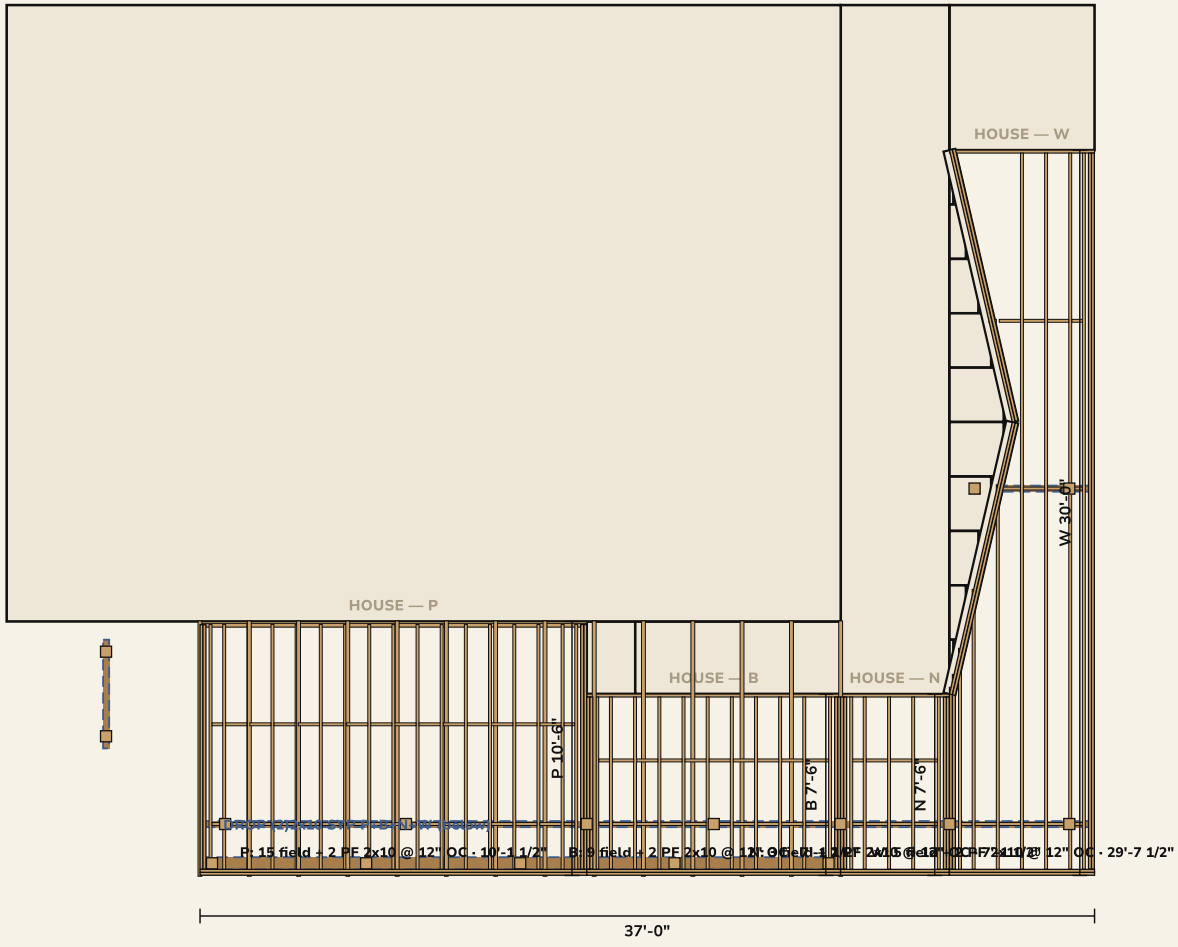

FRAMING NOTES

40 2x10 #1 True Frame Joist SYP GC @ 12" OC

2-ply 2x10 front and sides

2x10 ledger x 37'-0" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 38

blocking one row over the beam, staggered

G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)

DROP (2)2x10 SYP P+B+N+W: 36'-11", 7 posts at 1'-0 1/2" / 8'-6 1/4" / 16'-0" / 21'-3" / 26'-6" / 31'-0" / 35'-11 1/2"

Connectors:

Simpson LUS28Z face-mount hanger 2x8/2x10: 80

Simpson HUCQ210-2-SDS concealed-flange double 2x10 hanger (SDS screws included): 16

Simpson DTT1Z lateral tie kit w/ SDS screws: 16

Simpson H2.5AZ hurricane tie (joists to the drop beam, hidden): 57

Simpson BC46Z post cap 6x post / 4x beam: 9

7/16" x 4-1/2" HDG hex bolt + nut + 2 washers: 28

Simpson LSCZ adjustable stair-stringer connector: 5

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

Main deck + porch cover · S-102 · Structure isometric, labeled


S-102

STRUCTURE ISOMETRIC — FRAME, LABELED

Piers, post bases, posts, post caps, beam, joists, double rims, ledger, blocking

1675 Summit Point Ct — Deck with Porch Cover · 1675 Summit Point Ct,...

October 22, 2026 · Rev 0 · PERMIT SET

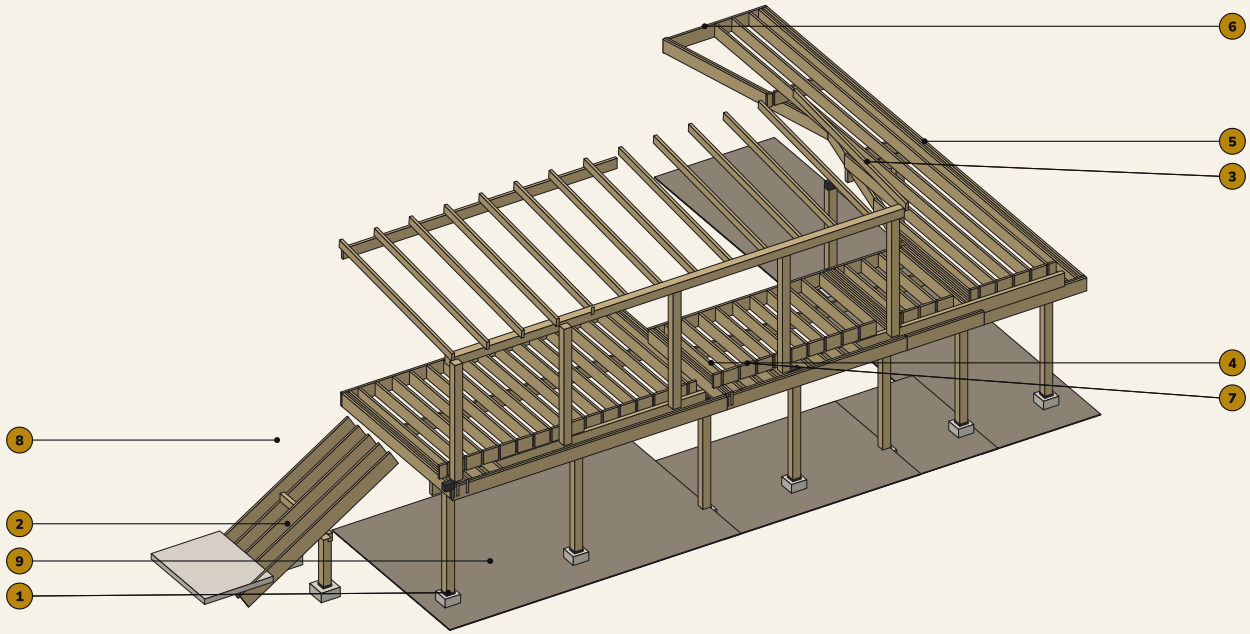

KEY

1. Diamond Pier DP-50/50 — head + 4 driven pins (frost-protected, no excavation)
2. 6x6 post on a ABA66Z standoff base
3. Beam
4. 2x10 joist
5. Rim
6. Ledger
7. Blocking
8. Stair
9. Gravel over 6-mil poly under the decks

Decking, rail and house removed to show the frame. Joists hang from the ledger in face-mount hangers, bear on the drop beam with H2.5AZ ties; double rims in concealed-flange hangers.

Axonometric · not to scale · the model the plans are drawn from


Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

A-101 DECKING PLAN

Every board, border and divider as it lays; rail posts shown for the pockets

1675 Summit Point Ct — Deck with Porch Cover · 1675 Summit Point Ct,...

October 22, 2026 · Rev 0 · PERMIT SET

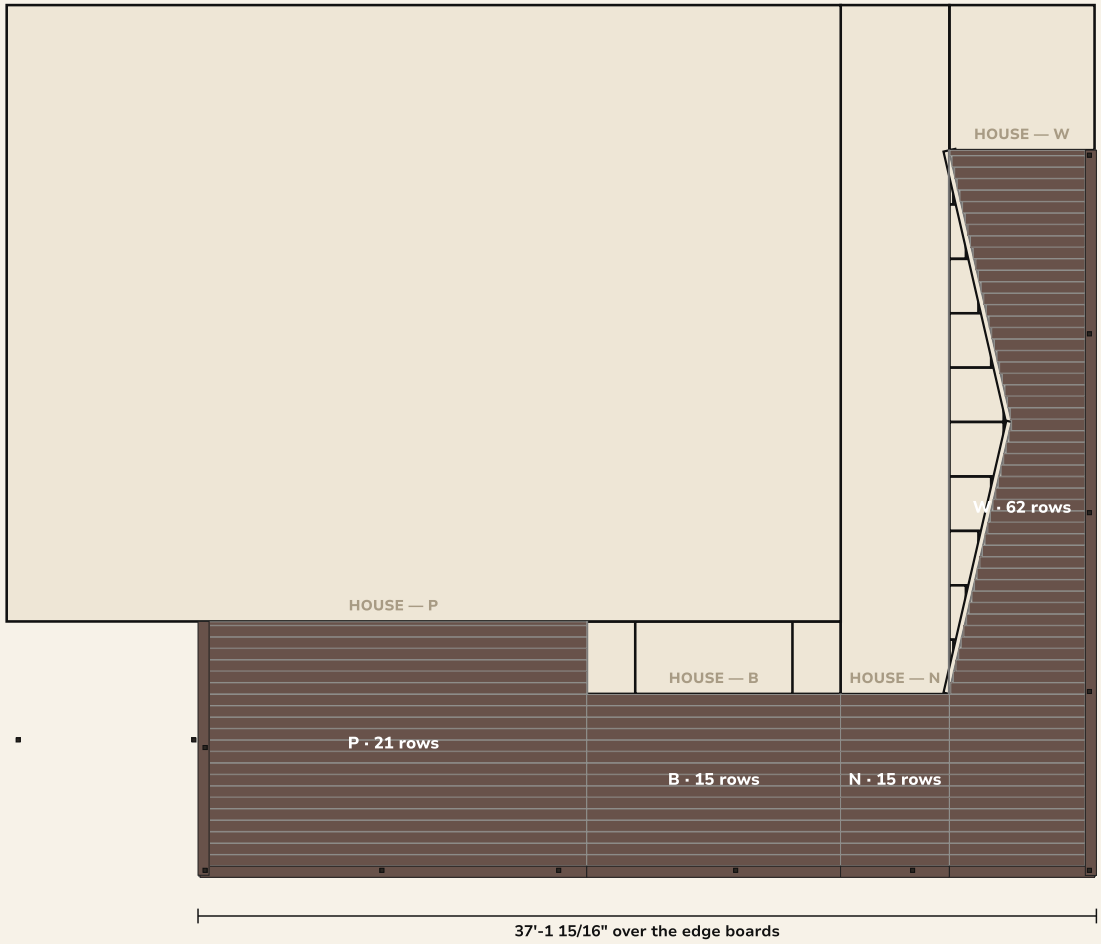

DECKING

Field: TimberTech Vintage English Walnut, 5.5" x 1", 3/16" gaps

Border: Vintage English Walnut

Boards run parallel to the house; edge overhang 1" over the fascia

Cortex face screws with color-matched plugs: 2 per board at every joist and at both ends of every run, color-matched plugs (2394 field + 124 border/divider)

Rows per zone: P 21 · B 15 · N 15 · W 62 (rip at the house)


Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.


A-201 RAILING PLAN + ELEVATION

Post IDs and types (E end · L line · C corner), bay lengths, outer-edge elevation

1675 Summit Point Ct — Deck with Porch Cover · 1675 Summit Point Ct,...

October 22, 2026 · Rev 0 · PERMIT SET

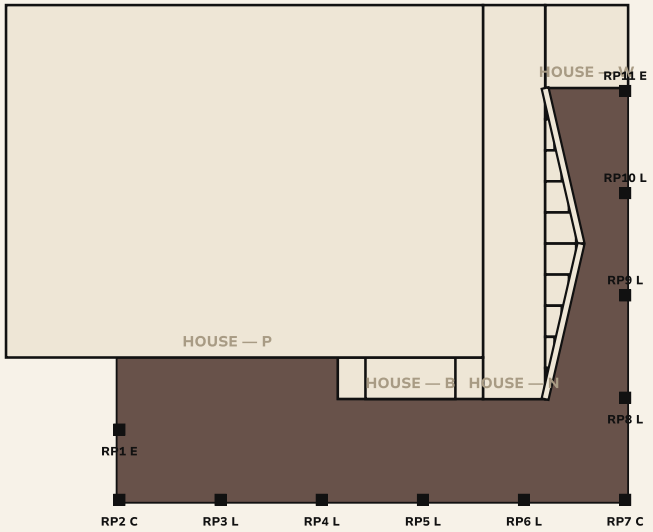

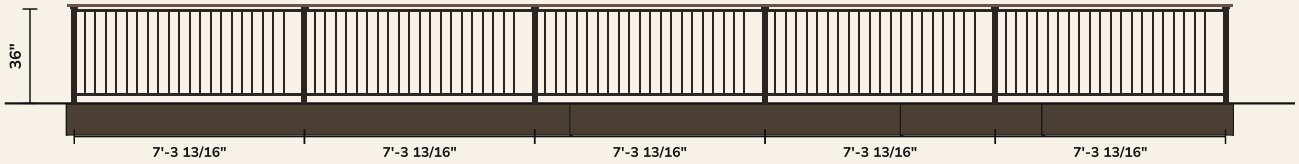

RAILING

Cinch 36" Satin Black: 10 bays, 11 posts, 72.5 LF + drink rail

Cinch 36" — 11 posts (2 CORNER, 2 END, 7 LINE) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post; drink rail board on Cinch drink-rail brackets, mitred at every turn

Bays: end:left 5'-1" · front:P+B+N+W 7'-3 13/16" · front:P+B+N+W 7'-3 13/16" · front:P+B+N+W 7'-3 13/16" · front:P+B+N+W 7'-3 13/16" · front:P+B+N+W 7'-3 13/16" · end:right 7'-4 3/4" · end:right 7'-4 3/4" ·

Guard 36" min above the deck; openings under 4" (IRC R312). Rail LF for labor = deck-edge LF of actual rail.

Plan above · elevation of the outer edge below

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.


A-202 ELEVATIONS

Front from the yard and both ends, drawn from the model — deck and roof-cover heights


1675 Summit Point Ct — Deck with Porch Cover · 1675 Summit Point Ct,...

October 22, 2026 · Rev 0 · PERMIT SET

FRONT ELEVATION — from the yard

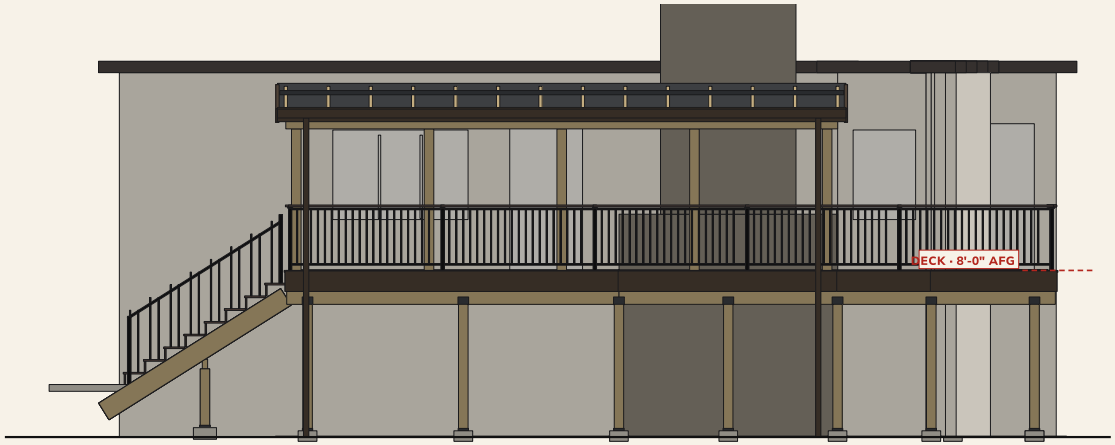


RIGHT END ELEVATION

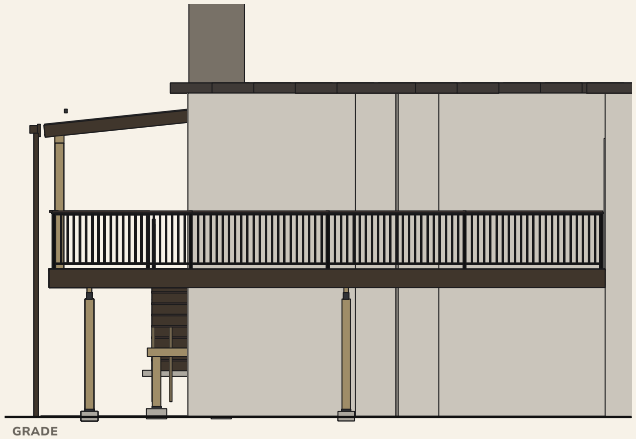

NOTES

· Deck surface 8'-0" above grade
· Heights AFG = above finished grade at the beam line; field-verify grade before setting the piers
· Clear heights are to the underside of the beam / ledger above the deck surface
· Roof covers: black standing seam on 2x8 rafters, Hardie fascia / rakes / soffit; slope to the yard
· Deck frame: 2x10 #1 True Frame GC @ 12" OC on a (2)2x10 SYP drop beam, 7 posts
· Guard 36" min. on every open side — the surface is 8'-0" above grade (IRC R312.1)

LEFT END ELEVATION

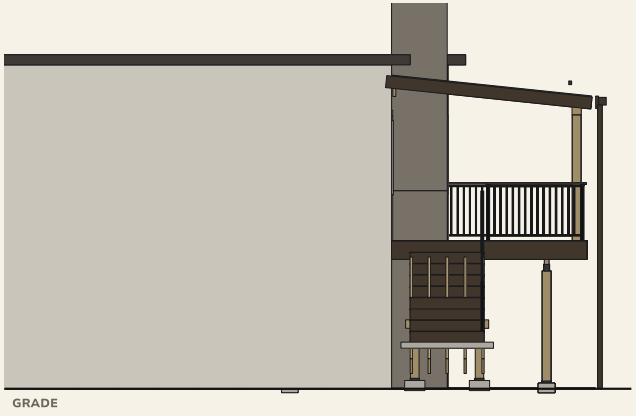

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

Main deck + porch cover · A-301 · Section + front elevation


A-301

SECTION + FRONT ELEVATION

Cut through the deepest zone; heights to grade, frost line, cantilever, guard

1675 Summit Point Ct — Deck with Porch Cover · 1675 Summit Point Ct,...

October 22, 2026 · Rev 0 · PERMIT SET

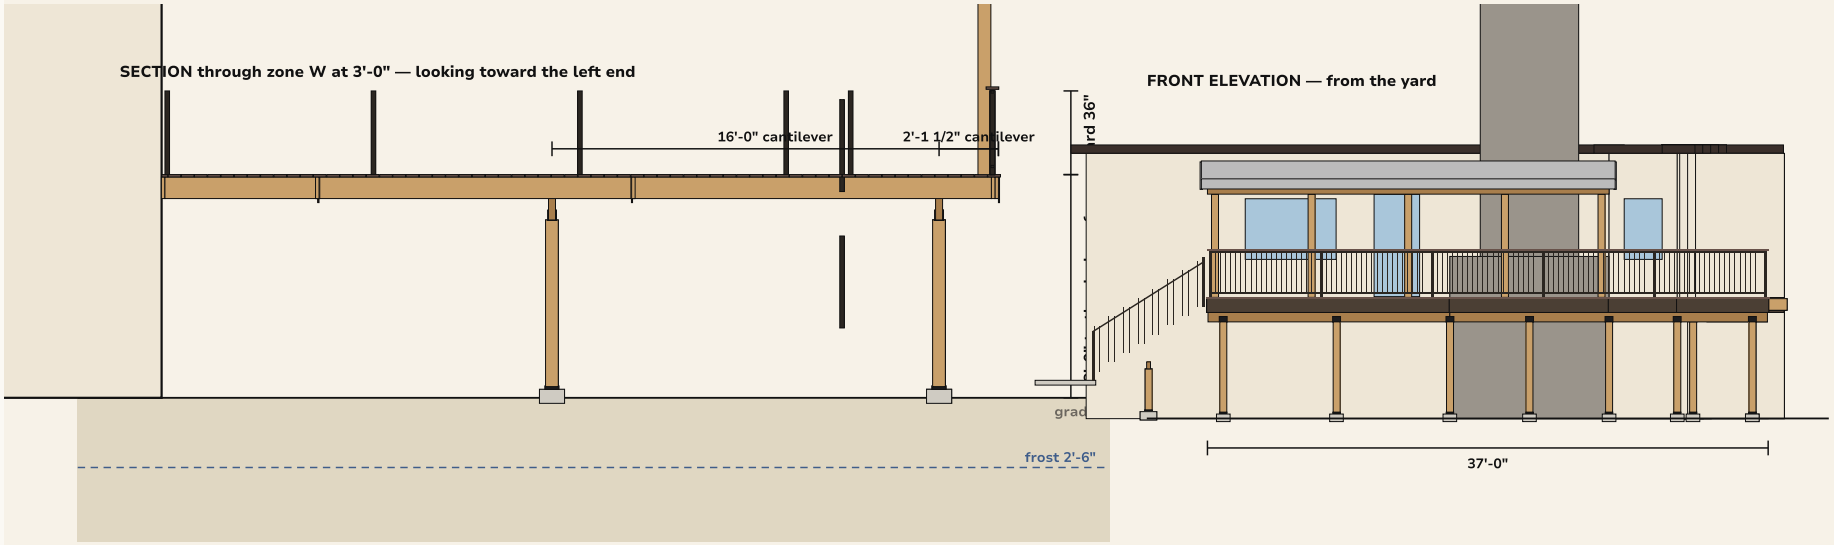

SECTION NOTES

Deck surface 8'-0" above grade; guard 36" where the drop exceeds 30"

DROP (2)2x10 SYP P+B+N+W: 36'-11", 7 posts at 1'-0 1/2" / 8'-6 1/4" / 16'-0" / 21'-3" / 26'-6" / 31'-0" / 35'-11 1/2" (worst 2,337 lb); DROP (2)2x10 SYP W: 5'-11", 2 posts at 32'-0 1/2" /

Posts 11 x 6x6 on DP-50/50

2x10 ledger x 37'-0" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 38 fasteners

G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)

Section left · elevation right · not to a common scale

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.


A-401 ROOF COVERS — PLAN + SECTION

Lean-to covers: ledger, rafters, beam, posts on the piers, clear heights, pitch, standing seam, Hardie, blinds


1675 Summit Point Ct — Deck with Porch Cover · 1675 Summit Point Ct,...

October 22, 2026 · Rev 0 · PERMIT SET

PORCH COVER — PLAN

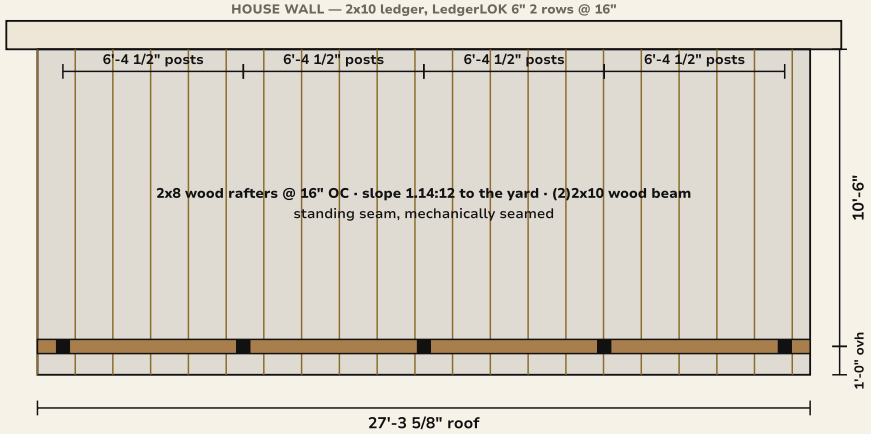

PORCH COVER — SECTION

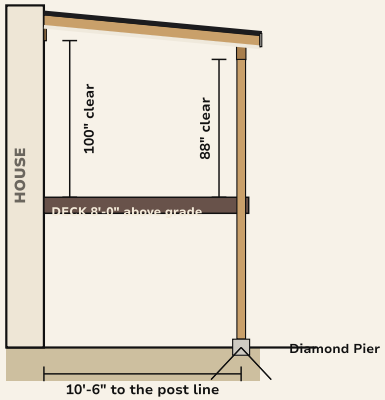

Standing seam 24 ga, 16" panels, 1-1/2" mechanical (double-lock) seam — rated for 1.14:12 · high-temp ice & water underlayment over 7/16" OSB
Headwall flashing counterflashed into the siding · color-matched eave / rake trim · snow bar across the low eave
HardieSoffit cedarmill ceiling · HardieTrim fascia + rakes (color TBD) · H2.5AZ at every rafter · post caps per D-503
6x6 cedar posts on ABA66Z bases on the Diamond Pier bolt · AC6Z cap to the (2)2x10 beam · the engineer's uplift hold-down governs

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

Main deck + porch cover · A-402 · Roof covers — exploded isometric, labeled


A-402

ROOF COVERS — EXPLODED ISOMETRIC, LABELED

Both lean-to covers pulled apart layer by layer

1675 Summit Point Ct — Deck with Porch Cover · 1675 Summit Point Ct,...

October 22, 2026 · Rev 0 · PERMIT SET

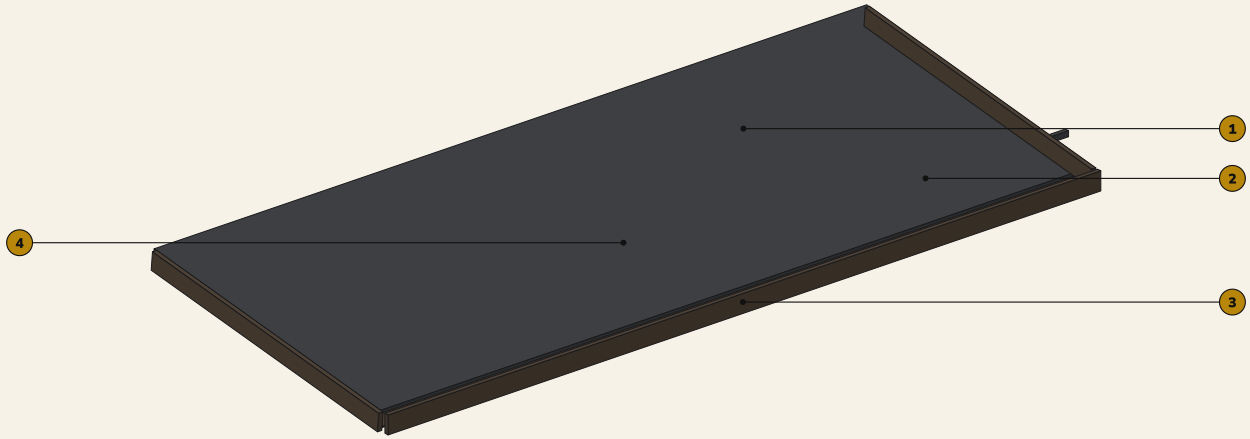

KEY

1. standing seam, 24 ga, mechanically seamed
2. Snow retention bar, clamped to the seams
3. HardieTrim fascia + rakes
4. HardieSoffit cedarmill ceiling

Lifts are for clarity only. Order of work: posts on ABA66Z bases, beams on their post caps, ledger on LedgerLOK, rafters with H2.5AZ, soffit, OSB, underlayment, panels, trims, snow bar.

Axonometric · not to scale · the model the plans are drawn from

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.


D-501 DETAILS

Ledger · post / beam / cap · footing · rail post · deck edge · the job's special condition

1675 Summit Point Ct — Deck with Porch Cover · 1675 Summit Point Ct,...


October 22, 2026 · Rev 0 · PERMIT SET

1 LEDGER AT THE HOUSE

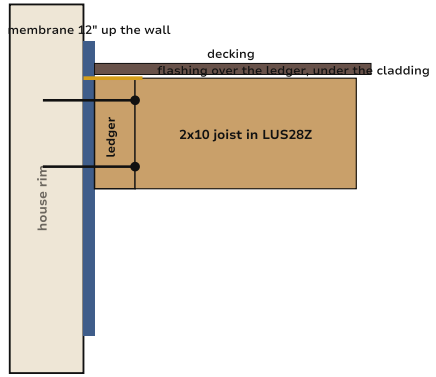


2x10 ledger x 37'-0" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 38 fasteners · 26 ga wall flashing (WUI)

2 POST · BEAM · CAP

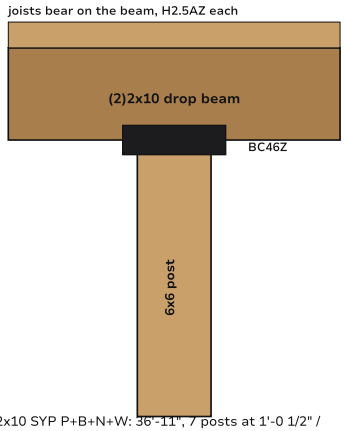


DROP (2)2x10 SYP P+B+N+W: 36'-11", 7 posts at 1'-0 1/2" / 8'-6 1/4" / 16'-0" / 21'-3" / 26'-6" / 31'-0" / 35'-11
1/2" (worst 2,337 lb); DROP (2)2x10 S

3 FOOTING · POST BASE

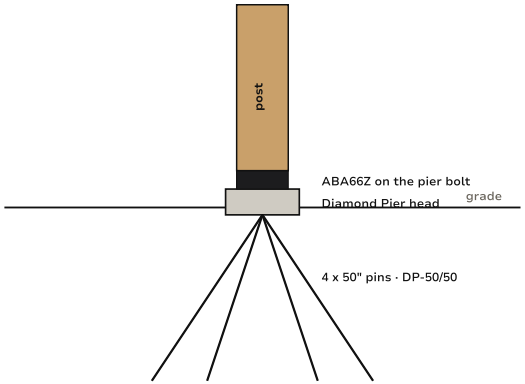


4 RAIL POST · GUARD

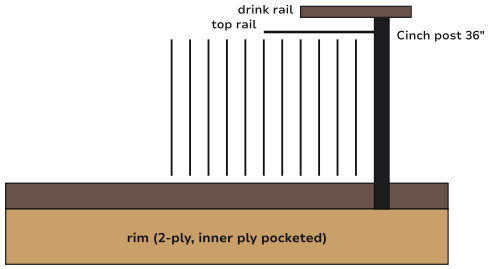

Cinch 36" — 11 posts (2 CORNER, 2 END, 7 LINE) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post; drink rail board on Cinch drink-rail brackets, mitred at every turn

5 DECK EDGE · BORDER

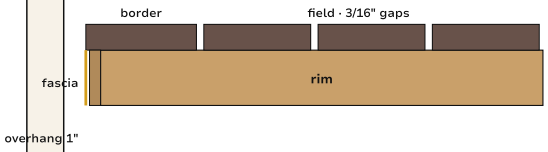

Cortex face screws with color-matched plugs: 2 per board at every joist and at both ends of every run, color-matched plugs (2394 field + 124 border/divider)

6 BLOCKING

Blocking one row over the beam, staggered up and down so every block can be end-nailed.


D-502 CONNECTION DETAILS — FRAME

Ledger · hangers · joists on the beam · (2)2x10 on the cap · pier + base · knee braces


1675 Summit Point Ct — Deck with Porch Cover · 1675 Summit Point Ct,...

October 22, 2026 · Rev 0 · PERMIT SET


1 LEDGER AT THE HOUSE — SECTION

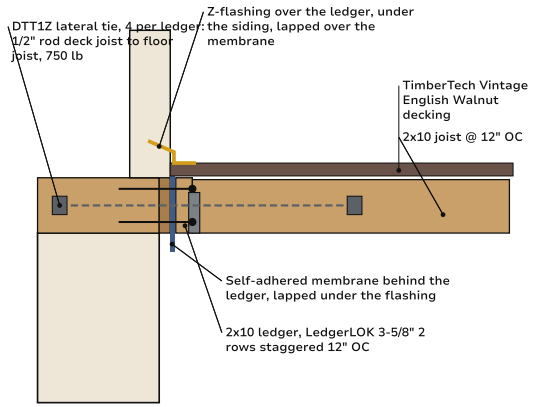

2 HANGERS — PLAN AT THE LEDGER + SIDE RIM

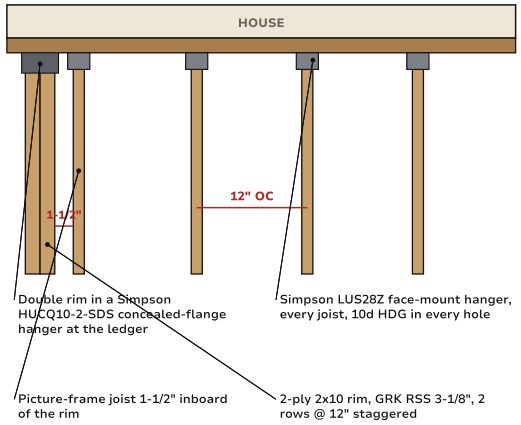


3 JOISTS ON THE DROP BEAM — SECTION

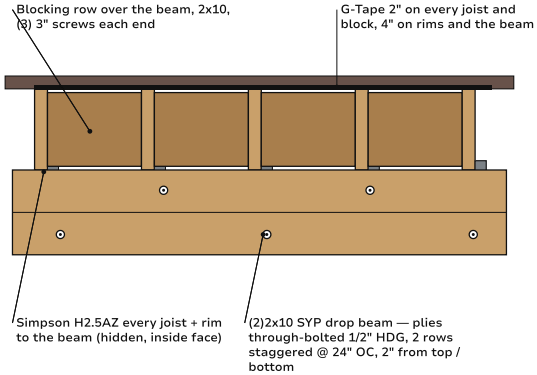


Joists bear the full beam width

Cantilever 2'-1 1/2" past the beam — over L/4: engineer

4 (2)2x10 BEAM ON THE 6x6 — ELEVATION

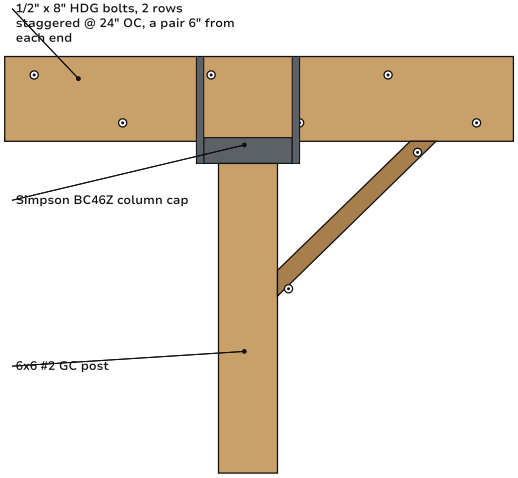

5 POST BASE ON THE DIAMOND PIER — SECTION

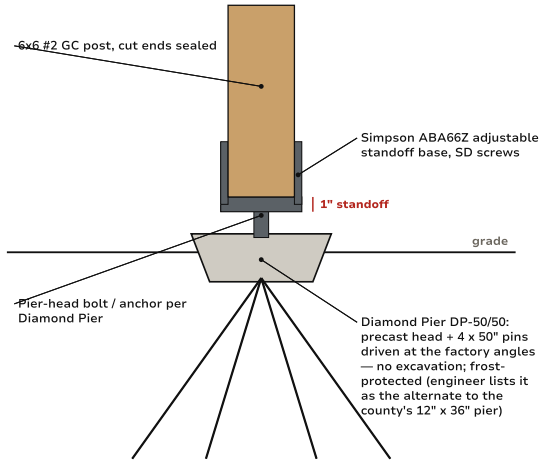

6 POST HEIGHT


D-504 CONNECTION DETAILS — DECK EDGE, RAIL, LATERAL

Rail post mounting · picture frame + fascia · guard bay · DTT1Z lateral ties · joist tape · fastening schedule


1675 Summit Point Ct — Deck with Porch Cover · 1675 Summit Point Ct,...

October 22, 2026 · Rev 0 · PERMIT SET


1 RAIL POST AT THE RIM

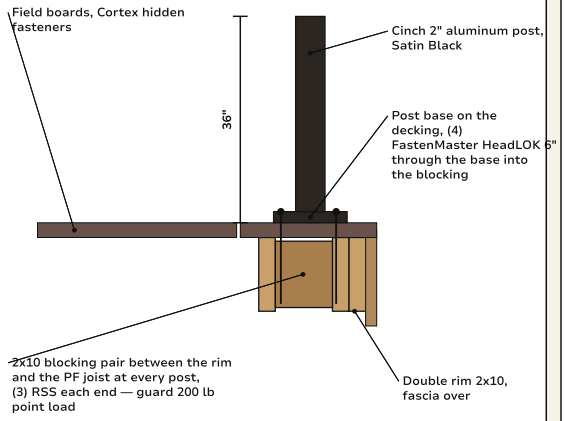

2 DECK EDGE — PICTURE FRAME + FASCIA

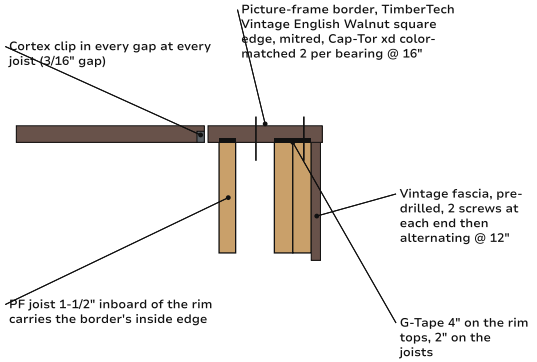


3 GUARD — ONE BAY, ELEVATION

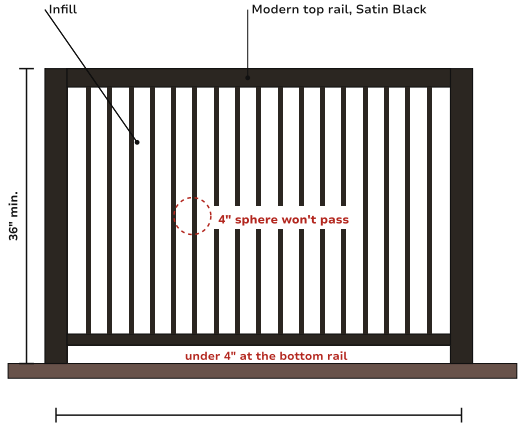


Guard: 200 lb point load at the top, 50 lb on 1 SF of infill (IRC Table R301.5) — submit the rail code report

4 LATERAL LOAD — DTT1Z TIES (PLAN)

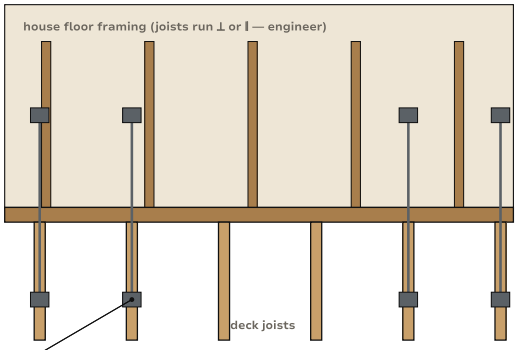

(4) Simpson DTT1Z, 2 near each end of the ledger: 1/2" threaded rod through the ledger and the band into a floor joist (or blocking) inside — 750 lb each (IRC R507.9.2)

5 JOIST TAPE + BLOCKING

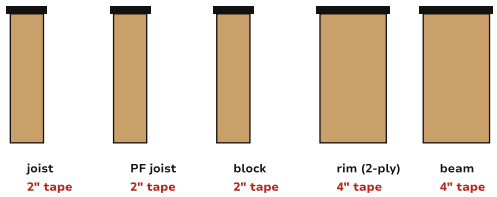

Nichigo G-Tape 3035 (black) on every top edge before decking, lapped over the ends and down the sides 1/2"; one row of 2x10 blocking over the beam, (3) structural screws each

6 FASTENING SCHEDULE

Ledger to house	LedgerLOK 3-5/8", 2 rows staggered 12" OC
Lateral	(4) DTT1Z, 1/2" rod into the floor framing
Joist to ledger	LUS28Z, 10d HDG every hole
Rim to ledger	HUCQ10-2-SDS, SDS screws
Rim plies	GRK RSS 3-1/8", 2 rows @ 12" staggered
Joist to beam	H2.5AZ each joist + rim, 10d x 1-1/2"
Beam plies	1/2" x 8" HDG bolts, 2 rows staggered @ 24"
Beam to post	BC46Z cap, SDS screws
Post to pier	ABA66Z on the Diamond Pier, SD screws
Blocking	(3) structural screws each end
Field boards	Cortex, every joist, every gap
Borders / fascia	Cap-Tor xd color-matched, pre-drilled
Rail posts	(2) 7/16" bolts per post

Main deck + porch cover



From the yard




From the front corner



Isometric



Isometric — opposite corner

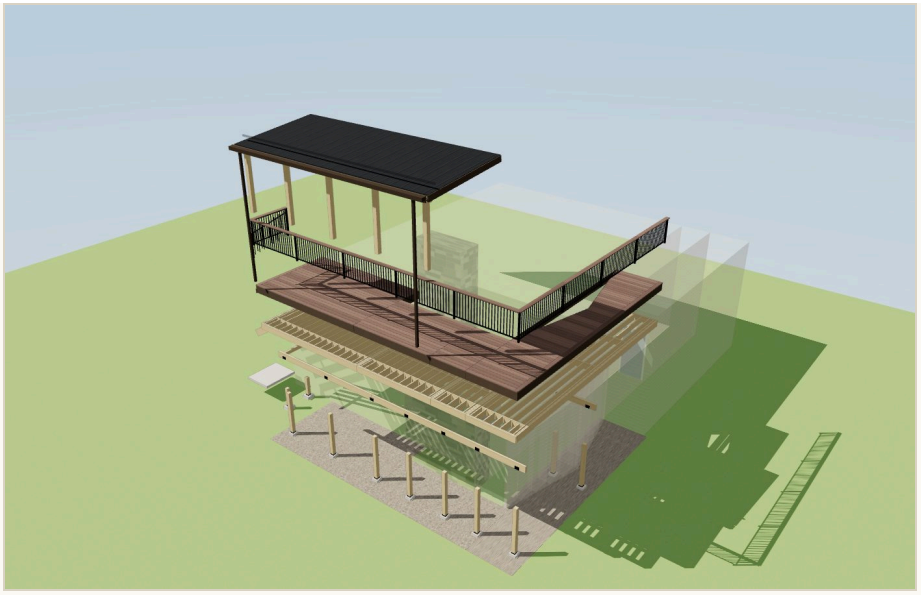

Exploded — every layer



Exploded — from the corner



Structure from below



Under the deck



Plan view from above