

# 16 x 14 Deck

Prepared for the owner · CO · September 30, 2026

| CHECK OR ACH    | FINANCED                         | MONTHLY                          |
|-----------------|----------------------------------|----------------------------------|
| <b>\$23,376</b> | <b>\$25,135</b><br>no money down | <b>\$292</b><br>6.99% · 10 years |



The old deck comes out and a new 16' x 14' deck goes in its place, ledgered to the house and carried on a 4x10 Douglas fir beam and four Diamond Pier foundations. TimberTech Prime+ composite decking in Sea Salt Gray with a single picture frame in the same board and hidden fasteners in the field. TimberTech Fulton black steel rail on the three open sides, and a new 5' wide stair down to the existing concrete pad.

AT A GLANCE



From the yard



Isometric from the open corner

- Deck** 220 SF · 2'-4" above grade · 15'-11 1/8" x 13'-10 1/16" over fascia
- Decking** TimberTech Prime+ Sea Salt Gray, picture frame in Prime+ Sea Salt Gray · Camo EdgeClip fasteners
- Rail** TimberTech Fulton Black, 36" · 38 LF
- Stair** 4 risers at 7.0", 5'-0" wide
- Structure** 2x10 pressure-treated frame at 16" on centre, 4x10 Douglas fir beams; 4 x 6x6 on DP-50/50
- Design load** 50 psf (40 psf live governs)


WHAT IT IS included in the price

ELEMENT SELECTION

|             |                                                                                                                                                                                               |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Decking     | TimberTech Composite Prime+, Sea Salt Gray; picture frame in Prime+ Sea Salt Gray. Grooved boards, 3/16" gaps, matching fascia. Not rated for fire zones; 25-yr product / 25-yr fade & stain. |
| Railing     | TimberTech Fulton Rail, Black, 36". 38 LF.                                                                                                                                                    |
| Frame       | 13 2x10 #1 True Frame Joist SYP GC @ 16" OC x 13'-4 1/2"; 2-ply 2x10 front and sides; 4x10 Douglas fir beams.                                                                                 |
| Foundation  | DP-50/50.                                                                                                                                                                                     |
| Design load | 30 psf snow.                                                                                                                                                                                  |
| Hardware    | Simpson ZMAX galvanized connectors. Camo EdgeClip fasteners.                                                                                                                                  |




From the front corner

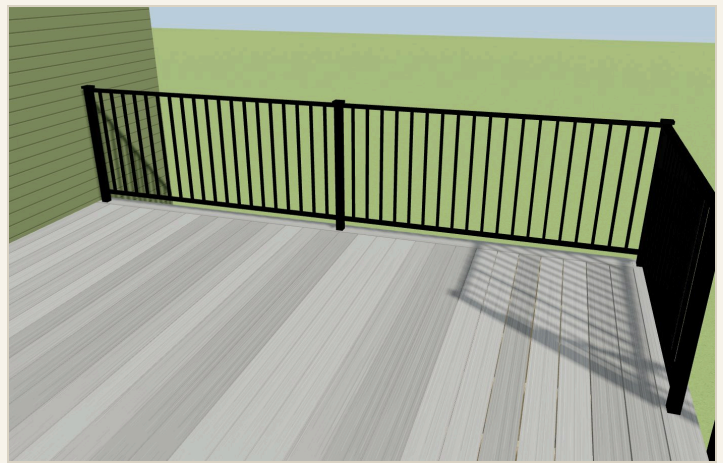

Standing on the deck



Low isometric

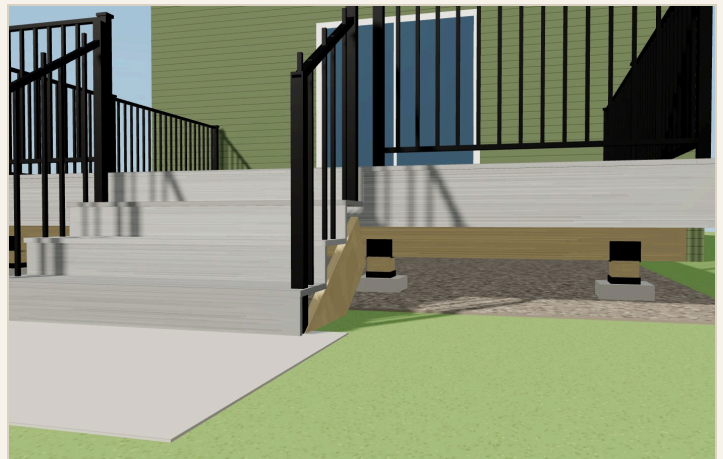


Under the deck — posts, beams, footings




Isometric from the stair corner



Isometric from the open corner

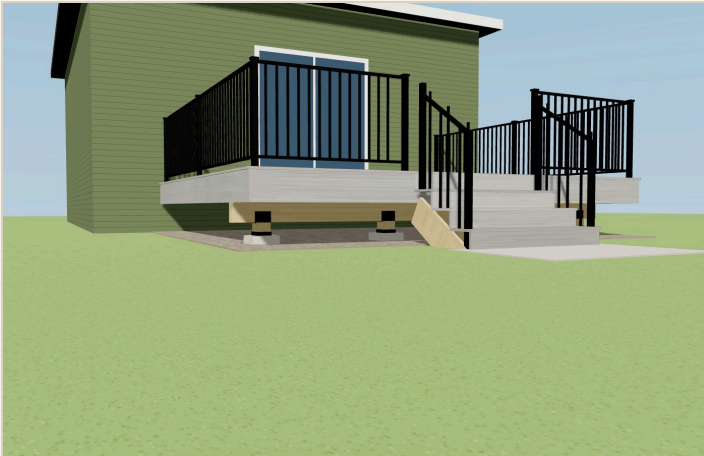

Isometric from under the frame

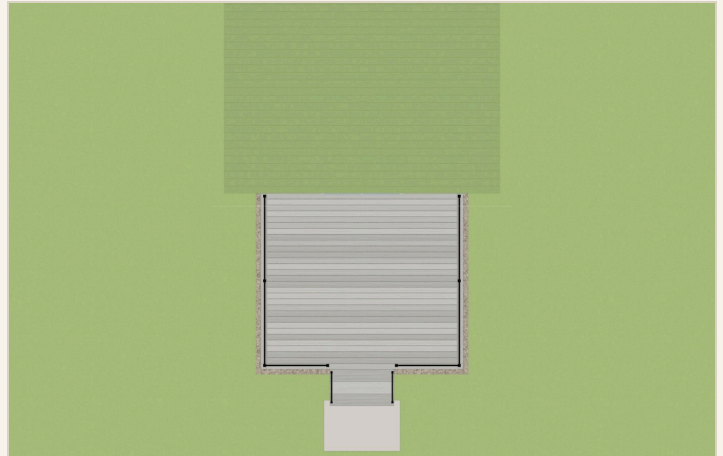

Plan from above


## EXPLODED VIEWS every layer pulled apart



Exploded — every layer




Exploded — from the open corner

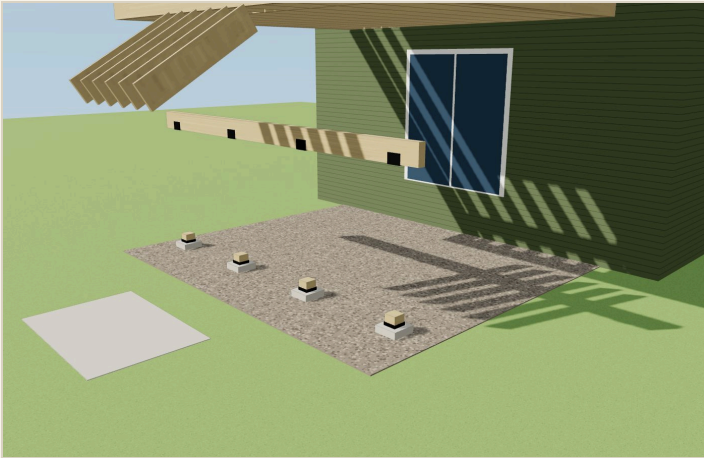


Exploded — from the front corner



Exploded — low angle

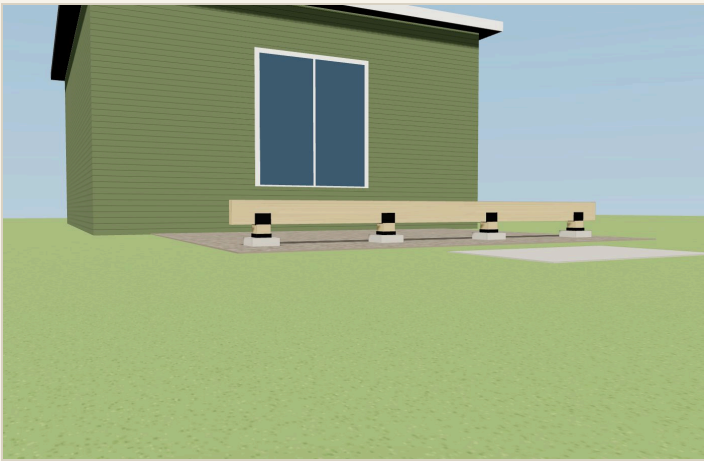

Posts and beams on the footings

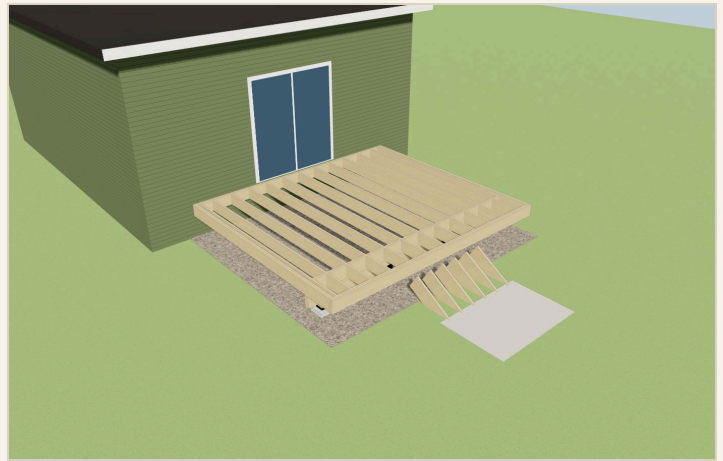

Frame only — joists, rims, beams, ledger



PRICE

**Total investment \$25,135** — financed, no money down

- 12 months no payments, no down payment
- 18 months no payments, no down payment
- 6.99% for 10 years — about \$292/month

**Check or ACH: \$23,376** (7% savings)

WHAT THE PRICE INCLUDES

| ITEM                       | VALUE           |
|----------------------------|-----------------|
| Demolition & haul-off      | \$664           |
| Foundation & structure     | \$8,855         |
| Decking & fascia           | \$6,780         |
| Railing                    | \$3,649         |
| Stairs                     | \$2,548         |
| Site & project services    | \$880           |
| <b>Total, check or ACH</b> | <b>\$23,376</b> |
| <b>Total, financed</b>     | <b>\$25,135</b> |

NEXT STEP

This is a fixed-price proposal on the selections above. Check or ACH, or financed with approved credit. Numbers hold 30 days.



The interactive 3D model lives at the online version of this document.

---

GS Exterior Experts · Deck Division

Renders and drawings are design intent; dimensions on the sheets govern. Numbers hold 30 days.