GS EXTERIOR EXPERTS · DECK DIVISION · PERMIT SET

281 S Jefferson Ave · Decks + Roof Covers

281 S Jefferson Ave, Louisville · two decks (12' x 12' + 14'8" x 3'8" walkway) on CEMCO steel and Diamond Piers · TimberTech Landmark American Walnut, picture frame + dividers, no butt joints · two lean-to covers, black standing seam, Hardie soffit / fascia / rakes · blinds kept · October 16, 2026

SHEET INDEX

1. Decks + roof covers · **G-001** General notes · design criteria
2. Decks + roof covers · **C-100** Site plan
3. Decks + roof covers · **A-002** Isometric — assembled, labeled
4. Decks + roof covers · **A-003** Isometric — exploded, labeled
5. Decks + roof covers · **S-100** Foundation plan
6. Decks + roof covers · **S-101** Framing plan
7. Decks + roof covers · **S-102** Structure isometric, labeled
8. Decks + roof covers · **A-101** Decking plan
9. Decks + roof covers · **A-202** Elevations
10. Decks + roof covers · **A-301** Section + front elevation
11. Decks + roof covers · **A-401** Roof covers — plan + section
12. Decks + roof covers · **A-402** Roof covers — exploded isometric, labeled
13. Decks + roof covers · **D-501** Details
14. Decks + roof covers · **D-502** Connection details — steel frame
15. Decks + roof covers · **D-503** Connection details — roof covers

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale. This set carries no pricing.

G-001 GENERAL NOTES · DESIGN CRITERIA

Loads, codes, structure summary, sheet index, site — the permit-set cover

281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...

GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 · PERMIT SET

PROJECT

281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel, TimberTech Landmark American Walnut)
281 S Jefferson Ave, Louisville CO 80027
197.8 SF · 1'-3" above grade · 2 zones

DESIGN CRITERIA

Deck live load	40 psf uniform (IRC Table R301.5); guards 200 lb concentrated / 50 plf
Ground snow	30 psf (ground; deck design uses the larger of snow and live) — 40 psf live governs; ground snow per the ASCE hazard tool (Louisville criteria) — 30 psf used here (city sheet, non-reducible); Boulder County layer shows 40 psf: engineer confirms
Dead load	10 psf deck · 15 psf porch cover (standing seam steel on sheathing, Hardie soffit; 12 psf actual, 15 used) carried on the deck posts
Roof snow (cover)	30 psf flat-roof design snow, sliding snow off the house roof + drift at the house wall per ASCE 7 Ch. 7
Design total	50 psf on the deck · cover posts add roof snow + dead to the deck frame and footings (engineered)
Wind	145 mph Vult (3-second gust), Exposure C (Louisville 2024 design criteria), Risk Cat. II
Frost depth	3'-0" (footings bear below)
Soil bearing	1,500 psf presumptive (IRC R401.4.1) — no soils report
Seismic	B
Wildfire (WUI)	not in a WUI zone
Codes	2024 IRC / IBC as adopted and amended by the City of Louisville (Ord. 1907, Series 2025); IRC R507 decks with LMC 15.05.140; IBC Appendix I patio covers; ASCE 7-22 loads; Louisville Fire Hardening provisions; cold-formed steel frame per AISI S240, engineered
Engineering	Stamped structural set by a Colorado PE required — the stamped set governs

STRUCTURE

Footings	DP-50/50
Posts	2 x 3x3 galvanized steel post stubs + 5 cover posts carrying the deck beam
Beams	FLUSH boxed 7-1/4" steel C W: 14'-2", 4 posts at 7 3/16" / 3'-0" / 8'-4" / 14'-1 3/16" (worst 474 lb); FLUSH boxed 7-1/4" steel C M: 11'-6", 3 posts at 15'-2" / 20'-8" / 26'-2" (worst 1,616
Joists	7-1/4" CEMCO cold-formed steel C-joists, 16 ga G90, @ 12" OC
Rims	single-ply 7-1/4" steel track rims and ledger track on a steel angle
Ledger	7-1/4" steel ledger track + 3x3 ledger angle, 1/4" structural screws 2 rows staggered 16" OC into the rim board (engineer confirms) · flashing and membrane as for wood
Decking	TimberTech Landmark American Walnut — 25 rows parallel to the house, picture frame & dividers in Landmark American Walnut, 3/16" gaps, CONCEALoc
Rail	none

SHEET INDEX

G-001	General notes · design criteria
C-100	Site plan
A-001	Isometric · renders
A-002	Isometric — assembled, labeled
A-003	Isometric — exploded, labeled
S-100	Foundation plan
S-101	Framing plan
S-102	Structure isometric, labeled
A-101	Decking plan
A-202	Elevations
A-301	Section + front elevation
A-401	Roof covers — plan + section
A-402	Roof covers — exploded isometric
D-501	Details
D-502	Connection details — steel frame
D-503	Connection details — roof covers

SITE


Rear / front lot line: deck edge 12.0' from the line, setback per the PUD...
Side lot line: deck edge 9.8' from the line, setback per the PUD —...

C-100 SITE PLAN

Parcel, existing house, new decks and roof covers, distances to the lot lines, coverage

281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...

GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 · PERMIT SET

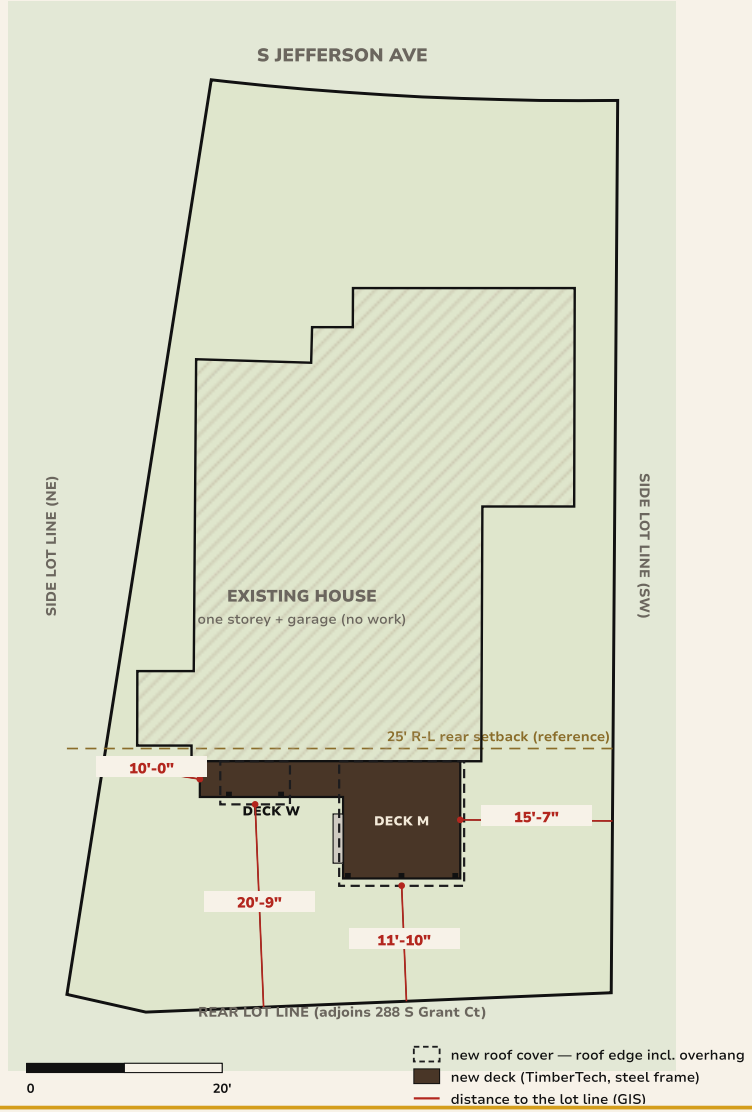

PARCEL

281 S Jefferson Ave, Louisville CO 80027
Parcel 157517119033 · Account R0092293
Lot 33, Block 10, Dutch Creek (plat rec. 00492001, 1982)
Section 17, T1S, R69W
Zoning: R-L within the Dutch Creek PUD (approved 12/15/1981)
Lot 4,678 SF · flood zone X
House 1982 one-storey ranch: 920 SF main floor + 400 SF garage (assessor)

LOT COVERAGE

Lot area	4,678 SF
House + garage (assessor footprint)	1,320 SF
Existing covers to the posts (2024 aerial, est.)	~142 SF (main ~12' x 10'-4", walkway ~5'-4" x 3'-5")
Existing coverage	~1,462 SF · 31.3%
Main cover, new (to the posts) 12'-0" x 11'-9"	141 SF
Walkway cover, new (to the posts) 5'-4" x 3'-5"	18 SF
Proposed coverage	~1,479 SF · 31.6% (+~17 SF)
Uncovered decks	not counted (under 30" above grade)

SETBACKS

Decks are 30" or less above grade — not held to the principal setbacks (city deck handout)
Roof covers: part of the principal structure — they replace the two existing covers in place; the 2024 aerial shows the existing main roof ~1'-5" shallower: field-verify the existing post line
R-L reference setbacks (LMC 17.12.040) — the Dutch Creek PUD plan governs; Planning to confirm
Measured (red): to the nearest lot line from the new work — GIS, not survey

SITE WORK

· Remove the two decks, the two roof covers and the box step; haul off
· Diamond Pier foundations (no excavation spoils), 6-mil poly + 2" gravel under the decks
· Stair lands on grade (no pad)
· Roof drainage: covers shed to grade at the low eave, away from the house
· Call 811 before the piers; protect the lawn and the owner's blinds


Boulder County GIS parcel + 2024 Pictometry roof outline, Louisville GIS zoning / PUD layers. GIS lines are not a survey — an ILC governs if Planning requires one.

A-002 ISOMETRIC — ASSEMBLED, LABELED

Everything you see called out: piers, decking, picture frame, skirt, stair, roof covers, finishes

281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...

GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 · PERMIT SET

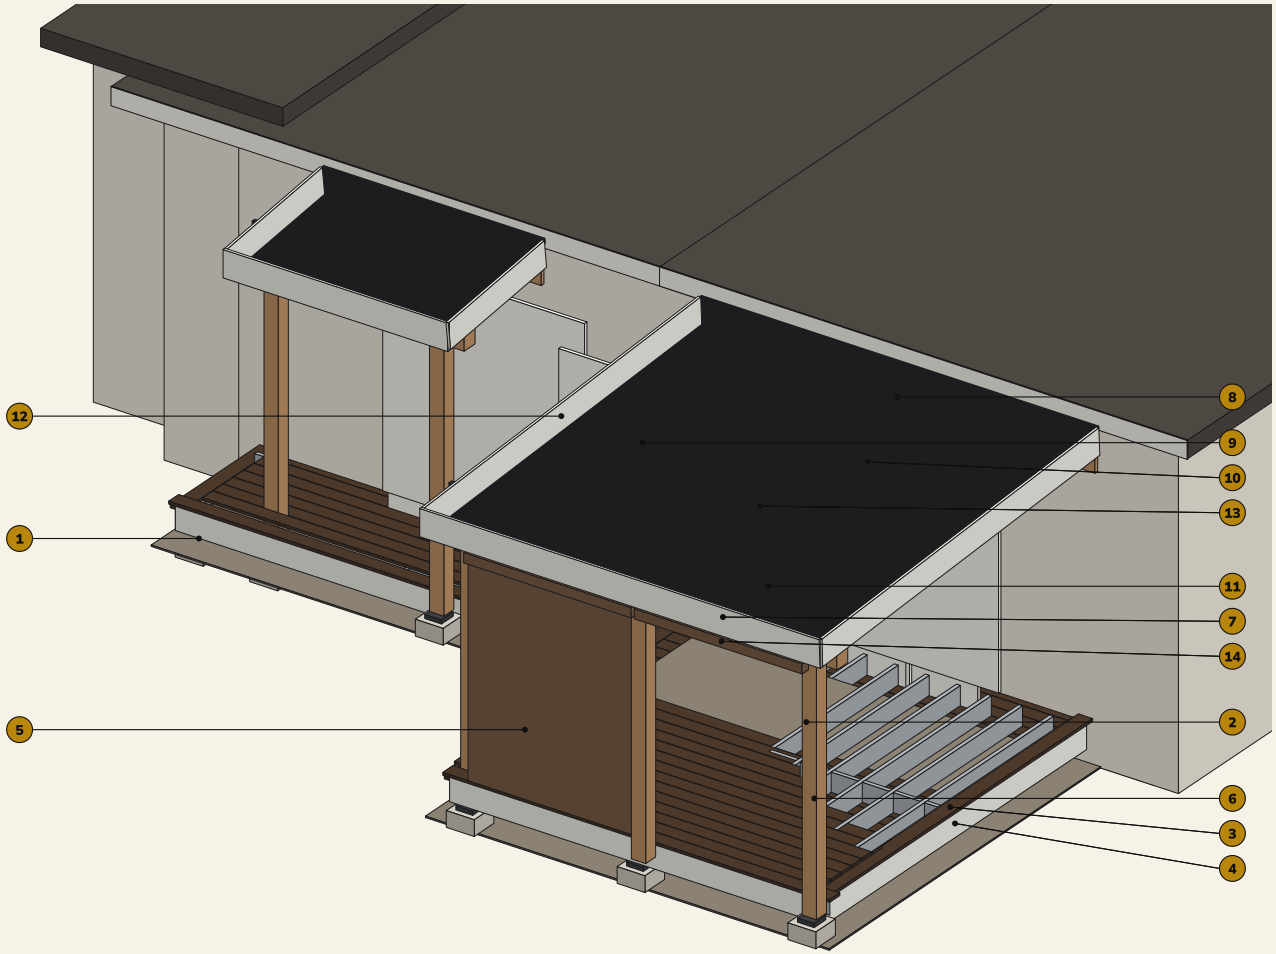

KEY

1. Diamond Pier DP-50/50 — head + 4 driven pins (frost-protected, no excavation)
2. TimberTech Landmark American Walnut field decking, hidden fasteners
3. Picture frame + breaker boards — TimberTech Landmark American Walnut
4. HardieTrim skirt Arctic White
5. Stair — steel stringers, Landmark treads, closed risers, lands on grade
6. 6x6 Douglas fir #1 cover post on ABA66Z (shared Diamond Pier)
7. (2)2x8 cover beam, wood, AC6Z cap
8. 2x8 cover ledger, wood, LedgerLOK 6" 2 rows, headwall flashed
9. 2x8 rafters @ 16" OC, wood, H2.5AZ at the beam
10. Black standing seam, 24 ga, mechanically seamed
11. Snow retention bar, clamped to the seams
12. HardieTrim fascia + rakes Arctic White
13. HardieSoffit cedarmill ceiling Arctic White
14. Existing roll-down blinds (stay)

House shown for context only (no work). The CEMCO steel deck frame under the decking is called out on S-102 and A-003; cover framing is wood (2x8 rafters, (2)2x8 beams, 6x6 Douglas fir posts).

Axonometric · not to scale · the model the plans are drawn from


Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

A-003 ISOMETRIC — EXPLODED, LABELED

Each build layer lifted in order: piers · posts · beams · frame · decking · stair · roof covers layer by layer

281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...

GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 · PERMIT SET

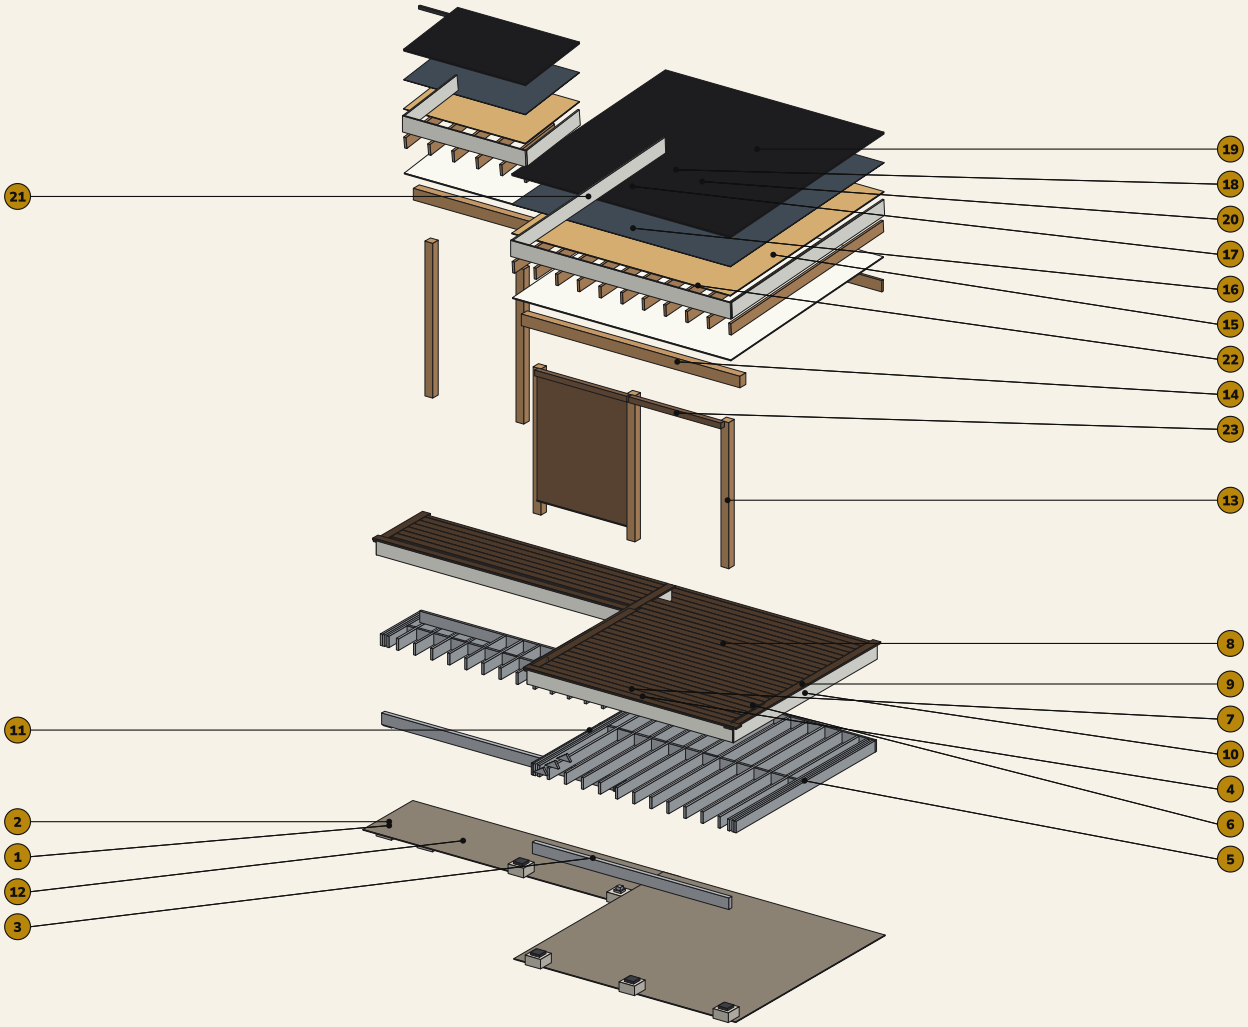

KEY

1. Diamond Pier DP-50/50 — head + 4 driven pins (frost-protected, no excavation)
2. 3x3 galvanized HSS post stub on a pier-head bracket
3. Boxed CEMCO 7-1/4" steel C beam (2 C toe-to-toe), flush
4. CEMCO 7-1/4" steel C-joist, 16 ga G90, @ 12" OC — clip angles each end
5. CEMCO 7-1/4" steel track rim (caps the joist ends)
6. Steel ledger track + 3x3 ledger angle on the house rim, flashed
7. Steel blocking at the breaker / picture-frame joists
8. TimberTech Landmark American Walnut field decking, hidden fasteners
9. Picture frame + breaker boards — TimberTech Landmark American Walnut
10. HardieTrim skirt Arctic White
11. Stair — steel stringers, Landmark treads, closed risers, lands on grade
12. Gravel over 6-mil poly under the decks
13. 6x6 Douglas fir #1 cover post on ABA66Z (shared Diamond Pier)
14. (2)2x8 cover beam, wood, AC6Z cap
15. 2x8 cover ledger, wood, LedgerLOK 6" 2 rows, headwall flashed
16. 2x8 rafters @ 16" OC, wood, H2.5AZ at the beam
17. 7/16" OSB roof sheathing
18. High-temp self-adhered underlayment
19. Black standing seam, 24 ga, mechanically seamed
20. Snow retention bar, clamped to the seams
21. HardieTrim fascia + rakes Arctic White
22. HardieSoffit cedarmill ceiling Arctic White
23. Existing roll-down blinds (stay)

Layers lifted in build order. Roof covers pulled apart: posts, beam + ledger, rafters, soffit, sheathing, underlayment, standing seam, snow bar, Hardie trim.

Axonometric · not to scale · the model the plans are drawn from


Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

S-100 FOUNDATION PLAN

Footings, posts and beam lines with the footing schedule; beams dashed (below the joists)

281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...

GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 · PERMIT SET

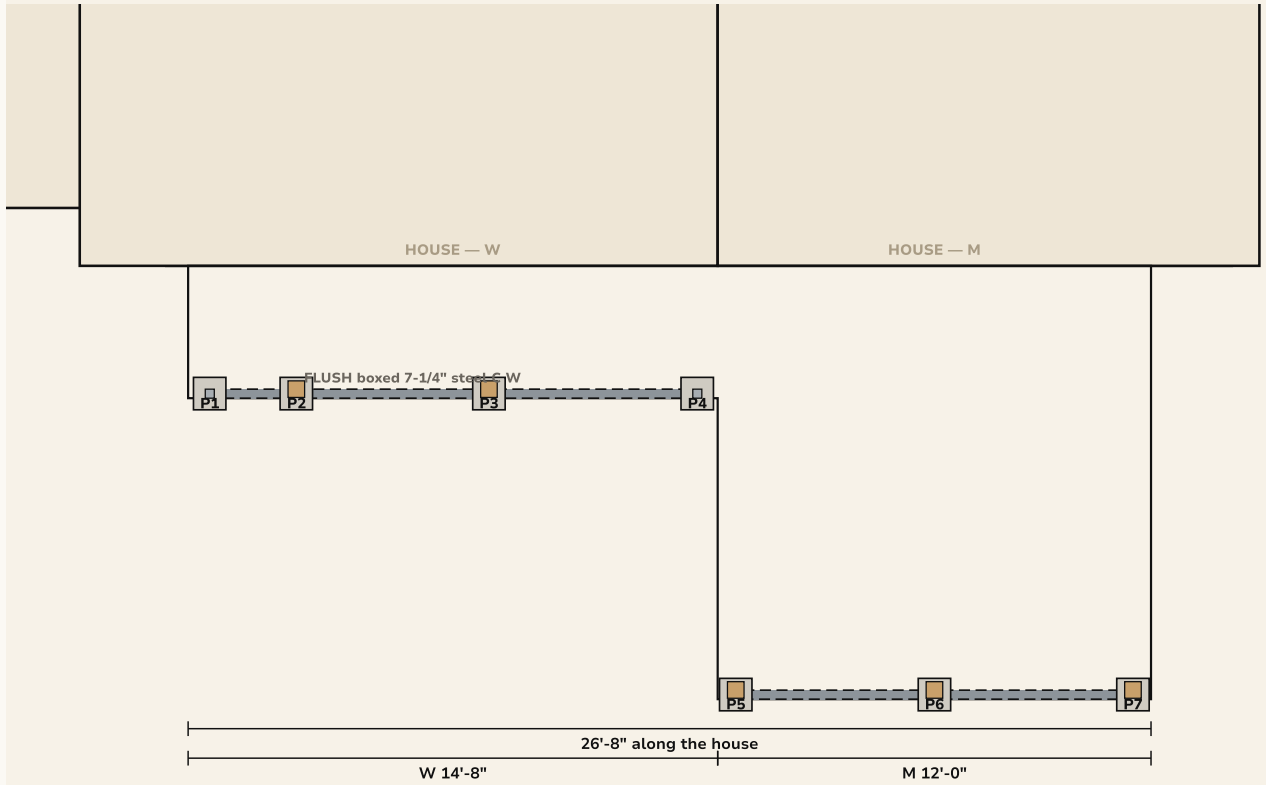

FOOTING SCHEDULE

Diamond Pier DP-50/50 (head + 4 x 50" pins), 3,300 lb allowable

ID	X	Y	ZONE	LOAD
P1	7 3/16"	3'-6 1/2"	W	132 lb
P2	3'-0"	3'-6 1/2"	W +cover	330 lb +roof
P3	8'-4"	3'-6 1/2"	W +cover	474 lb +roof
P4	14'-1 3/16"	3'-6 1/2"	W	273 lb
P5	15'-2"	11'-10 1/2"	M +cover	881 lb +roof
P6	20'-8"	11'-10 1/2"	M +cover	1,616 lb +roof
P7	26'-2"	11'-10 1/2"	M +cover	881 lb +roof

x from the left frame face facing the house; y from the reference wall.
Frost 3'-0" · soil 1,500 psf · worst post 1,616 lb

Deck-only piers: 3x3 galvanized HSS stub on a pier-head bracket (D-502 / 3).
+cover: the 6x6 Douglas fir roof-cover post stands on this pier (ABA66Z) and carries the deck beam on a steel side bracket (D-502 / 4); roof load adds — the engineer sizes the pier.
Beams: boxed CEMCO 7-1/4" steel C, flush (D-502 / 2).

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

S-101 FRAMING PLAN

Ledger, joists, rims, blocking, beams; every member in the model — the cut list is on T-600

281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...

GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 · PERMIT SET



FRAMING NOTES

7-1/4" CEMCO cold-formed steel C-joists, 16 ga G90, @ 12" OC

single-ply 7-1/4" steel track rims and ledger track on a steel angle

7-1/4" steel ledger track + 3x3 ledger angle, 1/4" structural screws 2 rows staggered 16" OC into the rim board

blocking one row over the beam, staggered

FLUSH boxed 7-1/4" steel C W: 14'-2", 4 posts at 7 3/16" / 3'-0" / 8'-4" / 14'-1 3/16" (worst 474 lb); FLUSH boxed 7-1/4"

Connectors:

Steel clip angle 1-1/2" x 1-1/2" x 7" 16 ga G90 — joist to track / beam: 56

Lateral-load tension tie for steel joists (Simpson DTT2Z w/ steel-joist kit or the engineer's detail) — IRC R507.9.2

Cold-galvanizing spray (cut ends, field drilling): 2


Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

S-102 STRUCTURE ISOMETRIC — STEEL FRAME, LABELED

Piers, stubs, cover posts at the shared piers, boxed beams, C-joists, track rims, ledger track, blocking

281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...

GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 · PERMIT SET

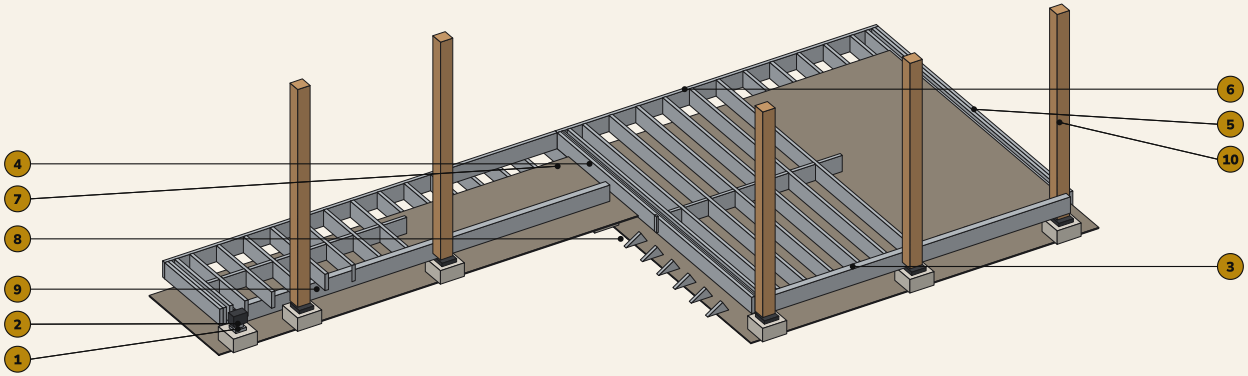

KEY

1. Diamond Pier DP-50/50 — head + 4 driven pins (frost-protected, no excavation)
2. 3x3 galvanized HSS post stub on a pier-head bracket
3. Boxed CEMCO 7-1/4" steel C beam (2 C toe-to-toe), flush
4. CEMCO 7-1/4" steel C-joist, 16 ga G90, @ 12" OC — clip angles each end
5. CEMCO 7-1/4" steel track rim (caps the joist ends)
6. Steel ledger track + 3x3 ledger angle on the house rim, flashed
7. Steel blocking at the breaker / picture-frame joists
8. Stair — steel stringers, Landmark treads, closed risers, lands on grade
9. Gravel over 6-mil poly under the decks
10. 6x6 Douglas fir #1 cover post on ABA66Z (shared Diamond Pier)

Decking, covers and house removed to show the frame. Every joist end clips to the track, ledger track or boxed beam; the engineer's clip schedule governs.

Axonometric · not to scale · the model the plans are drawn from

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

A-101 DECKING PLAN

Every board, border and divider as it lays; rail posts shown for the pockets

281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...

GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 · PERMIT SET



DECKING

Field: TimberTech Landmark American Walnut, 5.5" x 1", 3/16" gaps

Border & dividers: Landmark American Walnut

Boards run parallel to the house; edge overhang 1" over the fascia

CONCEALoc at every joist in every gap (437)

Cap-Tor xd color-matched ONLY at: first row 1 per joist on the house edge · borders 2 per bearing point @ 16" · fascia 2 at each board end then

Rows per panel: panel 1 (0"–14'-8") 7 rows · panel 2 (14'-8"–26'-8") 25 rows · 2 ripped pieces · 1 breaker — every board one piece wall to border, no butt


A-202 ELEVATIONS

Front from the yard and both ends, drawn from the model — deck and roof-cover heights


281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...

GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 · PERMIT SET

FRONT ELEVATION — from the yard

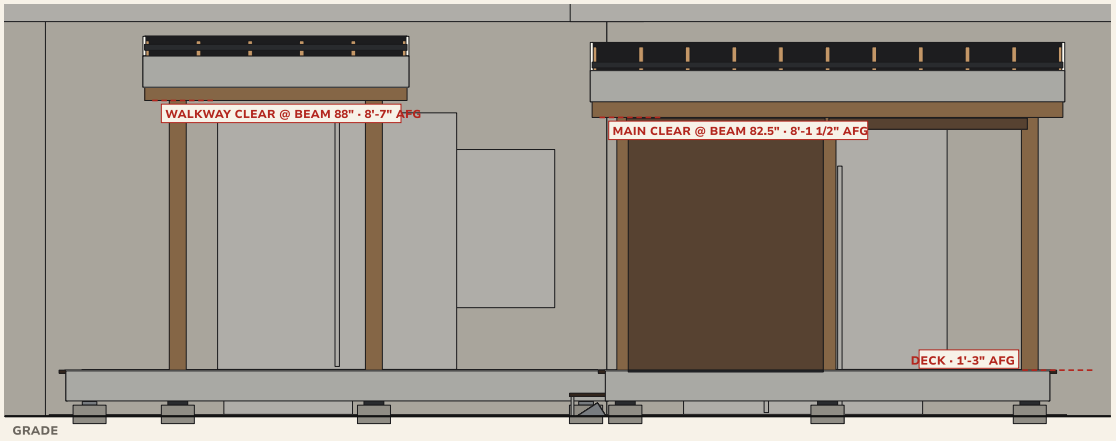


RIGHT END ELEVATION

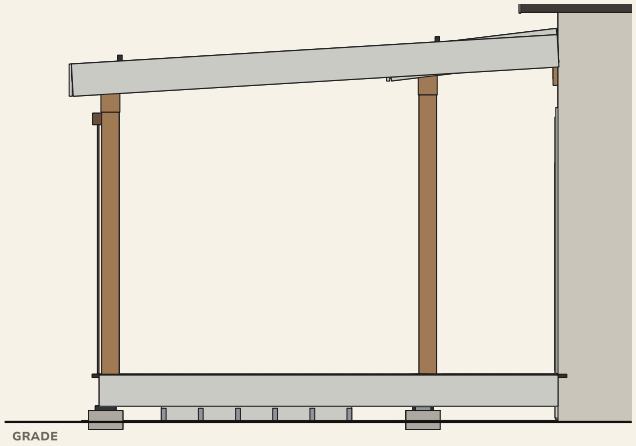

NOTES

· Deck surface 1'-3" above grade (walkway low point 9")
· Heights AFG = above finished grade at the beam line; field-verify grade before setting the piers
· Clear heights are to the underside of the beam / ledger above the deck surface
· Roof covers: black standing seam on 2x8 rafters, Hardie fascia / rakes / soffit; slope to the yard
· Deck frame: CEMCO cold-formed steel; HardieTrim skirt covers the track rims
· No guard required: every walking surface is under 30" above grade (IRC R312.1)

LEFT END ELEVATION

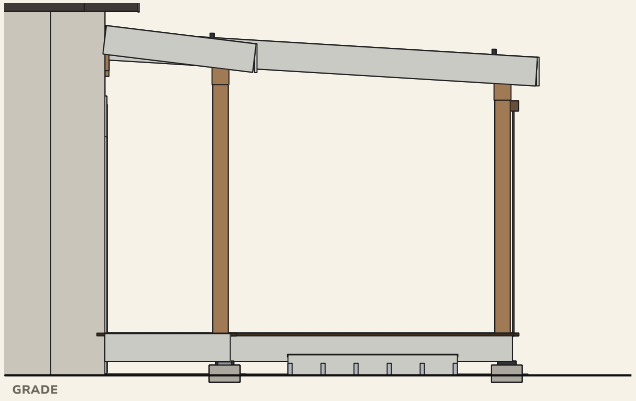


Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.


A-301 SECTION + FRONT ELEVATION

Cut through the deepest zone; heights to grade, frost line, cantilever, guard

281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...

GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 · PERMIT SET

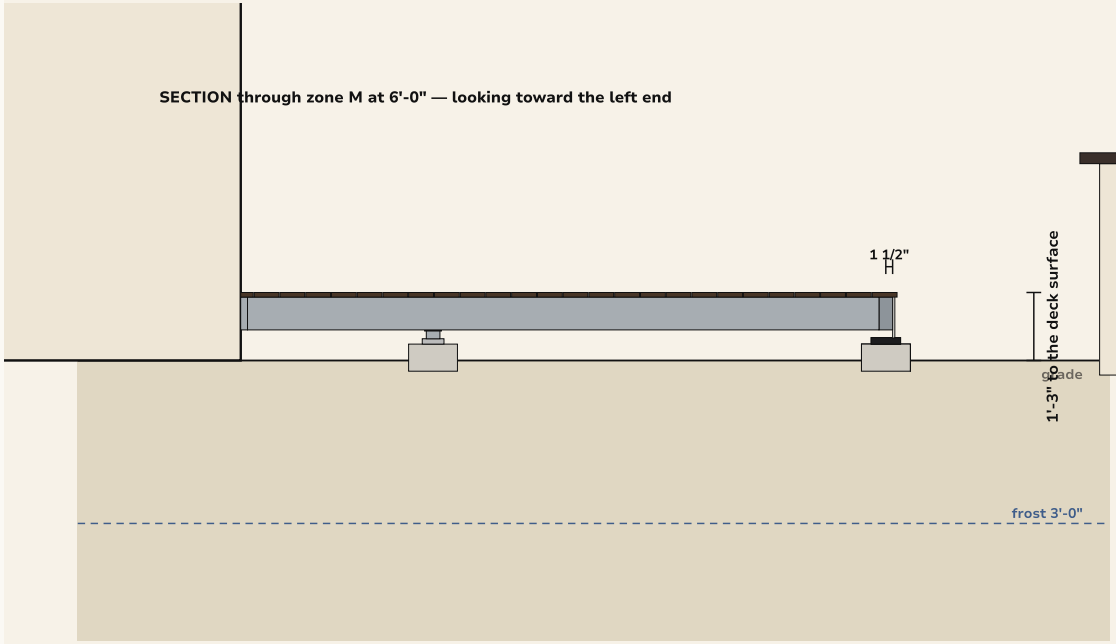

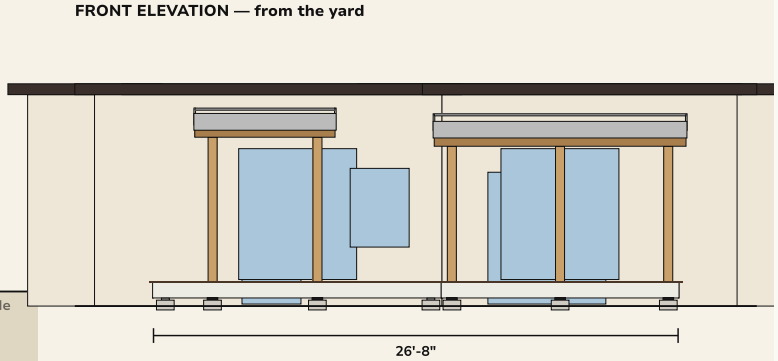

SECTION NOTES

Deck surface 1'-3" above grade

FLUSH boxed 7-1/4" steel C W: 14'-2", 4 posts at 7 3/16" / 3'-0" / 8'-4" / 14'-1 3/16" (worst 474 lb); FLUSH boxed 7-1/4" steel C M: 11'-6", 3 posts at 15'-2" / 20'-8" / 26'-2" (worst

Posts 2 x 3x3 galvanized steel post stubs + 5 cover posts carrying the deck beam on DP-50/50

7-1/4" steel ledger track + 3x3 ledger angle, 1/4" structural screws 2 rows staggered 16" OC into the rim board (engineer confirms) · flashing and membrane as for wood

Section left · elevation right · not to a common scale

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.


A-401 ROOF COVERS — PLAN + SECTION

Lean-to covers: ledger, rafters, beam, posts on the piers, clear heights, pitch, standing seam, Hardie, blinds


281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...

GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 · PERMIT SET


MAIN COVER — PLAN

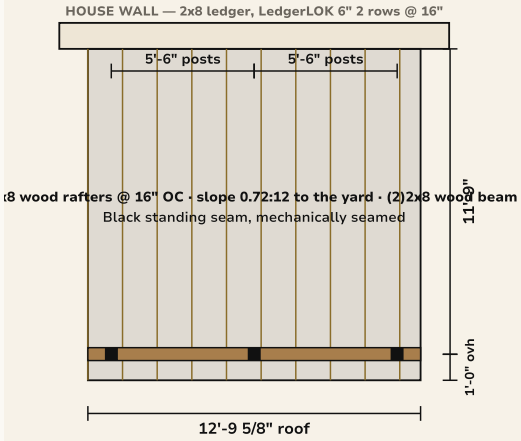

WALKWAY COVER — PLAN

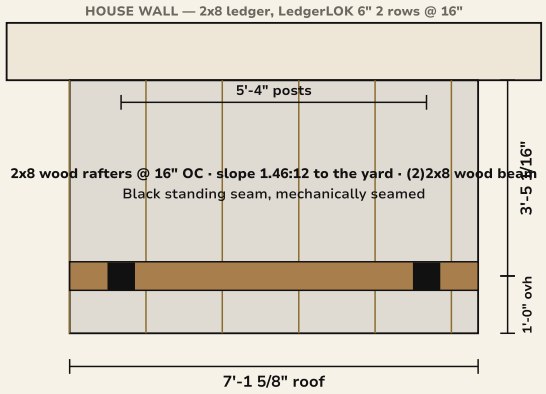


MAIN COVER — SECTION

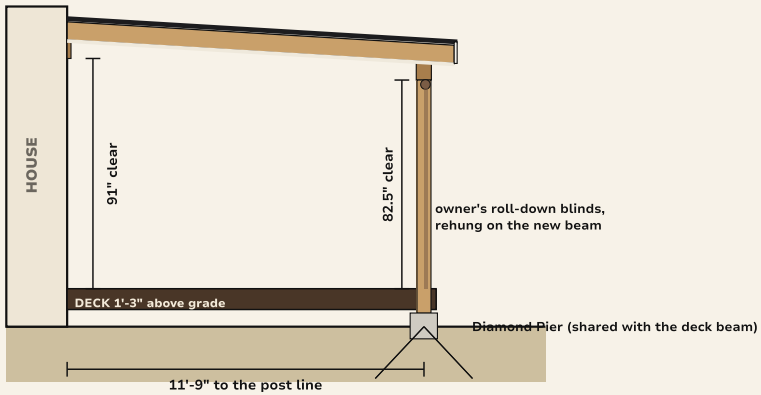

Standing seam 24 ga, 16" panels, 1-1/2" mechanical (double-lock) seam — rated for 0.72:12 · high-temp ice & water underlayment over 7/16" OSB
Headwall flashing counterflashed into the siding · color-matched eave / rake trim · snow bar across the low eave
HardieSoffit cedarmill ceiling · HardieTrim fascia + rakes (Arctic White) · H2.5AZ at every rafter · AC6Z caps
6x6 Douglas fir #1 posts on ABA66Z bases on the Diamond Pier bolt · AC6Z cap to the (2)2x8 beam · the engineer's uplift hold-down governs

WALKWAY COVER — SECTION

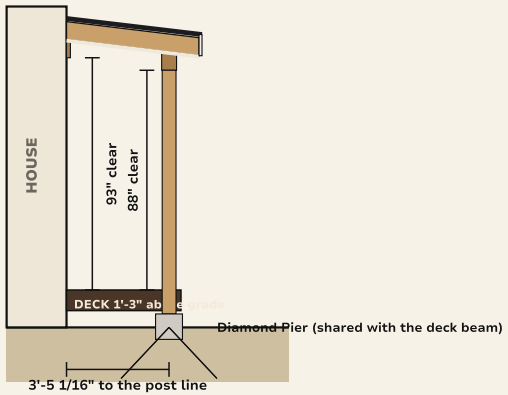


Standing seam 24 ga, 16" panels, 1-1/2" mechanical (double-lock) seam — rated for 1.46:12 · high-temp ice & water underlayment over 7/16" OSB
Headwall flashing counterflashed into the siding · color-matched eave / rake trim · snow bar across the low eave
HardieSoffit cedarmill ceiling · HardieTrim fascia + rakes (Arctic White) · H2.5AZ at every rafter · AC6Z caps
6x6 Douglas fir #1 posts on ABA66Z bases on the Diamond Pier bolt · AC6Z cap to the (2)2x8 beam · the engineer's uplift hold-down governs

A-402 ROOF COVERS — EXPLODED ISOMETRIC, LABELED

Both lean-to covers pulled apart layer by layer

281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...

GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 · PERMIT SET

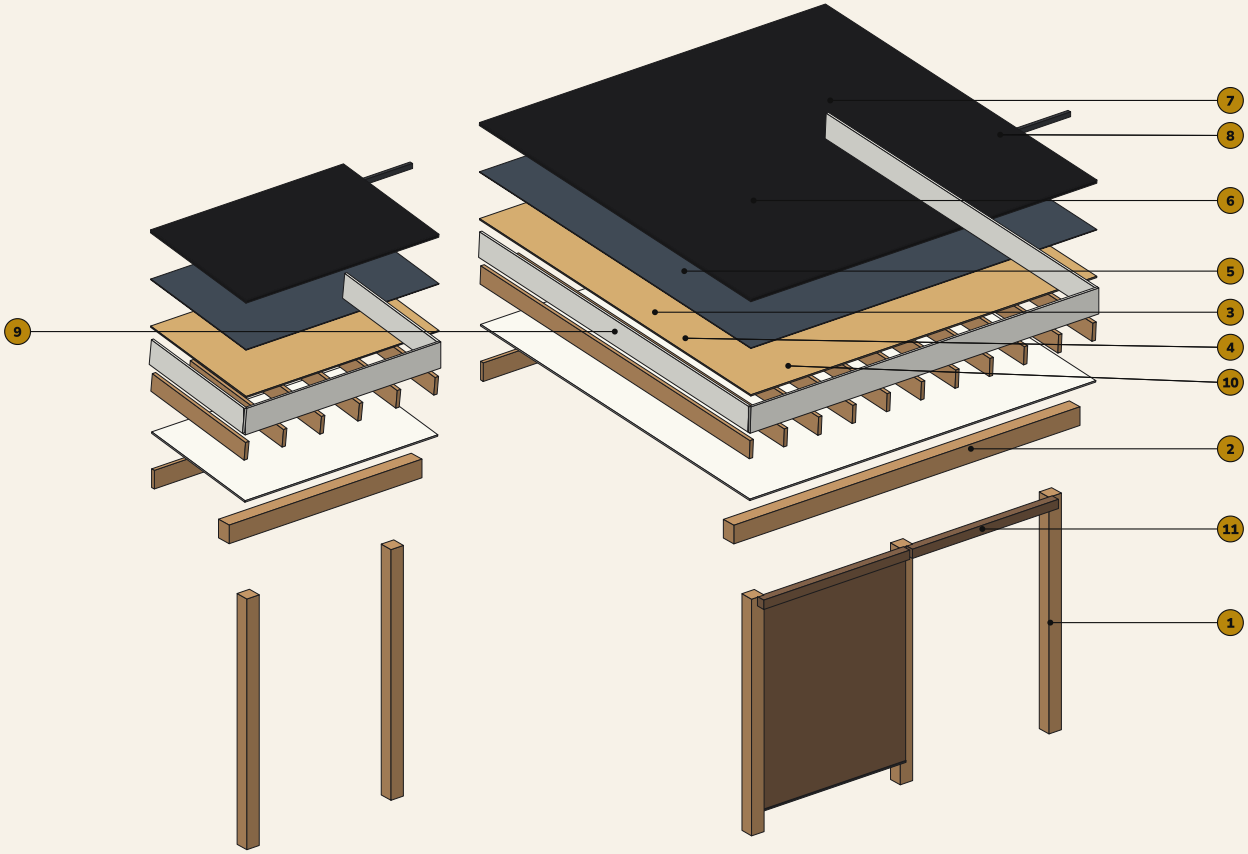

KEY

1. 6x6 Douglas fir #1 cover post on ABA66Z (shared Diamond Pier)
2. (2)2x8 cover beam, wood, AC6Z cap
3. 2x8 cover ledger, wood, LedgerLOK 6" 2 rows, headwall flashed
4. 2x8 rafters @ 16" OC, wood, H2.5AZ at the beam
5. 7/16" OSB roof sheathing
6. High-temp self-adhered underlayment
7. Black standing seam, 24 ga, mechanically seamed
8. Snow retention bar, clamped to the seams
9. HardieTrim fascia + rakes Arctic White
10. HardieSoffit cedarmill ceiling Arctic White
11. Existing roll-down blinds (stay)

Lifts are for clarity only. Order of work: posts on ABA66Z bases, beam on AC6Z caps, ledger on LedgerLOK, rafters with H2.5AZ, soffit, OSB, underlayment, panels, trims, snow bar.

Axonometric · not to scale · the model the plans are drawn from

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.


D-501 DETAILS — STEEL FRAME

Steel ledger · joist clips · boxed beam on the shared pier · Diamond Pier · deck edge · under the deck

281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...


GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 · PERMIT SET

1 STEEL LEDGER AT THE HOUSE

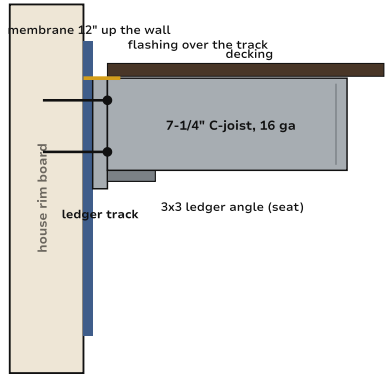


7-1/4" steel ledger track + 3x3 ledger angle, 1/4" structural screws 2 rows staggered 16" OC into the rim board (engineer confirms) · flashing and membrane as for wood

2 JOIST TO TRACK / BEAM

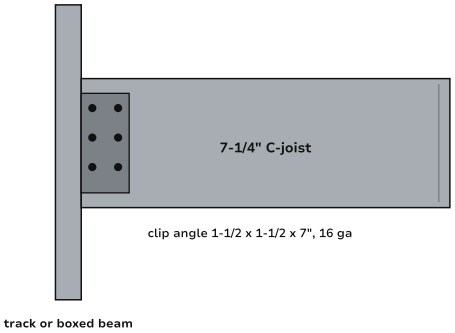


#12-14 self-drilling hex-washer screws, 4 per leg minimum (clip to joist web, clip to track / beam web) — the engineer's clip schedule governs. Cut ends and field holes cold-galvanized.

3 BOXED BEAM · SHARED PIER

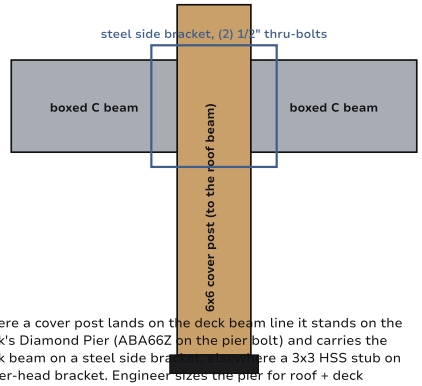


Where a cover post lands on the deck beam line it stands on the deck's Diamond Pier (ABA66Z on the pier bolt) and carries the deck beam on a steel side bra[illegible]re a 3x3 HSS stub on a pier-head bracket. Engineer sizes the pier for roof + deck and the uplift hold-down.

4 DIAMOND PIER

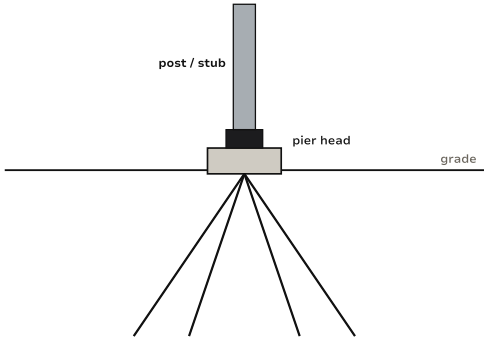

DP-50/50 (4 pins) — no excavation; frost-protected by the pins (submit the evaluation report). 811 locate first.

5 DECK EDGE · HARDIE SKIRT

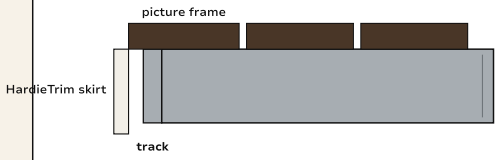

TimberTech Landmark American Walnut: hidden fasteners in the field, the picture frame face-fastened with color-matched plugs — every screw the maker's steel-frame screw for 14–18 ga. HardieTrim skirt on furring screwed to the track.

6 UNDER THE DECK · LOW END



2" gravel over 6-mil poly, sloped away from the house

Walkway low point: 9" surface to grade leaves 0.75" under the frame — dig out / regrade to 2" min. under that run before the poly.


D-502 CONNECTION DETAILS — CEMCO STEEL DECK FRAME

Ledger track · joist clips · boxed beam · HSS stub on the pier · shared pier · deck edge · stair


281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...

GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 · PERMIT SET


1 LEDGER TRACK AT THE HOUSE — SECTION

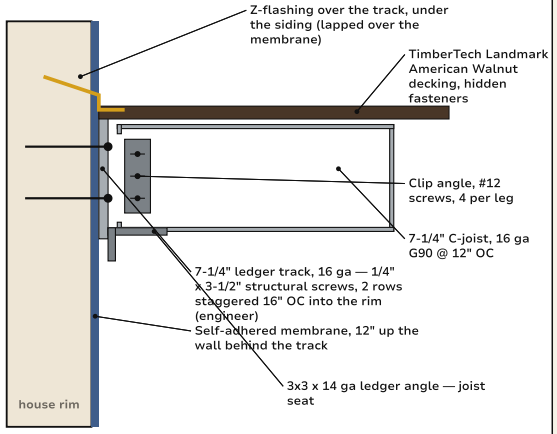


2 JOIST TO BOXED BEAM — SECTION

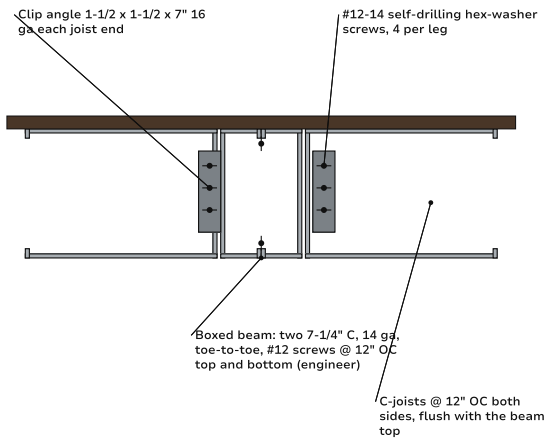


3 BEAM ON HSS STUB + DIAMOND PIER

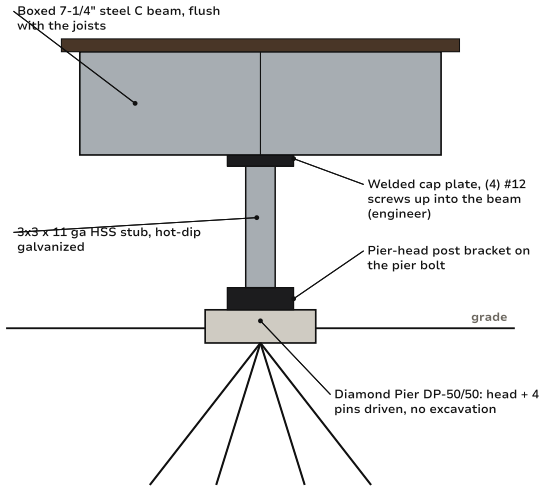


4 SHARED PIER — COVER POST + DECK BEAM

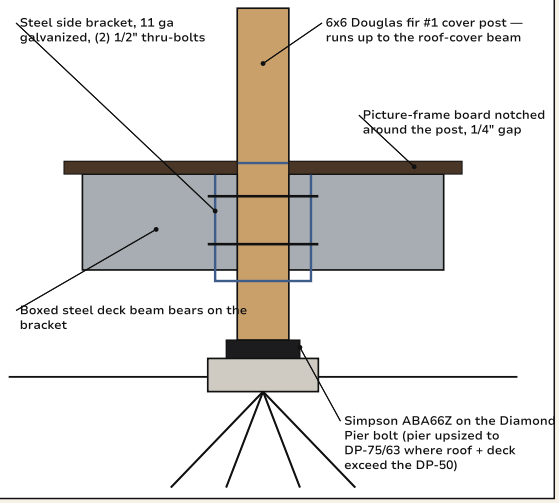

5 DECK EDGE — TRACK RIM, BORDER, HARDIE SKIRT

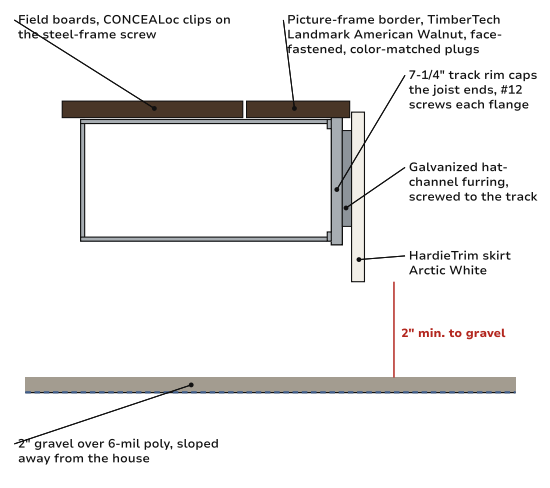

6 STAIR OFF THE MAIN DECK — SECTION

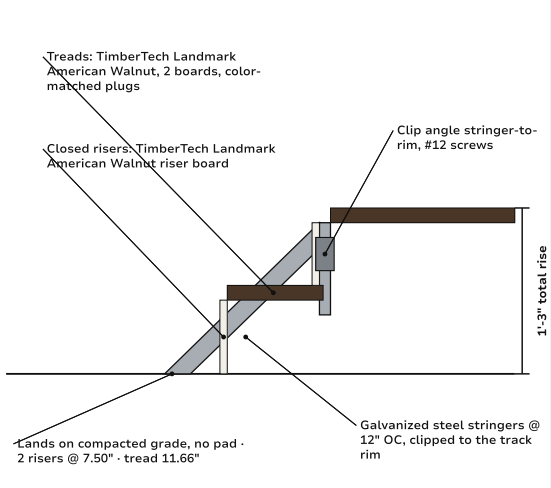

Schematic details, not to scale · the engineer of record's details and screw schedule govern

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.


D-503 CONNECTION DETAILS — ROOF COVERS (WOOD FRAMING)

Ledger + headwall · eave at the beam · post base · rake · standing seam + clip · blinds


281 S Jefferson Ave — two decks + two lean-to covers (CEMCO steel,...

GSX · Jade Pender 303-550-9558 · October 16, 2026 · Rev 0 · PERMIT SET


1 COVER LEDGER + HEADWALL — SECTION

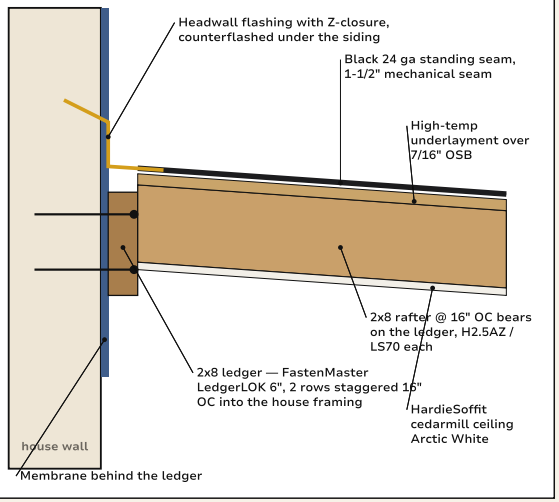


2 EAVE AT THE BEAM — SECTION

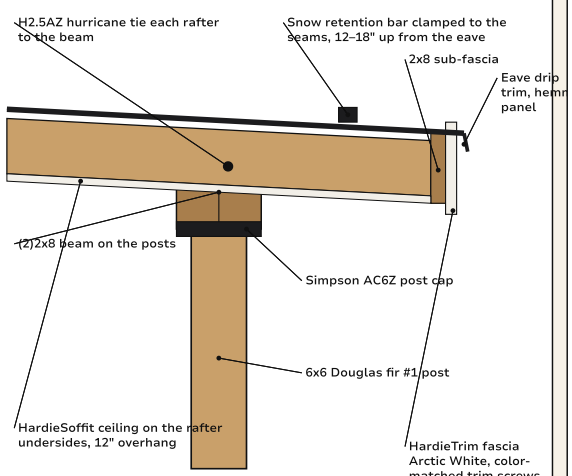


3 COVER POST BASE + DECK PENETRATION

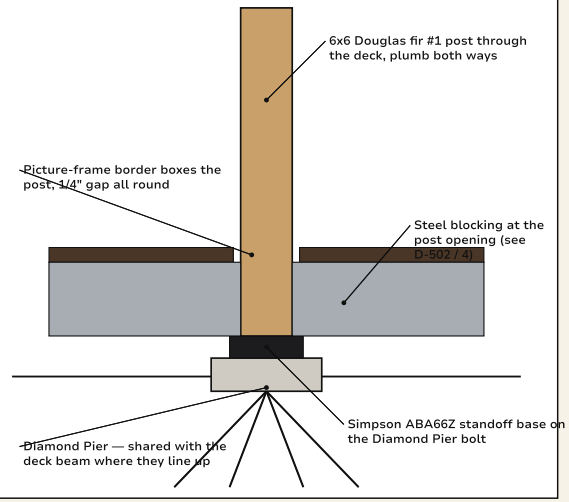


4 RAKE EDGE — SECTION ACROSS THE SLOPE

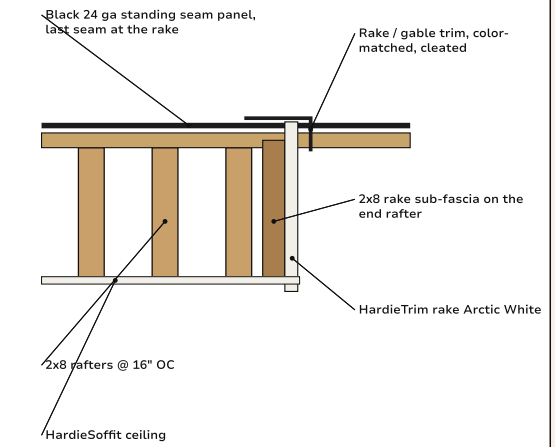


5 STANDING SEAM PANEL + CLIP

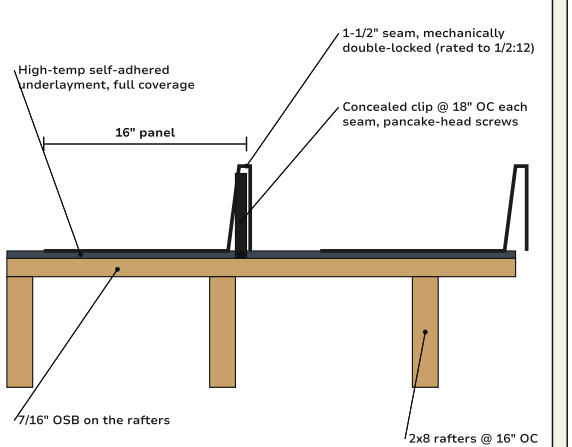


6 EXISTING BLINDS AT THE BEAM

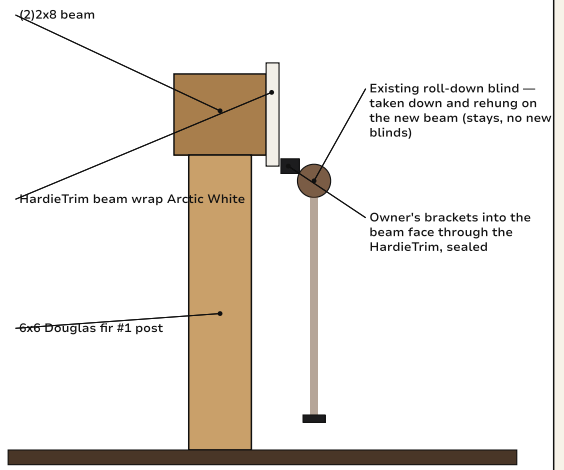


Decks + roof covers

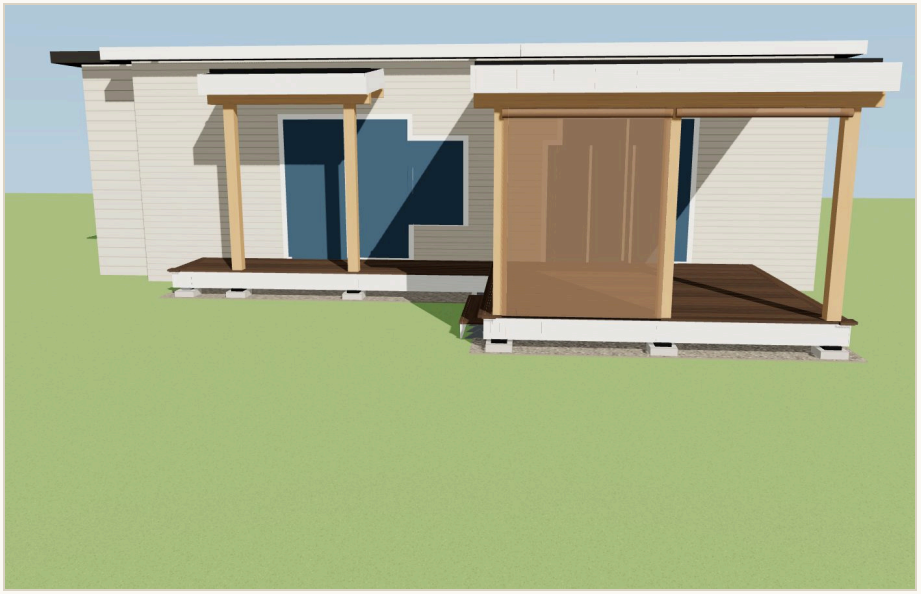


From the yard

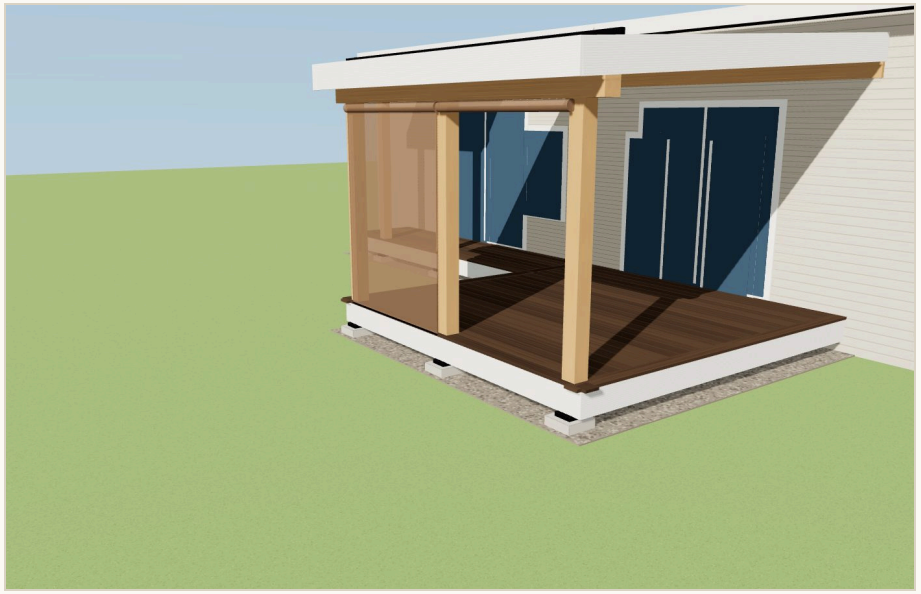


From the front corner

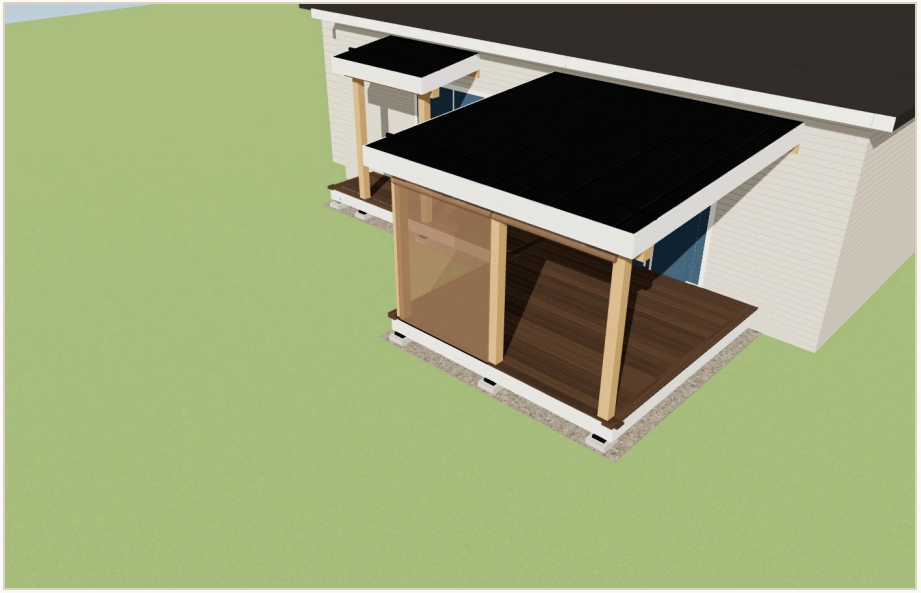


Isometric

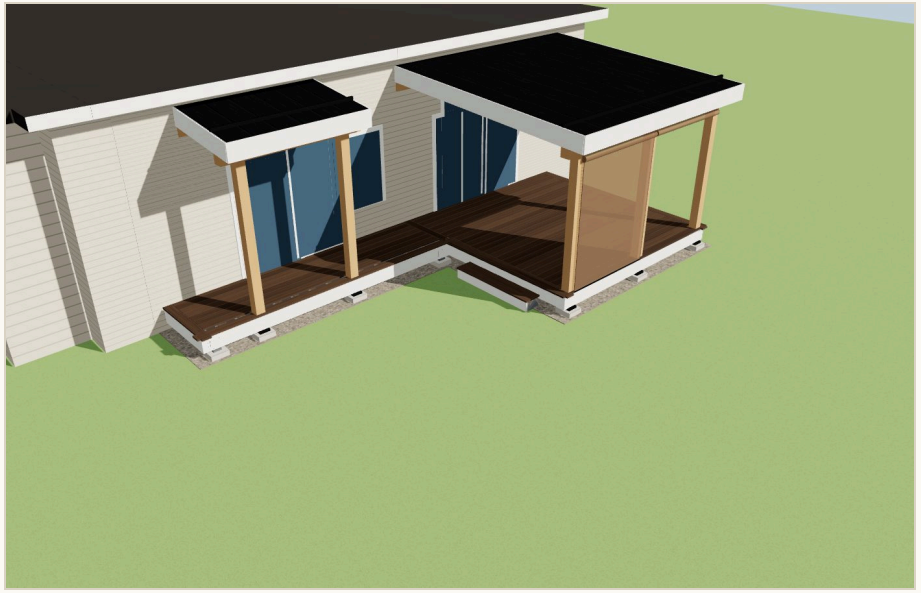


Isometric — opposite corner

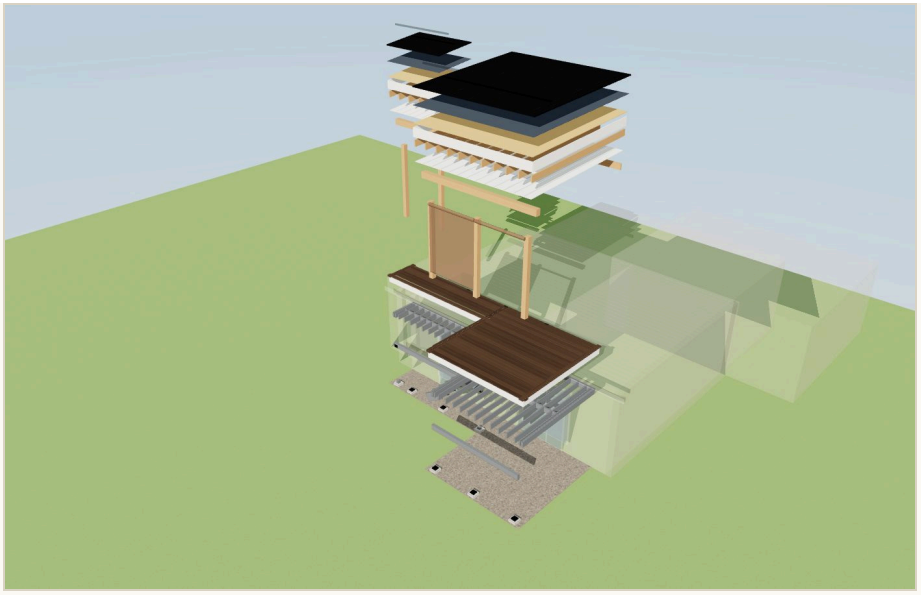


Exploded — every layer, covers included

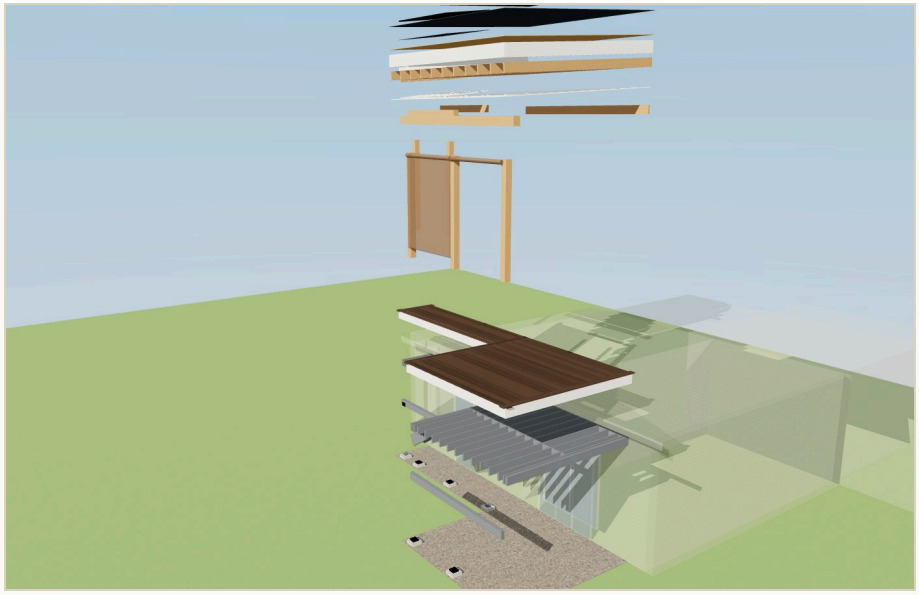

Exploded — from the corner

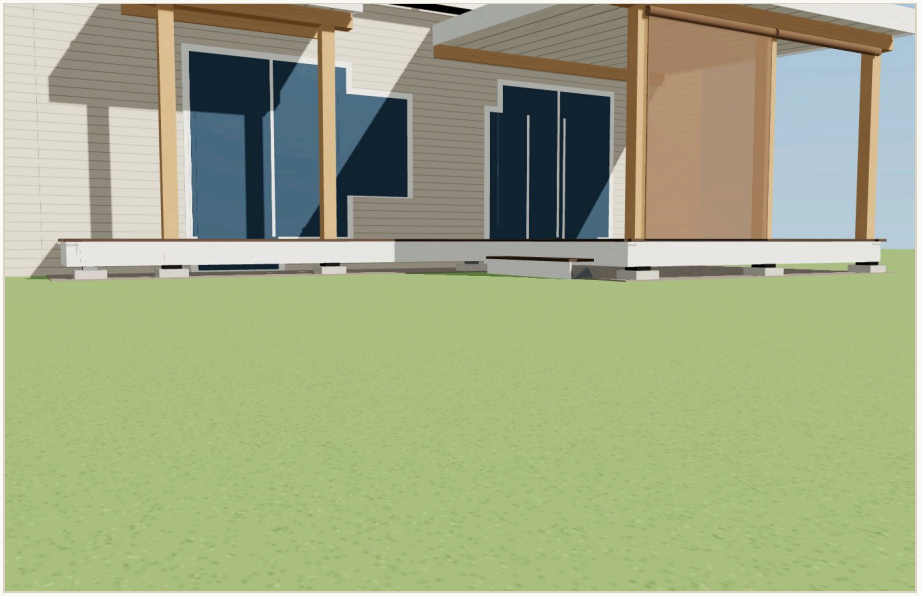

Structure from below

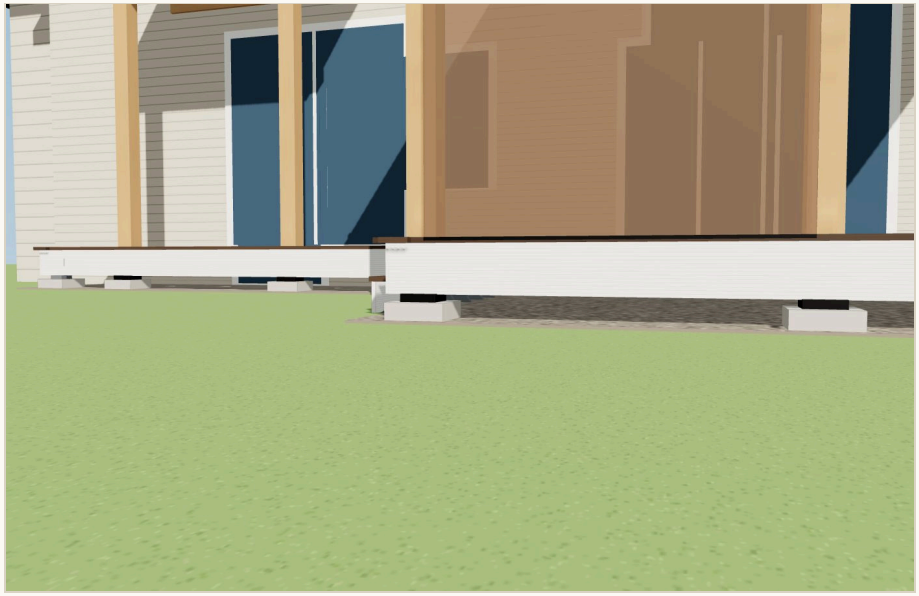

Under the deck