GS EXTERIOR EXPERTS · DECK DIVISION · PROPOSAL

Decks + Roof Covers · 281 S Jefferson Ave


Prepared for the owner · 281 S Jefferson Ave, Louisville, CO 80027 · October 16, 2026

CHECK OR ACH	FINANCED	MONTHLY
$36,533	**$39,283**	**$456**
	no money down	6.99% · 10 years




Two new decks and two new roof covers in place of the old ones. A 12' x 12' main deck with one wide stair (the box step goes) and a 14'8" walkway along the house, both framed in CEMCO galvanized steel on Diamond Pier foundations, about 15" off the grade. TimberTech Advanced PVC in Landmark American Walnut with a picture frame and divider boards, every field board one piece with no butt joints. Both lean-to covers rebuilt with a black standing seam roof, raised 3" at the main cover, and finished in James Hardie soffit, fascia and rakes; your existing roll-down blinds stay.

AT A GLANCE

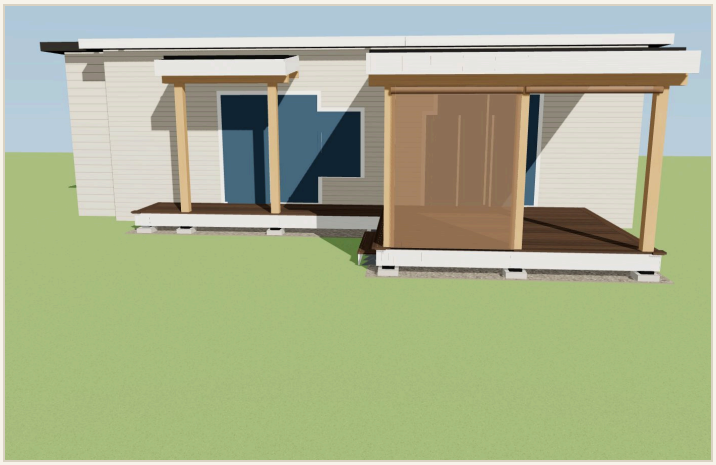

From the yard

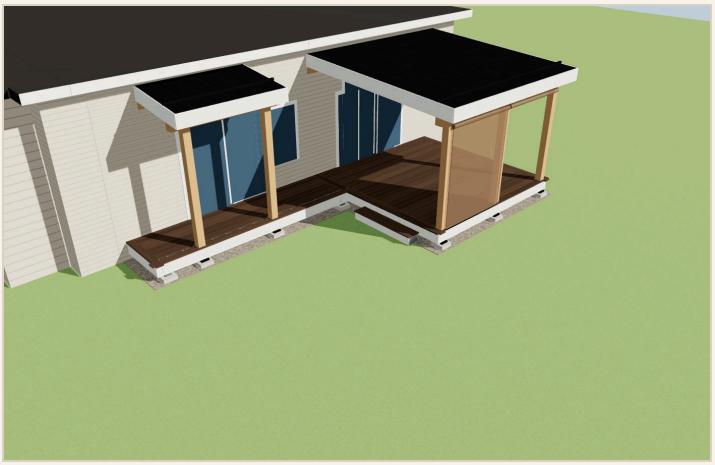


Isometric from the open corner

Deck	197.8 SF · 1'-3" above grade · 50.7 LF of outer edge
Decking	TimberTech Landmark American Walnut, picture frame and breaker boards in Landmark American Walnut · hidden fasteners
Rail	None
Stair	2 risers at 7.5", 5'-0" wide
Structure	CEMCO cold-formed steel frame, 7-1/4" C-joists at 12" on centre, boxed steel beams; 2 x 3x3 galvanized steel post stubs + 5 cover posts carrying the deck beam on DP-50/50
Design load	50 psf (40 psf live governs), stamped by a Colorado engineer

WHAT IT IS included in the price

ELEMENT	SELECTION
Decking	TimberTech PVC Landmark, American Walnut; picture frame and dividers in Landmark American Walnut. Grooved boards, 3/16" gaps, a HardieTrim skirt around the frame (Arctic White). Ignition Resistant, Class A, WUI; Limited Lifetime product / 50-yr fade & stain.
Frame	7-1/4" CEMCO cold-formed steel C-joists, 16 ga G90, @ 12" OC; single-ply 7-1/4" steel track rims and ledger track on a steel angle; boxed steel beams.
Foundation	7 Diamond Pier foundations (DP-50/50; upsized where a cover post and the deck share a pier) — no excavation.
Design load	30 psf snow, stamped by a Colorado engineer.
Hardware	Galvanized steel clip angles and self-drilling screws throughout the frame; TimberTech CONCEALoc hidden fasteners in the field and color-matched plugs on the picture frame, every screw the steel-frame type.
Roof covers	2 lean-to covers replaced: 6x6 posts on the Diamond Pier foundations, a new ledger on the house, 2x8 rafters at 16", Black standing seam steel roof, 24 ga, mechanically seamed for the low pitch, over high-temp underlayment, with a snow bar across the low eave; James Hardie soffit ceiling, HardieTrim fascia and rakes in Arctic White. Main cover: 91" clear at the house to 82.5" at the beam; Walkway cover: 93" clear at the house to 88" at the beam.
Site	The existing decks and roof covers removed and hauled off; 6-mil poly and 2" of gravel under the decks.
Not included	Electrical — no lighting, fans or outlets; Roll-down blinds — existing, they stay; Grading beyond the under-deck prep; Variance or PUD amendment, if Planning requires one.

RENDERS 3D model · design intent

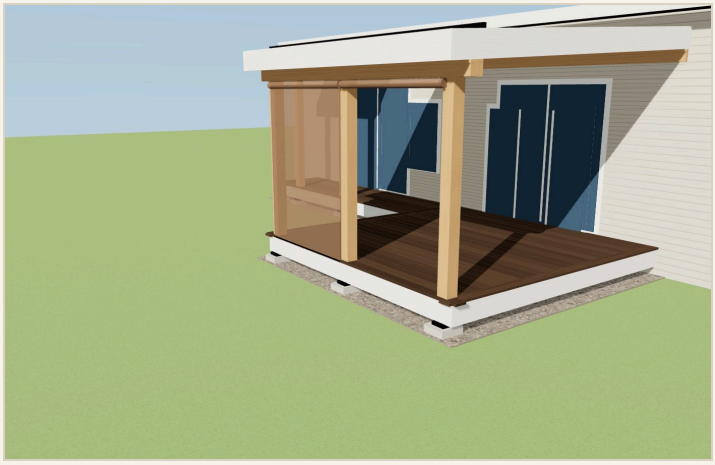


From the front corner



Standing on the deck



Low isometric

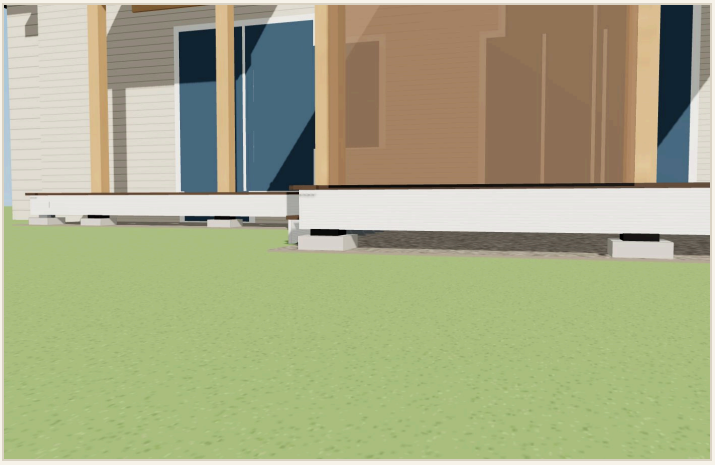


Under the deck — posts, beams, footings

SUN AND SHADE


the real sun at this address · the covers and the blinds through the day




Jul 15 · 9 AM — sun E, 35° up

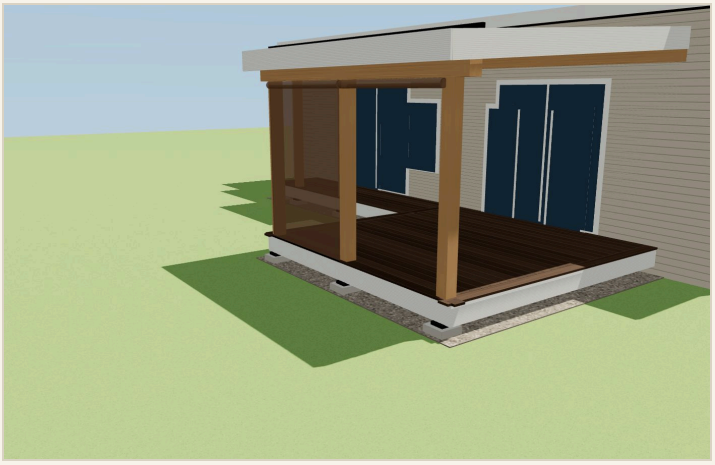

Jul 15 · 12 PM — sun SE, 67° up

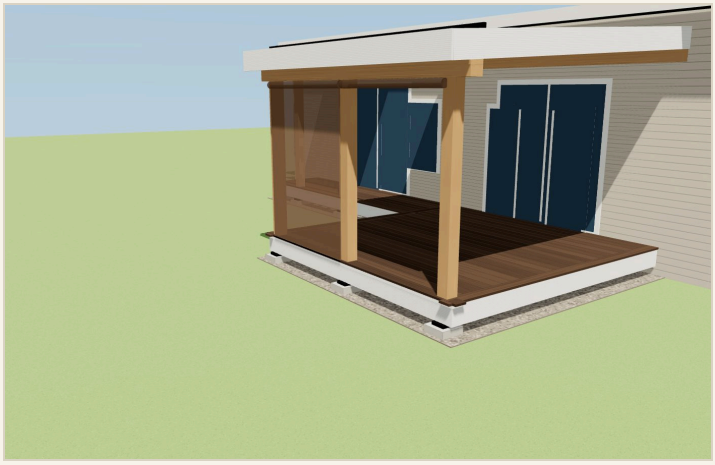

Jul 15 · 3 PM — sun WSW, 60° up

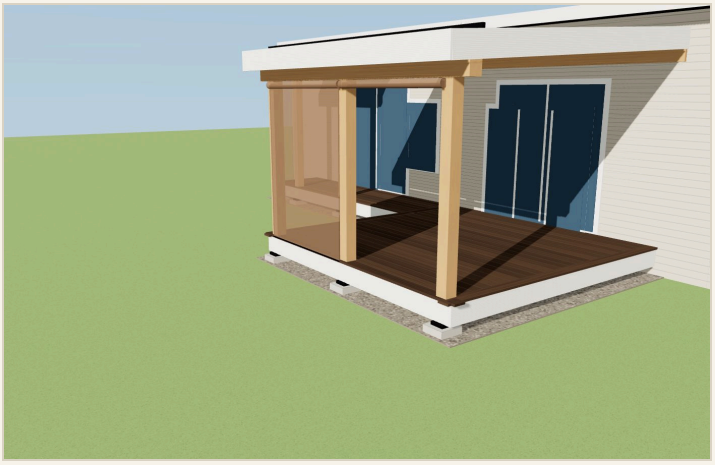


Jul 15 · 6 PM — sun W, 26° up




Dec 21 · 3 PM — sun SW, 14° up


ISOMETRICS the model from four corners

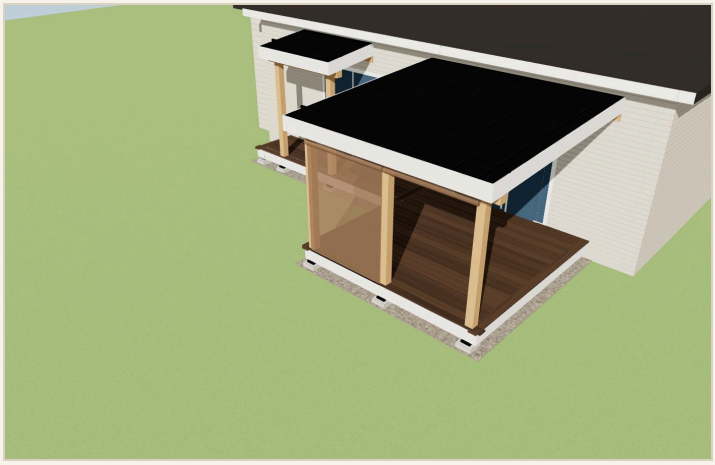


Isometric from the stair corner

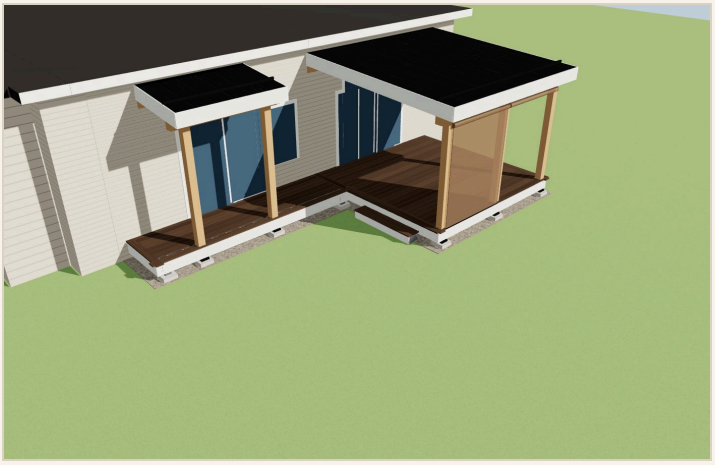

Isometric from the open corner

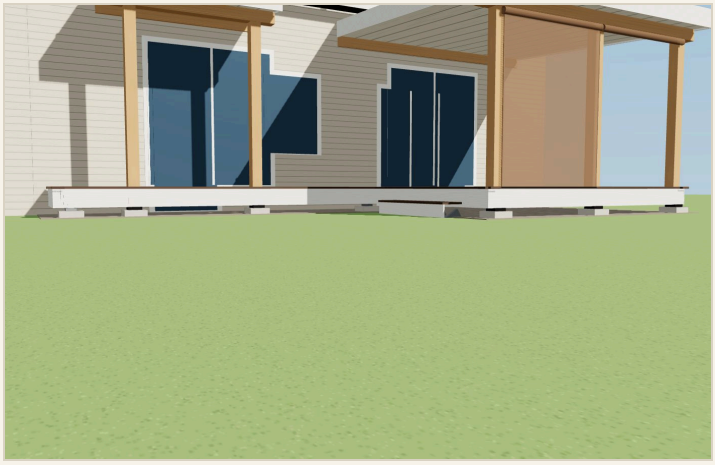


Isometric from under the frame

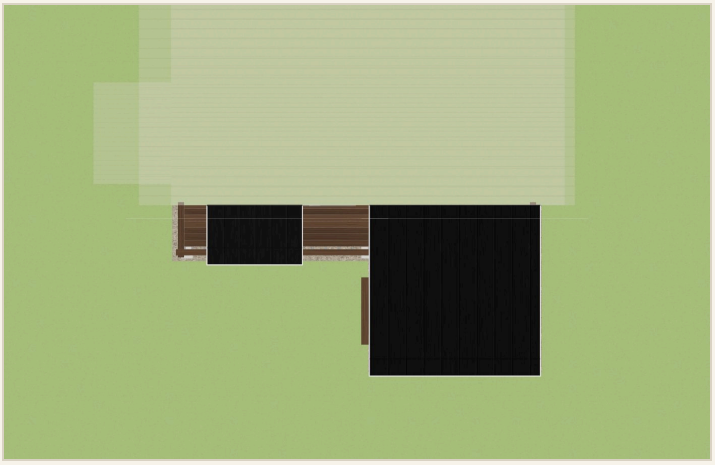


Plan from above


EXPLODED VIEWS every layer pulled apart

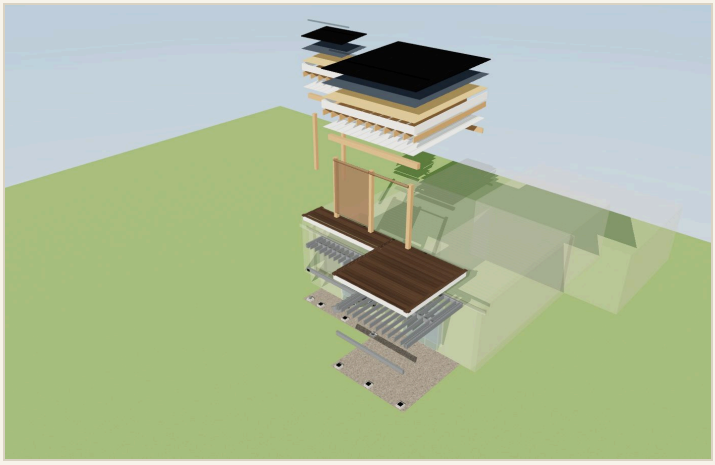


Exploded — every layer

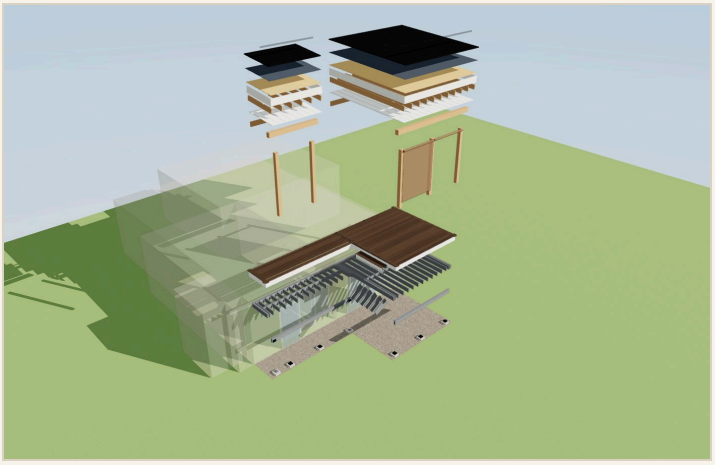

Exploded — from the open corner

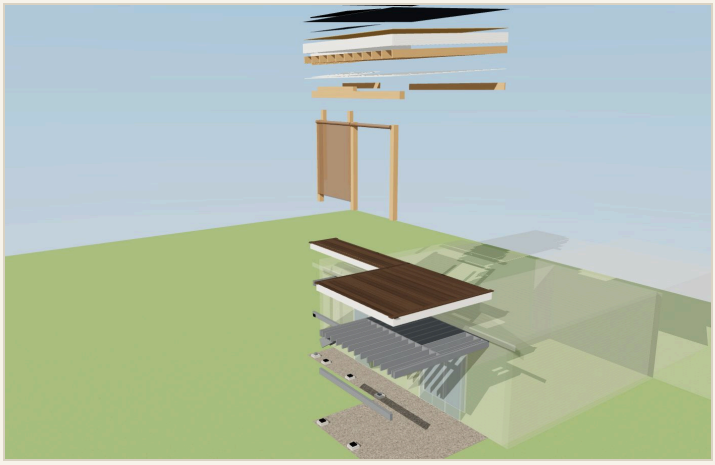


Exploded — from the front corner

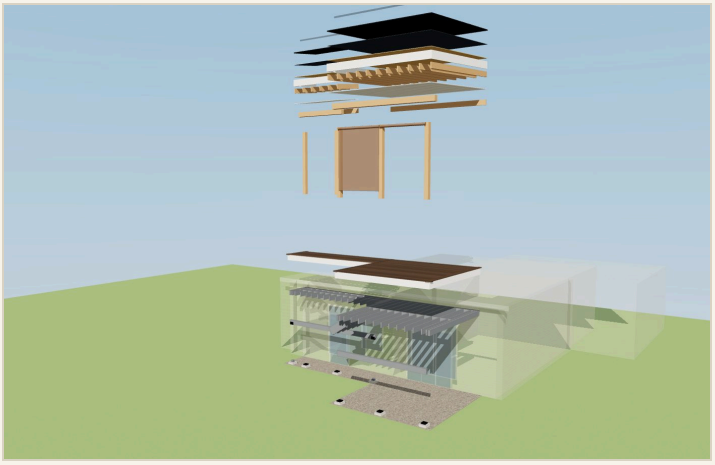


Exploded — low angle

UNDER THE DECK footings, posts, beams, frame

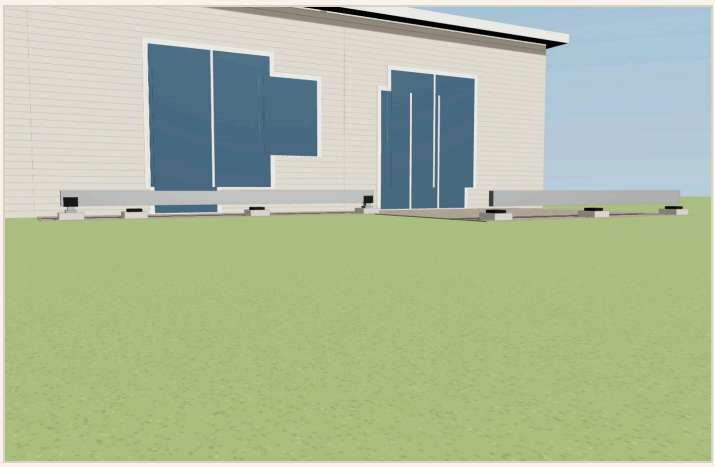

Posts and beams on the footings

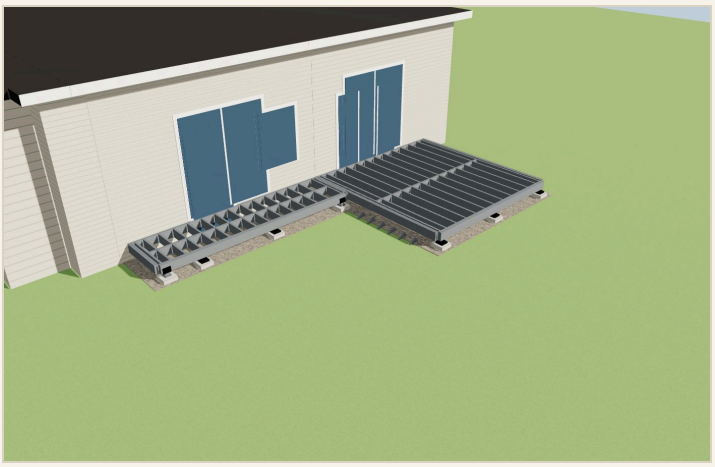

Frame only — joists, rims, beams, ledger

PRICE

Total investment $39,283 — financed, no money down

- 12 months no payments, no down payment
- 18 months no payments, no down payment
- 6.99% for 10 years — about $456/month

Check or ACH: $36,533 (7% savings)

WHAT THE PRICE INCLUDES

ITEM	VALUE
Demolition & haul-off	$404
Foundation & structure	$10,203
Decking & fascia	$8,476
Stairs	$970
2 roof covers — lean-to roofs on 6x6 Douglas fir posts, standing seam steel roof with snow retention, Hardie soffit, fascia and rakes, existing covers torn off	$15,689
Site & project services	$791
Total, check or ACH	**$36,533**
Total, financed	**$39,283**

Engineering — $1,800 to $3,000. Stamped drawings by a Colorado engineer (30 psf snow). GSX provides the engineer and bills the engineering at cost, with no markup. You own the stamped set. It is separate from the deck price above.

NEXT STEP

Engineering first. This is a quote: the numbers depend on the stamped engineering, so the first step is engineering. GSX provides the Colorado engineer and supplies the design package; you pay GSX the engineer's cost at no markup and you own the stamped set. When the stamped set is in hand, GSX issues a fixed-price proposal on these numbers with the payment terms.

Quote, not a contract: a fixed-price proposal follows the stamped engineering. Quote numbers hold 30 days. Renders and plan are design intent; the stamped engineering set governs structure, dimensions and locations.

3D MODEL



The interactive 3D model lives at the online version of this document.

GS Exterior Experts · Deck Division

Renders and drawings are design intent; dimensions on the sheets govern. Numbers hold 30 days.