

# Glengarry Pl · Both Decks

Prepared for the owner · 166 Glengarry Pl, Castle Rock, CO 80108 · September 21, 2026

|                                                              |                                                          |                                                          |
|--------------------------------------------------------------|----------------------------------------------------------|----------------------------------------------------------|
| <b>BOTH DECKS · CHECK<br/>OR ACH</b><br><br><b>\$157,215</b> | <b>FINANCED</b><br><br><b>\$169,048</b><br>no money down | <b>MONTHLY</b><br><br><b>\$1,962</b><br>6.99% · 10 years |
|--------------------------------------------------------------|----------------------------------------------------------|----------------------------------------------------------|



Both decks rebuilt in TimberTech Vintage Coastline on new frames, keeping the stucco parapets and the columns that give the house its look. The upper deck's price keeps all three of its existing items; replacing any of them is priced on its own under Your choices.

## THE SHORT VERSION

---

|             |                                                                                                                                                                                                                  |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| WHAT STAYS  | The stucco parapets on both decks, the nine stucco columns and their caissons, and the two columns through the lower deck. Any of the three upper-deck items can be replaced instead; each is priced on its own. |
| WHAT IS NEW | Everything else: both frames, both beams, both decks, the stair with its landing, and the fasteners.                                                                                                             |
| DECKING     | TimberTech Vintage Coastline, a Dark Hickory picture frame and breaker boards, Cortex fasteners with color-matched plugs. Class A fire rated. Limited lifetime product warranty, 50 years on fade and stain.     |
| FRAME       | Pressure-treated joists at 12" on centre on 6x12 Douglas fir beams. Stamped by a Colorado engineer.                                                                                                              |
| PRICE       | \$157,215 for both decks by check or ACH, \$169,048 financed with no money down, about \$1,962 a month. Each deck can be done on its own.                                                                        |

\$118,896

check or ACH · \$127,845 financed · \$1,484 a month

Twelve feet up, rebuilt same for same. The stucco parapet, the nine stucco columns and their caissons stay. Everything above the columns is new. The stair goes down seven risers along the west wall to a landing, turns left, and goes down six more to the lower level.



From the yard



Isometric from the open corner

- Deck

741.5 SF · 12'-0" above grade · 74.0 LF of outer edge
- Decking

TimberTech Vintage Coastline, picture frame and breaker boards in Vintage Dark Hickory · Cortex fasteners with color-matched plugs
- Rail

The existing stucco parapet stays; Fulton Black 36" rail on the new stair and landings
- Stair

13 risers at 7.4", 4'-0" wide: 7 down to the 4'-0" x 4'-0" and 7'-8" x 5'-8" landing, turn left, 6 down to the lower level · guard rail on the landings
- Structure

2x12 pressure-treated frame at 12" on centre, 6x12 Douglas fir beams; the 9 existing stucco columns and caissons stay; new post bases epoxy-set on the caissons
- Design load

50 psf (40 psf live governs), stamped by a Colorado engineer

What it is


ELEMENT SELECTION

|            |                                                                                                                                                                                                                              |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Decking    | TimberTech PVC Vintage, Coastline; picture frame and dividers in Vintage Dark Hickory. Square-shoulder boards, 3/16" gaps, matching fascia. Ignition Resistant, Class A, WUI; Limited Lifetime product / 50-yr fade & stain. |
| Railing    | The existing stucco parapet stays on the deck edges. TimberTech Fulton Rail, Black, 36" on the new stair and landings.                                                                                                       |
| Frame      | 57 2x12 #1 True Frame Joist SYP GC @ 12" OC; 2-ply 2x12 front and sides and rear (freestanding); 6x12 Douglas fir beams.                                                                                                     |
| Foundation | The 9 existing stucco columns and caissons stay; new post bases epoxy-set on the caissons.                                                                                                                                   |


| ELEMENT SELECTION |                                                                                                                                                              |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Design load       | 30 psf snow, stamped by a Colorado engineer. Colorado Wildfire Resiliency Code practice: Class A decking, noncombustible rail, metal flashing at every wall. |
| Hardware          | Simpson ZMAX galvanized connectors. Cortex fasteners with color-matched plugs.                                                                               |

**\$38,319** check or ACH · \$41,203 financed · \$478 a month

In the alcove under the upper deck, 2'4" above grade, rebuilt inside the stucco parapet walls. The walls and the two columns that carry the deck above stay. The front stays open as the way out.

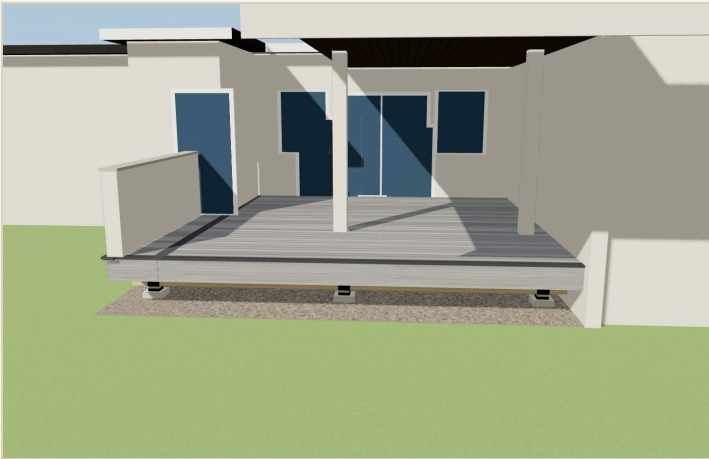

From the yard

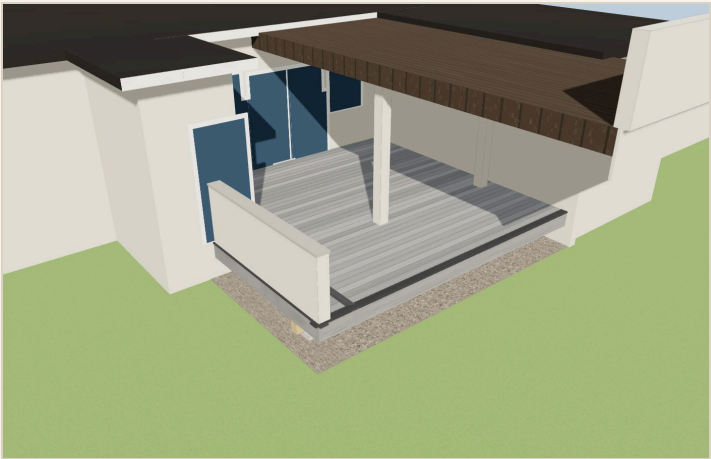

Isometric from the open corner

- Deck** 332.8 SF · 2'-4" above grade · 29.2 LF of outer edge
- Decking** TimberTech Vintage Coastline, picture frame and breaker boards in Vintage Dark Hickory · Cortex fasteners with color-matched plugs
- Rail** The existing stucco parapet walls stay. The front is open — the way out onto the yard, 2'4" above grade, so no rail is required there.
- Structure** 2x10 pressure-treated frame at 12" on centre, 6x12 Douglas fir beams; 3 x 6x6 on DP-50/50
- Design load** 50 psf (40 psf live governs), stamped by a Colorado engineer

What it is

ELEMENT SELECTION

|             |                                                                                                                                                                                                                              |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Decking     | TimberTech PVC Vintage, Coastline; picture frame and dividers in Vintage Dark Hickory. Square-shoulder boards, 3/16" gaps, matching fascia. Ignition Resistant, Class A, WUI; Limited Lifetime product / 50-yr fade & stain. |
| Railing     | The existing stucco parapet walls stay. The front is open — the way out onto the yard, 2'4" above grade, so no rail is required there.                                                                                       |
| Frame       | 21 2x10 #1 True Frame Joist SYP GC @ 12" OC; 2-ply 2x10 front and sides; 6x12 Douglas fir beams.                                                                                                                             |
| Foundation  | DP-50/50.                                                                                                                                                                                                                    |
| Design load | 30 psf snow, stamped by a Colorado engineer. Colorado Wildfire Resiliency Code practice: Class A decking, noncombustible rail, metal flashing at every wall.                                                                 |
| Hardware    | Simpson ZMAX galvanized connectors. Cortex fasteners with color-matched plugs.                                                                                                                                               |

YOUR CHOICES


**Upper deck.** The price above keeps everything that stays. Each line below is the whole difference, installed, to replace that item instead. Pick any, or all.

| OPTION                                                                                | CHECK OR ACH | FINANCED  | MONTHLY   |
|---------------------------------------------------------------------------------------|--------------|-----------|-----------|
| Replace the stucco parapet with TimberTech Fulton black rail                          | +\$9,997     | +\$10,750 | +\$125/mo |
| Replace the stucco columns with new 8x8 Douglas fir posts on the existing caissons    | +\$4,705     | +\$5,059  | +\$59/mo  |
| Replace the caissons and columns with new concrete caissons and 8x8 Douglas fir posts | +\$11,434    | +\$12,295 | +\$143/mo |
| All three: Fulton rail, new caissons and new posts                                    | +\$21,431    | +\$23,044 | +\$267/mo |

## Upper deck



From the front corner

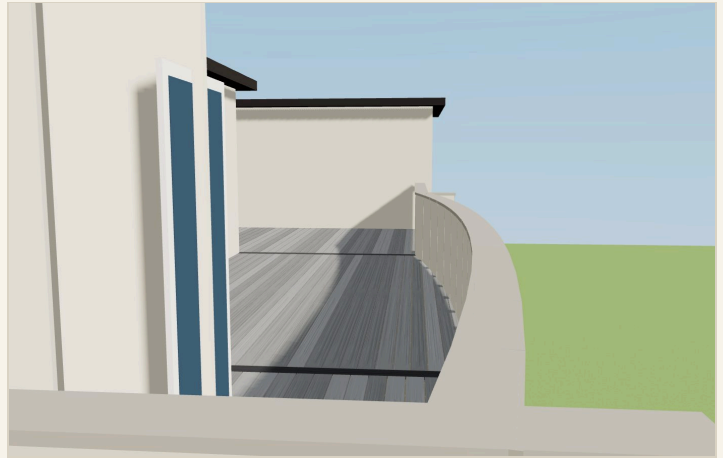


Standing on the deck



Isometric from the stair corner



Isometric from under the frame

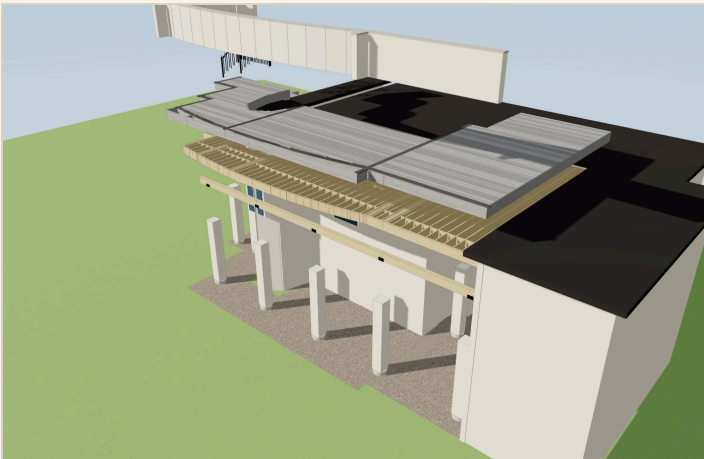

Exploded — every layer




Exploded — from the front corner

## Lower deck







From the front corner

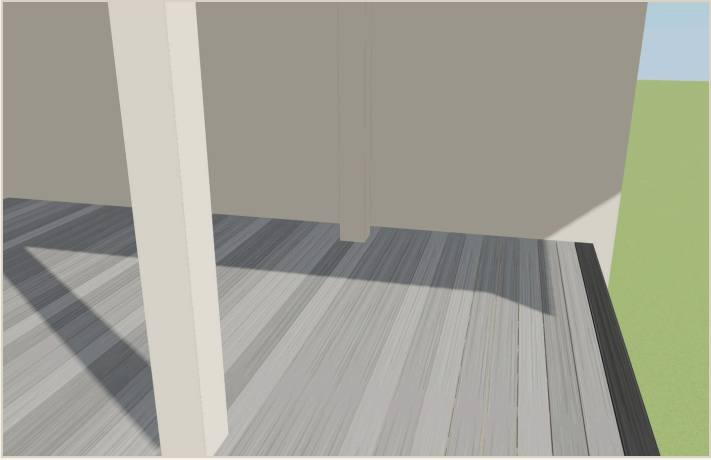


Standing on the deck

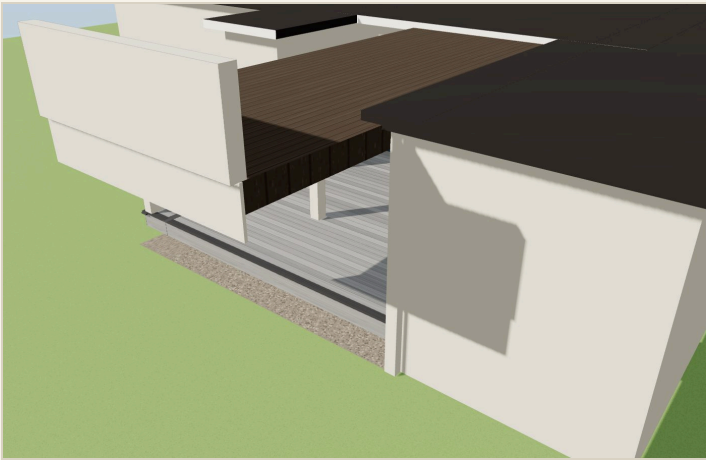

Isometric from the stair corner

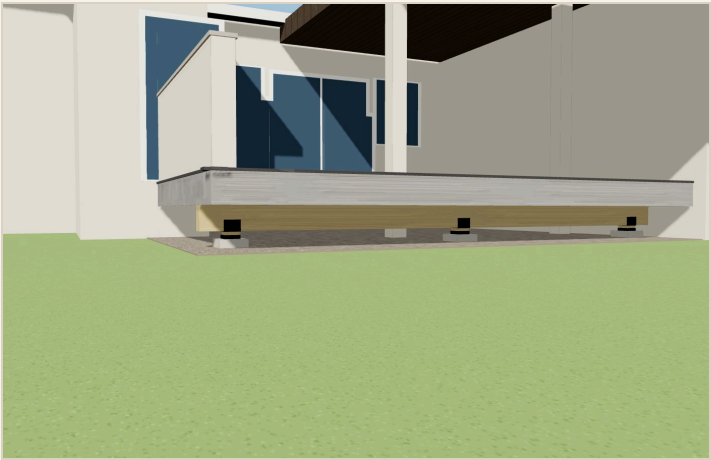

Isometric from under the frame

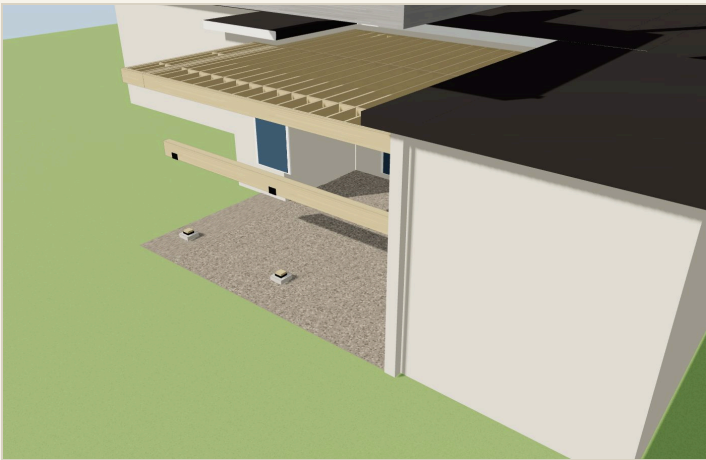

Exploded — every layer



Exploded — from the front corner





| DECK              | CHECK OR ACH     | FINANCED         | MONTHLY        |
|-------------------|------------------|------------------|----------------|
| Upper deck        | \$118,896        | \$127,845        | \$1,484        |
| Lower deck        | \$38,319         | \$41,203         | \$478          |
| <b>Both decks</b> | <b>\$157,215</b> | <b>\$169,048</b> | <b>\$1,962</b> |

Financed: no money down, 12 or 18 months with no payments, then 6.99% for 10 years. Check or ACH saves 7%. Each deck can be done on its own at its own price.

### Upper deck — choices

Each line is the whole difference, installed, against the price above.

| OPTION                                                                                | CHECK OR ACH | FINANCED  | MONTHLY   |
|---------------------------------------------------------------------------------------|--------------|-----------|-----------|
| Replace the stucco parapet with TimberTech Fulton black rail                          | +\$9,997     | +\$10,750 | +\$125/mo |
| Replace the stucco columns with new 8x8 Douglas fir posts on the existing caissons    | +\$4,705     | +\$5,059  | +\$59/mo  |
| Replace the caissons and columns with new concrete caissons and 8x8 Douglas fir posts | +\$11,434    | +\$12,295 | +\$143/mo |
| All three: Fulton rail, new caissons and new posts                                    | +\$21,431    | +\$23,044 | +\$267/mo |

**Engineering — \$1,800 to \$3,000.** Stamped drawings by a Colorado engineer (30 psf snow). GSX provides the engineer and bills the engineering at cost, with no markup. You own the stamped set. It is separate from the deck price above.

### NEXT STEP

Engineering first. This is a quote: the numbers depend on the stamped engineering, so the first step is engineering. GSX provides the Colorado engineer and supplies the design package; you pay GSX the engineer's cost at no markup and you own the stamped set. When the stamped set is in hand, GSX issues a fixed-price proposal on these numbers with the payment terms.

Quote, not a contract: a fixed-price proposal follows the stamped engineering. Quote numbers hold 30 days. Renders and plan are design intent; the stamped engineering set governs structure, dimensions and locations.



The interactive 3D model lives at the online version of this document.

---

GS Exterior Experts · Deck Division

Renders and drawings are design intent; dimensions on the sheets govern. Numbers hold 30 days.