GS EXTERIOR EXPERTS · DECK DIVISION · TAKEOFF + BUILD SET

# 5549 S Lansing Ct · Elevated Deck · Englewood

5549 S Lansing Ct, Englewood · Rachel Chiu · 8' x 12' deck, 10' above the yard, off the existing door · TrueFrame 2x10 @ 16" on a (2)4x10 Douglas fir beam and (2) 6x6 DF #1 posts on Diamond Piers · TimberTech Reserve Driftwood, single picture frame, CONCEALoc · Impression Rail Express, vertical balusters, modern top rail, Bronze

| CHECK OR ACH | FINANCED | MONTHLY | SQUARE FEET | FOOTINGS | RAIL |
|---|---|---|---|---|---|
| **$14,282** | **$15,357** | **$178** | **92** | **2** | **31 LF** |

## DESIGN READS

| | |
|---|---|
| Frame | 7'-9" x 11'-5 1/2" outside to outside |
| Deck | 7'-11 1/8" x 11'-6 9/16" over fascia · 92 SF · 10'-0" above grade |
| Joists | 7 2x10 #1 True Frame Joist SYP GC @ 16" OC x 11'-1" |
| Rims | 2-ply 2x10 front and sides |
| Beam | DROP (2)4x10 DF#1: 7'-8", 2 posts at 9" / 7'-3" (worst 2,214 lb) |
| Posts | 2 x 6x6 Douglas fir #1 with 4x4 knee braces on DP-50/50 |
| Load | 50 psf (40 psf live governs) · engineered |
| Decking | TimberTech Reserve Driftwood — 24 rows parallel to the house, picture frame in Reserve Driftwood, 3/16" gaps, CONCEALoc |
| Rail | IRX Baluster 36" Bronze: 5 bays, 6 posts, 31 LF |

- nominal 8'-0" x 12'-0" -> frame 7'-9" x 11'-5 1/2": field boards cut to 7'-0", 24 full rows, deck over fascia 7'-11 1/8" x 11'-6 9/16"
- 2'-3 1/2" cantilever past the drop beam exceeds L/4 of the 9'-0 1/2" back-span — engineered condition (owner-directed)

## SITE & CODE FLAGS internal

| | | |
|---|---|---|
| ENGINEER | ENGINEERING | DROP (2)4x10 DF#1: (2)4x10 not in IRC R507.5 — treated as (3)2x10; engineer to confirm IRC Table R507.5 |
| ENGINEER | LEDGER | house floor cantilevers past the foundation — ledger attachment to a cantilevered floor needs an engineered detail or a freestanding deck IRC R507.9.1 |

| | | |
|---|---|---|
| ENGINEER | LEDGER | Arapahoe County deck guide: a ledger 'shall not be attached to a cantilevered floor' — attachment to a cantilever requires engineer approval. The 2' second-floor cantilever runs the full rear wall (assessor sketch): the stamped design either details the ledger into the cantilevered joists / blocking with the lateral ties back to the floor system, or makes the deck freestanding (a second beam on two posts at the house) AC-amended ICC Deck Guide (2021 IRC) / IRC R507.9.1 |
| CODE | FOOTING | county guide: pier footings 12" x 36" minimum unless engineered — submit the Diamond Pier DP-50 evaluation report as the engineered alternate (frost 36") and have the engineer list it on the stamped set Arapahoe deck permit guide (rev. 8/20/2024) / IRC R403.1.4 |
| CODE | RAIL | guards above 30": 36" min., openings under 4", 200 lb point load + 50 psf infill — submit the TimberTech Impression Rail Express code report / ESR IRC R312 / Table R301.5 |
| CODE | SUBMITTAL | county submittal: site plan with lot / block and distances to every line, scaled drawings with every span, member, hanger, beam build-up and post anchorage, ledger fastener type / size / spacing, the completed county-amended ICC deck guide (page 3), and the engineer's stamp (outside the IRC tables: cantilever attachment, 2-post (2)4x10) Arapahoe Residential Deck Permit guide (rev. 8/20/2024) |
| CHECK | SETBACK | easement on record: Check plat R1535678 for rear / side utility and drainage easements — no footings or structure inside it plat |
| CHECK | FOOTING | Diamond Pier: pins 50" — locate utilities (811) before driving; bearing 2,214 lb/post vs 3,300 lb allowable (manufacturer chart, confirm) |
| CHECK | LEDGER | verify the rim board behind the ledger is solid 2x/LVL/engineered rim (not I-joist web or a hollow band) before the ledger fasteners go in IRC R507.9.1.1 |
| CHECK | SETBACK | R-P PUD Cherry Creek Vista: rear setback 20' for single-family detached, 10' under the Units 6 & 13 standard (the lot is 6,401 SF, under the 7,000 SF SFD minimum). GIS puts the new deck ~13' off the west line — passes at 10', fails at 20'. Decks get no projection allowance (LDC). Zoning Division to confirm the column and which line is the rear (corner lot) before submittal; pull P75-028 and plat R1535678 2nd Amended PDP P75-027 (1975) / Arapahoe LDC |
| CHECK | SETBACK | corner lot: E Berry Ave street side needs 10' — deck ~23'-8" clear; south interior side 5' — deck ~33' clear PDP P75-027 |
| CHECK | SITE | HOA: Cherry Creek Vista II HOA (PO Box 3361, Englewood 80155, 303-770-1469) — confirm whether architectural approval is needed county GIS |
| CHECK | SITE | 811 locate before the piers · FEMA zone X · not in the county's draft wildfire-resiliency area (no WUI requirements) · South Metro Fire Rescue Colorado 811 / FEMA / Arapahoe GIS |
| INFO | SETBACK | HOA — architectural approval before start (color, rail, height) |

| | | |
|---|---|---|
| INFO | ENGINEERING | posts 8'-0 1/16": 4x4 knee braces both directions at every post are in the takeoff — engineer confirms the lateral design DCA6 / IRC R507.4 |
| INFO | LEDGER | lateral: 4 x DTT1Z (750 lb each) into house floor framing IRC R507.9.2 |
| INFO | WIND | basic wind speed 115 mph — standard connectors |
| INFO | SITE | keep any basement egress window under or near the deck clear (county guide) Arapahoe deck permit guide |

**THE ORDER** Decks & Docks · GSEXT1 · ship to the job

## Lumber

| NET | ORDER | UNIT | ITEM | WHY |
|---|---|---|---|---|
| 15 | **16** | ea | 2x10x12 #1 True Frame Joist SYP GC | +1 cull (5 field joist · 2 PF joist · 2 left rim ply · 2 right rim ply · 2 blocking, front rim ply · knee-brace block, ledger, rail post block · rail post block) |
| 2 | **2** | ea | 4x10x8 Douglas Fir #1 | exact (2 drop beam: DROP (2)4x10 DF#1) |
| 2 | **2** | ea | 6x6x10 Douglas Fir #1 | exact (yields 2 posts at ~8'-0 1/16") |
| 2 | **3** | ea | 4x4x8 Douglas Fir #1 — knee braces | +1 (4 braces at 3'-9 15/16", 45° plumb cuts, 2'-6" legs: one along the beam, one up to the joists at every post) |

## Footings

| NET | ORDER | UNIT | ITEM | WHY |
|---|---|---|---|---|
| 2 | **2** | ea | Diamond Pier DP-50/50 (head + 4 x 50" pins, plugs, caps) | exact — confirm stock |
| 2 | **2** | ea | Simpson ABA66Z adjustable post base 6x6 on the pier bolt | exact |

## Hardware

| NET | ORDER | UNIT | ITEM | WHY |
|---|---|---|---|---|
| 4 | **5** | ea | 1/2" x 10" HDG hex bolt + nut + 2 washers — knee braces (brace to the 6x6 post) | +1 |
| 2 | **3** | ea | 1/2" x 12" HDG hex bolt + nut + 2 washers — knee braces (brace to the (2)4x beam) | +1 |
| 2 | **3** | ea | 1/2" x 6" HDG hex bolt + nut + 2 washers — knee braces (brace to the joist block) | +1 |
| 14 | **14** | ea | Simpson LUS28Z face-mount hanger 2x8/2x10 | exact (7 joists x 2 ends) |
| 4 | **4** | ea | Simpson HUCQ210-2-SDS concealed-flange double 2x10 hanger (SDS screws included) | exact (2 side rims x 2 ends) — confirm stock |
| 1 | **1** | box | Camo 9ga HDG hanger nail 3" 5 lb (~350) | 84 needed of ~350 |
| 1 | **1** | box | Camo 9ga HDG hanger nail 1-1/2" 5 lb (~650) | 146 needed of ~650 |
| 1 | **1** | box | FastenMaster LedgerLOK 3-5/8" 50 ct | 9 needed |

| NET | ORDER | UNIT | ITEM | WHY |
|---|---|---|---|---|
| 4 | **4** | ea | Simpson DTT1Z lateral tie kit w/ SDS screws | exact (2 near each end of every ledger, into house floor framing) |
| 9 | **9** | ea | Simpson H2.5AZ hurricane tie (joists to the drop beam, hidden) | exact (7 joists + 2 rims at each drop beam) |
| 2 | **2** | ea | Simpson CCQ column cap, 7" seat for the (2)4x10 beam on a 6x6 post (SDS screws incl.) — confirm SKU / engineer's equal | exact |
| 10 | **12** | ea | 1/2" x 8" HDG carriage bolt + nut + washer | +2 ((2)4x beam plies through-bolted, 2 rows staggered @ 24" OC, 2" from top and bottom) |
| 1 | **1** | box | Simpson SD10212R100 #10 x 2-1/2" connector screw 100 ct | 24 needed (bases 24 · caps 0) |
| 1 | **1** | box | GRK RSS #10 x 3-1/8" structural screw 100 ct | 94 needed (laminations 70 · blocking 24) |
| 1 | **1** | box | FastenMaster HeadLOK 6" (50 ct) — rail posts 4 ea | 24 needed (6 rail posts x 4) |

### Flashing & waterproofing

| NET | ORDER | UNIT | ITEM | WHY |
|---|---|---|---|---|
| 1 | **1** | set | Ledger flashing set: SA membrane 6"x75' + (2) 10' alum. Z + end dams | exact |
| 2 | **2** | roll | Nichigo G-Tape 3035 2" x 65' black | 93' needed of 130' |
| 1 | **1** | roll | Nichigo G-Tape 3035 4" x 65' black | 38' needed of 65' |

### Decking

| NET | ORDER | UNIT | ITEM | WHY |
|---|---|---|---|---|
| 12 | **14** | ea | TimberTech Reserve Driftwood 1x6x16 Grooved | +2 (A: 24 rows @ 7'-0", 2 per 16' board) |
| 1 | **1** | ea | TimberTech Reserve Driftwood 1x6x12 Square Edge — borders | exact (right border 11'-6 9/16") |
| 1 | **2** | ea | TimberTech Reserve Driftwood 1x6x20 Square Edge — borders | +1 (left border 11'-6 9/16" + front border 7'-11 1/8") |

### Fasteners

| NET | ORDER | UNIT | ITEM | WHY |
|---|---|---|---|---|
| 1 | **1** | box | TimberTech CONCEALoc hidden fastener 500 ct (screws incl.) | 168 needed · 500 supplied |
| 1 | **1** | box | Starborn Cap-Tor xd 2-3/4" Epoxy Driftwood 350 ct | 106 screws needed (first row 7 · border 58 · fascia 41) |

### Fascia

| NET | ORDER | UNIT | ITEM | WHY |
|---|---|---|---|---|
| 3 | **4** | ea | TimberTech Reserve Fascia Driftwood 0.58x11.95x12 | +1 (left fascia 11'-6 1/16" · right fascia 11'-6 1/16" · front fascia 7'-10 3/16") |

### Rail

| NET | ORDER | UNIT | ITEM | WHY |
|---|---|---|---|---|
| 4 | **4** | ea | TimberTech Impression Rail Express 6' x 36" level kit, vertical square aluminum balusters, modern top rail, Bronze | exact (cut to 5'-3 3/4") |
| 1 | **1** | ea | TimberTech Impression Rail Express 8' x 36" level kit, vertical square aluminum balusters, modern top rail, Bronze | exact (cut to 7'-1 1/2") |
| 6 | **6** | kit | TimberTech Impression Rail Express 2" aluminum post kit 36" (post, base, cap, skirt), Bronze | exact (2 CORNER, 2 END, 2 LINE) |
| 1 | **1** | ea | TimberTech Bronze touch-up paint (cut ends) | exact |

### Site

| NET | ORDER | UNIT | ITEM | WHY |
|---|---|---|---|---|
| 64 | **64** | SF | Demo existing deck + haul-off | labor line — field verify the existing deck |

## FASTENER & CONNECTOR SCHEDULE

| | |
|---|---|
| Knee braces | 4x4 DF #1 at 45°, 2'-6" legs, both directions at every post: one along the beam toward mid-span, one toward the house up to a 2x10 block between the joists; (1) 1/2" through-bolt each end, 2" min. edge distance |
| Ledger | 2x10 ledger x 7'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 9 fasteners |
| Beam | (2)4x plies through-bolted with 1/2" HDG bolts, 2 rows 2" from top and bottom, staggered @ 24" OC, a bolt pair 6" from each end; CCQ cap with SDS screws at each post |
| Joist tape | G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s) |
| Field | CONCEALoc at every joist in every gap (168) |
| Face screws | Cap-Tor xd color-matched ONLY at: first row 1 per joist on the house edge · borders 2 per bearing point @ 16" · fascia 2 at each board end then alternate top/bottom every 12", pre-drilled |
| Rail | IRX Baluster 36" — 6 posts (2 CORNER, 2 END, 2 LINE) surface-mounted on the decking over a 2x blocking pair between the rim plies and the PF joist at every post, (4) HeadLOK 6" per post through the base |

### ▼ Cut list

| MEMBER | STOCK | LENGTH | QTY | NOTE |
|---|---|---|---|---|
| Field joists | 2x10 | 11'-1" | 5 | @ 16" OC, crown up |
| Picture-frame joists | 2x10 | 11'-1" | 2 | centre 5 1/4" from each frame face |
| Side rim plies | 2x10 | 11'-1" | 4 | 2-ply, laminated on the ground with RSS 2 rows @ 12" staggered |
| Front rim plies | 2x10 | 7'-9" | 2 | inner ply takes the hangers; outer ply laminated after |
| Ledger | 2x10 | 7'-9" | 1 | top at deck height less board thickness; membrane behind, flashing over |

| MEMBER | STOCK | LENGTH | QTY | NOTE |
|---|---|---|---|---|
| Blocking | 2x10 | 1'-2 1/2" | 6 | 1 row at 9'-2" from the wall |
| Field boards run A | Reserve Driftwood | 7'-0" | 24 | boards run parallel to the house |
| DROP (2)4x10 DF#1 beam | 4x10 | 7'-8" | 2 | y 9'-2"; posts at 9" / 7'-3" |
| Posts under DROP (2)4x10 DF#1 | 6x6 | 8'-0 1/16" | 2 | field-measure each |
| Knee braces | 4x4 | 3'-9 15/16" | 4 | 45° both ends, 2'-6" legs · along the beam toward mid-span + up to a block between the joists |
| Left border | Reserve Driftwood square | 11'-6 9/16" | 1 | mitre at the corners; dividers on the doubled joist |
| Right border | Reserve Driftwood square | 11'-6 9/16" | 1 | mitre at the corners; dividers on the doubled joist |
| Front border | Reserve Driftwood square | 7'-11 1/8" | 1 | mitre at the corners; dividers on the doubled joist |
| Left fascia | fascia | 11'-6 1/16" | 1 | flush under the board nose; full board at the front corners, short piece at the house |
| Right fascia | fascia | 11'-6 1/16" | 1 | flush under the board nose; full board at the front corners, short piece at the house |
| Front fascia | fascia | 7'-10 3/16" | 1 | flush under the board nose; full board at the front corners, short piece at the house |

**THE STACK** internal

| | |
|---|---|
| Materials (raw) | $5,223.23 |
| Materials × 1.15 | $6,006.71 |
| Sales tax 4.25% on factored materials | $255.29 |
| Labor (rate card) | $2,504.00 |
| Work — carries the margin | $8,766.00 |
| General conditions at cost | $368.00 |
| Cost | $9,134.00 |
| Sell — check or ACH at 37.0% GM (blended — 31 LF rail at $114.29/LF ($3,543), everything else at 37.0% GM) | **$14,282** · $155.24/SF |
| Sell at the 40% floor (the deck at 40%, rail at its rate) | $14,801 |
| Financed | **$15,357** · $178/mo at 6.99% × 10 yr |
| Gross profit | $5,148 |
| Engineering — outside the price, at cost | $1,800–$3,000 |

## Labor

| LINE | QTY | UNIT | RATE | EXT |
|---|---|---|---|---|
| Demolition — existing deck | 64 | SF | $2.00 | $128.00 |
| Diamond Pier install (replaces caisson) | 2 | pier | $50.00 | $100.00 |
| Frame | 92 | SF | $10.00 | $920.00 |
| Decking & fascia | 92 | SF | $8.00 | $736.00 |
| Railing | 31 | LF | $20.00 | $620.00 |

## General conditions — at cost, no margin

| ITEM | AMOUNT | WHY |
|---|---|---|
| General conditions | $368 | $4/SF x 92 SF |

## What the price includes — sell values

| ITEM | VALUE |
|---|---|
| Demolition & haul-off | $203 |
| Foundation & structure | $5,537 |
| Decking & fascia | $4,631 |
| Railing | $3,543 |
| Site & project services | $368 |
| **Total, check or ACH** | **$14,282** |
| **Total, financed** | **$15,357** |

**THE QUOTE** homeowner-facing · facts only

QUOTE · PRE-ENGINEERING

## 5549 S LANSING CT — ELEVATED DECK, 8' X 12' AT 10' (TIMBERTECH RESERVE DRIFTWOOD, IRX BRONZE)

2x10 SYP frame at 16", (2)4x10 beam, 6x6 posts — on 2 Diamond Pier footings. TimberTech Reserve Driftwood decking, Impression Rail Express, vertical balusters, modern top rail rail.

**92 SF** · 1 zone · **10'-0"** above grade, engineered · **30 psf** snow design

Prepared for Rachel Chiu · 5549 S Lansing Ct, Englewood

### PRICE

**Total investment $15,357** — financed, no money down

- 12 months no payments, no down payment
- 18 months no payments, no down payment
- 6.99% for 10 years — about $178/month

**Check or ACH: $14,282** (7% savings)

### WHAT THE PRICE INCLUDES

| ITEM | VALUE |
|---|---|
| Demolition & haul-off | $203 |
| Foundation & structure | $5,537 |
| Decking & fascia | $4,631 |
| Railing | $3,543 |
| Site & project services | $368 |
| **Total, check or ACH** | **$14,282** |
| **Total, financed** | **$15,357** |

**Engineering — $1,800 to $3,000.** Stamped drawings by a Colorado engineer (30 psf snow). GSX provides the engineer and bills the engineering at cost, with no markup. You own the stamped set. It is separate from the deck price above.

### INCLUDED — WHAT IT IS

| ELEMENT | SELECTION |
|---|---|
| Decking | TimberTech Composite Reserve, Driftwood. Grooved boards, 3/16" gaps, matching fascia. Class C, not WUI; 30-yr product / 30-yr fade & stain. |
| Railing | TimberTech Impression Rail Express, vertical balusters, modern top rail, Bronze, 36". 31 LF. |
| Frame | 7 2x10 #1 True Frame Joist SYP GC @ 16" OC x 11'-1"; 2-ply 2x10 front and sides; DROP (2)4x10 DF#1: 7'-8", 2 posts at 9" / 7'-3" (worst 2,214 lb). |
| Foundation | 2 Diamond Pier foundations (DP-50/50) — no excavation. |

| ELEMENT | SELECTION |
|---|---|
| Design load | 30 psf snow, stamped by a Colorado engineer. |
| Hardware | Simpson ZMAX galvanized connectors. CONCEALoc fasteners. |
| Site | The existing deck removed and hauled off. |

## PLAN

7'-9" x 11'-5 1/2" outside to outside · 92 SF · 10'-0" above grade · 31 LF rail

## SCHEDULE

1. Engineering & ordering (2–3 weeks). Stamped drawings, materials ordered, samples approved.
2. Day 1 — protection, utilities located (811), old deck out.
3. Day 2 — layout, 2 Diamond Piers driven, ledger set.
4. Days 3–4 — posts and beams set.
5. Days 5–6 — frame, flashing at every wall.
6. Days 7–8 — decking, borders first.
7. Days 9–9 — IRX Baluster rail.
8. Day 10 — final clean; end of construction.

## NEXT STEP

Engineering first. This is a quote: the numbers depend on the stamped engineering, so the first step is engineering. GSX provides the Colorado engineer and supplies the design package; you pay GSX the engineer's cost at no markup and you own the stamped set. When the stamped set is in hand, GSX issues a fixed-price proposal on these numbers with the payment terms.

Quote, not a contract: a fixed-price proposal follows the stamped engineering. Quote numbers hold 30 days. Renders and plan are design intent; the stamped engineering set governs structure, dimensions and locations.


## RENDERS 3D model · design intent · frame shown as specified



From the yard



From the front corner

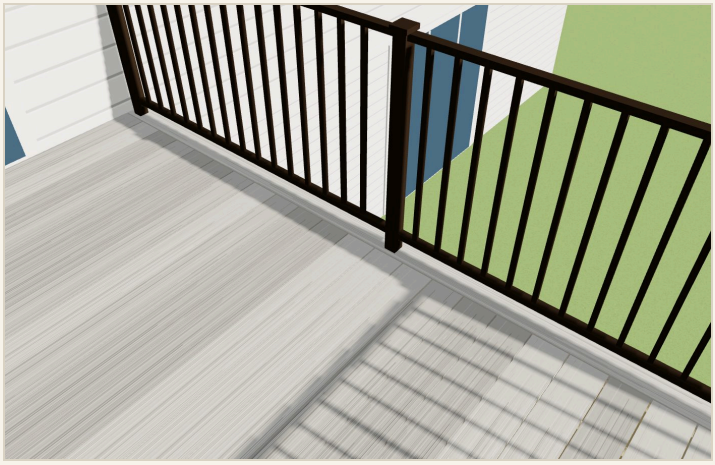

Standing on the deck



Under the deck — posts, beams, footings

## SUN AND SHADE

the real sun at this address · the covers and the blinds through the day



Jul 15 · 9 AM — sun E, 35° up



Jul 15 · 12 PM — sun SE, 67° up



Jul 15 · 3 PM — sun WSW, 60° up



Jul 15 · 6 PM — sun W, 26° up



Dec 21 · 3 PM — sun SW, 14° up

## ISOMETRICS



Isometric from the stair corner




Isometric from the open corner



Low isometric




Isometric from under the frame

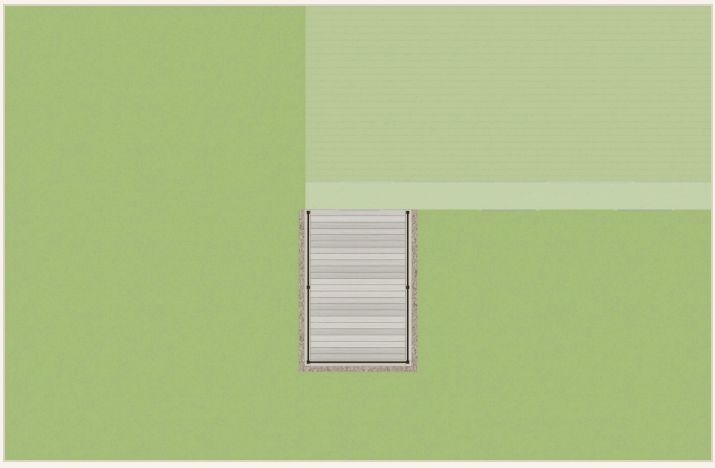


Plan from above


## EXPLODED

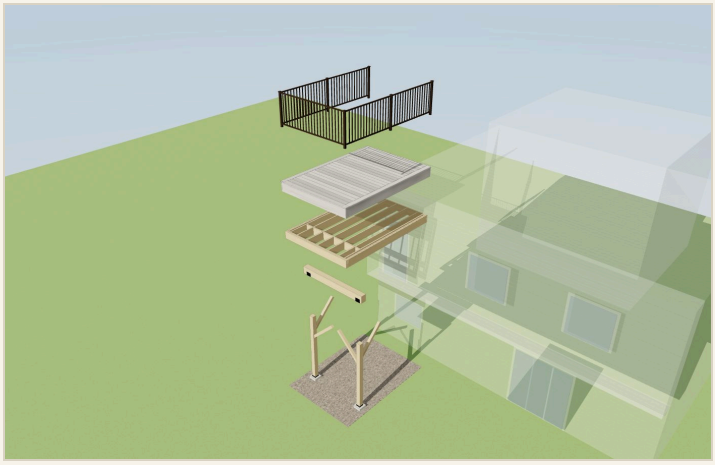


Exploded — every layer

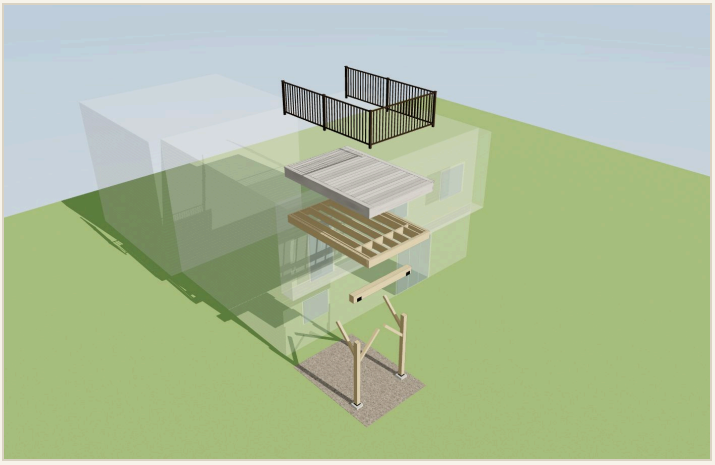

Exploded — from the open corner

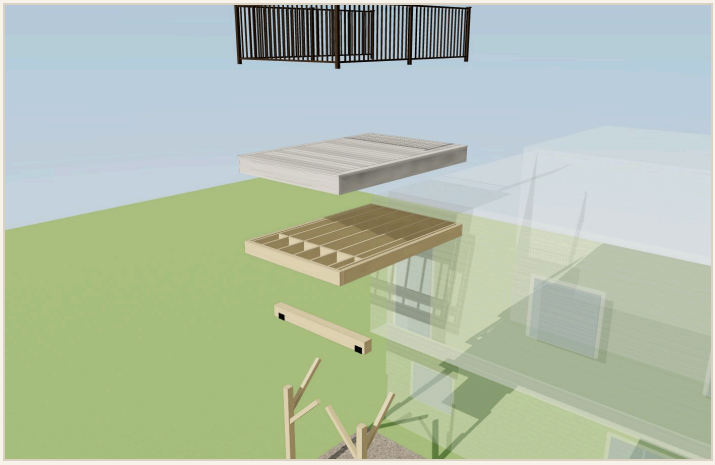

Exploded — from the front corner

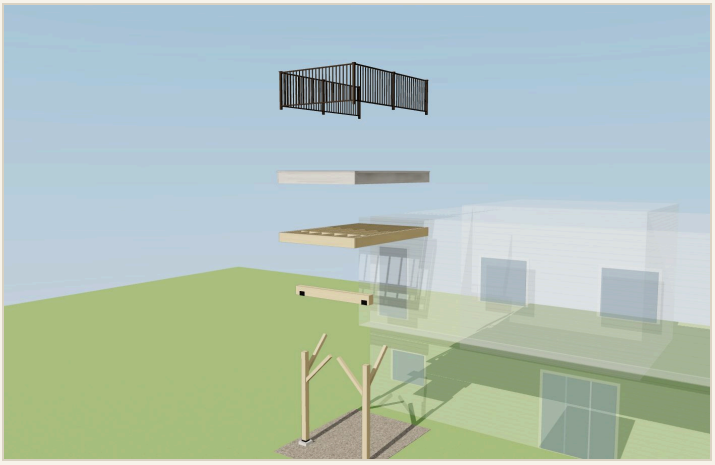

Exploded — low angle

## G-001 General notes · design criteria

# G-001 GENERAL NOTES · DESIGN CRITERIA

Loads, codes, structure summary, sheet index, site — the permit-set cover

5549 S Lansing Ct — elevated deck, 8' x 12' at 10' (TimberTech...

GSX · Jade Pender 303-550-9558 · October 17, 2026 · Rev 0 FOR REVIEW

### PROJECT

5549 S Lansing Ct — elevated deck, 8' x 12' at 10' (TimberTech Reserve Driftwood, IRX bronze)
5549 S Lansing Ct, Englewood CO 80111
Prepared for Rachel Chiu
92 SF · 10'-0" above grade · 1 zone

### DESIGN CRITERIA

| | |
|---|---|
| **Deck live load** | 40 psf uniform (IRC Table R301.5); guards 200 lb concentrated / 50 plf |
| **Ground snow** | 30 psf (ground; deck design uses the larger of snow and live) — 40 psf live governs; 30 psf ground snow, roof 30 psf non-reducible (Arapahoe County design criteria); deck tables at 40 psf live + 10 psf dead |
| **Dead load** | 10 psf deck |
| **Roof snow (cover)** | — |
| **Design total** | 50 psf on the deck |
| **Wind** | 115 mph Vult (3-second gust), Exposure B (suburban), Risk Cat. II — county design-criteria table (2015 cycle; confirm the 2021 table) |
| **Frost depth** | 3'-0" (footings bear below) |
| **Soil bearing** | 1,500 psf presumptive (IRC R401.4.1) — no soils report |
| **Seismic** | B |
| **Wildfire (WUI)** | not in a WUI zone |
| **Codes** | 2021 IRC / IBC as adopted by Arapahoe County (Res. 21-394, eff. 4/1/2022); IRC R507 decks with the county-amended Colorado ICC Deck Building Guide; ASCE 7-16 loads; Tables R507.5 / R507.6 / R507.4 / R507.9 |
| **Engineering** | Stamped structural set by a Colorado PE required — the stamped set governs |

### STRUCTURE

| | |
|---|---|
| **Footings** | DP-50/50 |
| **Posts** | 2 x 6x6 Douglas fir #1 with 4x4 knee braces |
| **Beams** | DROP (2)4x10 DF#1: 7'-8", 2 posts at 9" / 7'-3" (worst 2,214 lb) |
| **Joists** | 7 2x10 #1 True Frame Joist SYP GC @ 16" OC x 11'-1" |
| **Rims** | 2-ply 2x10 front and sides |
| **Ledger** | 2x10 ledger x 7'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 9 fasteners |
| **Decking** | TimberTech Reserve Driftwood — 24 rows parallel to the house, picture frame in Reserve Driftwood, 3/16" gaps, CONCEALoc |
| **Rail** | IRX Baluster 36" Bronze: 5 bays, 6 posts, 31 LF |

### SHEET INDEX


| | |
|---|---|
| G-001 | General notes · design criteria |
| C-100 | Site plan |
| A-001 | Isometric · renders |
| A-002 | Isometric — assembled, labeled |
| A-003 | Isometric — exploded, labeled |
| S-100 | Foundation plan |
| S-101 | Framing plan |
| S-102 | Structure isometric, labeled |
| A-101 | Decking plan |
| A-201 | Railing plan + elevation |
| A-202 | Elevations |
| A-301 | Section + front elevation |
| D-501 | Details |
| T-400 | Build steps (build set) |
| T-700 | Order + schedules (takeoff) |


### SITE

Rear / front lot line: deck edge 13.0' from the line, setback per the PUD...
Side lot line: deck edge 23.7' from the line, 5' required
Easement: Check plat R1535678 for rear / side utility and drainage...
Unincorporated Arapahoe County (Cherry Creek CDP; Englewood mailing address). Parcel 2075-14-4-05-001 / PIN 031772427, Lot 41 Blk 9 Cherry Creek Vista 6th Flg Amend Resub (plat R1535678), 6,401 SF corner lot (front S Lansing Ct east, street side E Berry Ave north). R-P PUD Cherry Creek Vista (Z75-030 / P75-027 / P75-028). Deck on the WEST (rear) wall, north end, hung on the 2' second-floor cantilever that runs the full 33' wall (assessor sketch). Tax: CO 2.9 + RTD 1.0 + CD 0.1 + Arapahoe 0.25 = 4.25% (no city).

### FLAGS (INTERNAL — remove before the permit submittal)


| | |
|---|---|
| ENGINEER | DROP (2)4x10 DF#1: (2)4x10 not in IRC R507.5 — treated as... |
| ENGINEER | house floor cantilevers past the foundation — ledger attachment... |
| ENGINEER | Arapahoe County deck guide: a ledger 'shall not be attached to a... |
| CODE | county guide: pier footings 12" x 36" minimum unless engineered —... |
| CODE | guards above 30": 36" min., openings under 4", 200 lb point load... |
| CODE | county submittal: site plan with lot / block and distances to... |

# C-100 SITE PLAN

Parcel, existing house, new decks and roof covers, distances to the lot lines, coverage

5549 S Lansing Ct — elevated deck, 8' x 12' at 10' (TimberTech...

GSX · Jade Pender 303-550-9558 · October 17, 2026 · Rev 0 FOR REVIEW

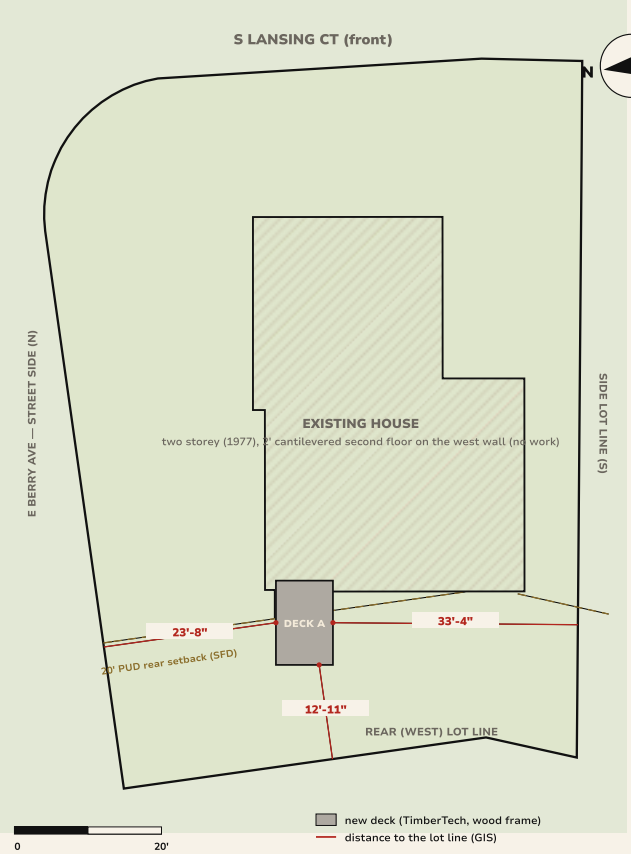


## PARCEL

5549 S Lansing Ct, Englewood CO 80111
Parcel 2075-14-4-05-001 · PIN 031772427
Lot 41, Block 9, Cherry Creek Vista 6th Filing Amended Resub (plat R1535678)
Unincorporated Arapahoe County · zoning R-P PUD (Z75-030 / P75-027 / P75-028)
Lot 6,401 SF (GIS) · corner lot · flood zone X
House 1977, 2 storey, 1,704 SF + 660 SF basement + 441 SF garage (assessor)
HOA: Cherry Creek Vista II

## LOT COVERAGE

| | |
|---|---|
| **Lot area** | 6,401 SF |
| **Lot coverage limit** | none in the PUD plan |
| **Existing deck (assessor)** | 48 SF (8' x 6') — removed |
| **New deck** | 8' x 12' · ~92 SF of frame, 10' above grade |

## SETBACKS

Elevated decks get no setback projection allowance (Arapahoe LDC) — the deck must meet the setbacks
GIS puts the new deck front ~13' off the west line: passes the 10' standard, not the 20' — confirm the governing column and the rear line (corner lot) with Zoning before submittal
E Berry Ave street side 10' required — ~23'-8" clear; south side 5' — ~33' clear
Measured (red): to the nearest lot line from the new work — GIS, not survey

## SITE WORK

· Remove the existing 8' x 6' deck and its two posts / pads; haul off
· Two Diamond Pier DP-50 foundations (no excavation spoils), 6x6 DF #1 posts with 4x4 knee braces
· New ledger on the 2' cantilevered second floor per the engineer's detail; membrane + Z-flash, (4) DTT1Z lateral ties
· No stairs — the deck is reached from the house door only
· Call 811 before the piers; protect the lawn and the patio slab at the north wall


Arapahoe County GIS (address point, parcel, 2024 roof prints, R-P zoning, jurisdiction, flood, wildfire layers), county assessor record and sketch, 2nd Amended PDP P75-027 setback table, county deck permit guide (rev. 8/20/2024) and the county-amended ICC deck guide. GIS lines are not a survey — an ILC governs if Zoning asks.

# A-002 ISOMETRIC — ASSEMBLED, LABELED

Everything you see called out: piers, decking, picture frame, skirt, stair, roof covers, finishes

5549 S Lansing Ct — elevated deck, 8' x 12' at 10' (TimberTech...

GSX · Jade Pender 303-550-9558 · October 17, 2026 · Rev 0 FOR REVIEW

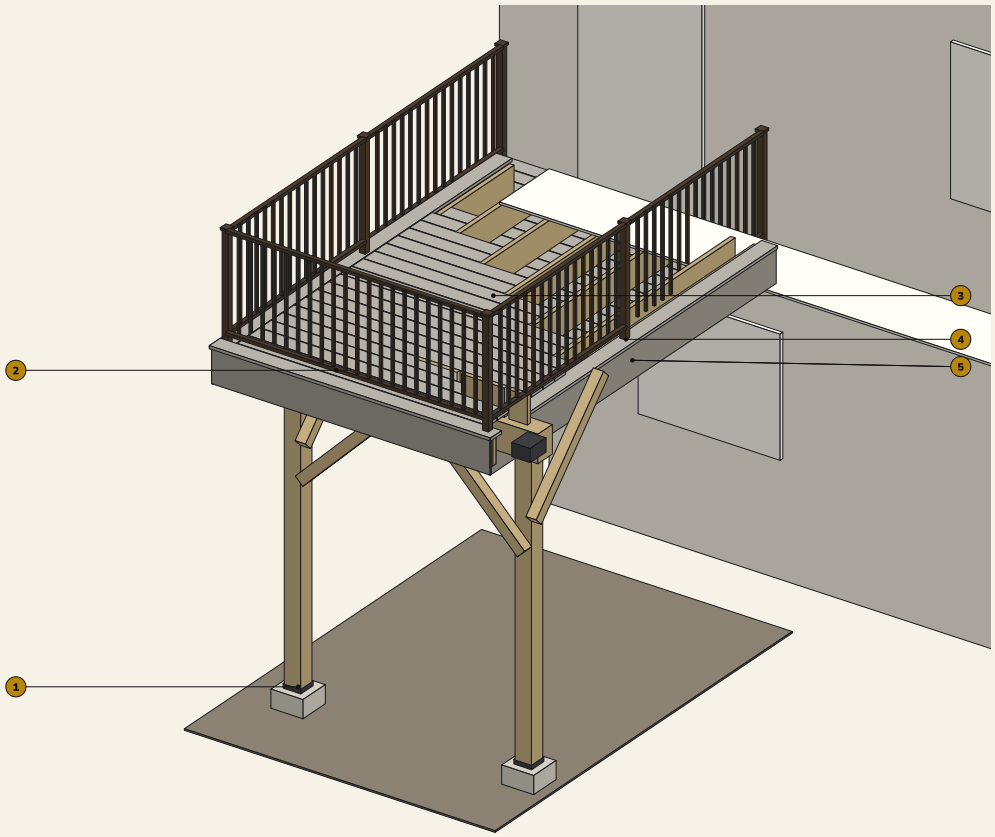


**KEY**

1. Diamond Pier DP-50/50 — head + 4 driven pins (frost-protected, no excavation)
2. 4x4 DF #1 knee brace at 45°, both directions, through-bolted
3. TimberTech Reserve Driftwood field decking, hidden fasteners
4. Picture frame + breaker boards — TimberTech Reserve Driftwood
5. Fascia

House shown for context only (the deck work only). The frame under the decking is called out on S-102 and A-003.

Axonometric · not to scale · the model the plans are drawn from


Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

# A-003 ISOMETRIC — EXPLODED, LABELED

Each build layer lifted in order: piers · posts + knee braces · beams · frame · decking · rail

5549 S Lansing Ct — elevated deck, 8' x 12' at 10' (TimberTech...

GSX · Jade Pender 303-550-9558 · October 17, 2026 · Rev 0 FOR REVIEW

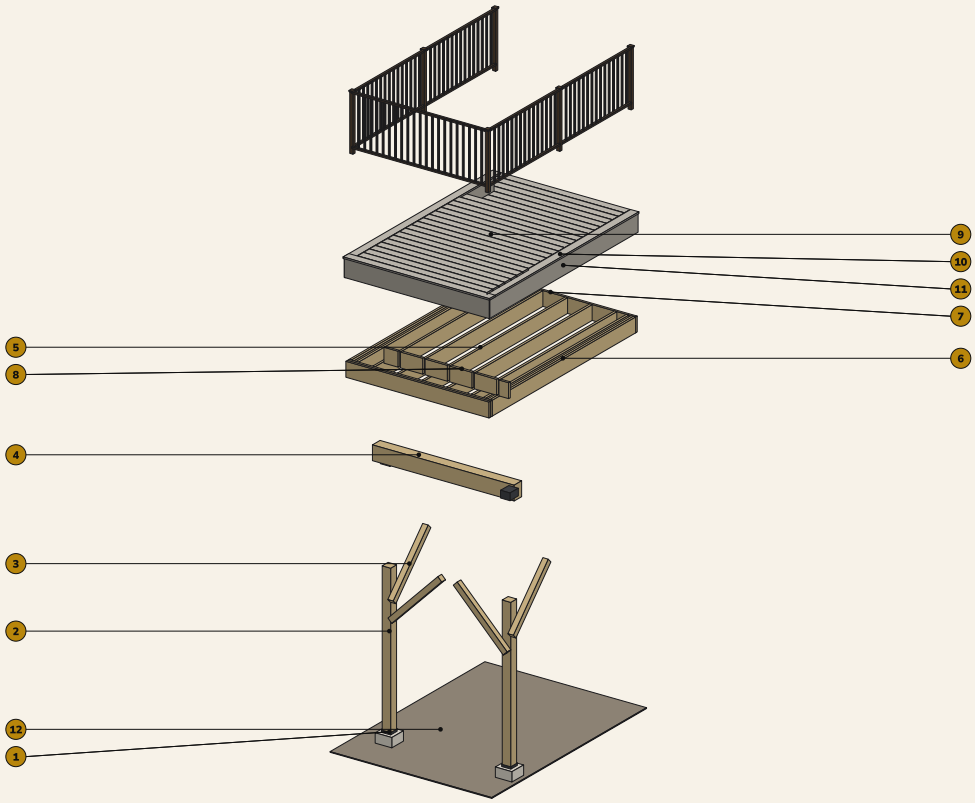


**KEY**

1. Diamond Pier DP-50/50 — head + 4 driven pins (frost-protected, no excavation)
2. 6x6 Douglas fir #1 post on a ABA66Z standoff base
3. 4x4 DF #1 knee brace at 45°, both directions, through-bolted
4. Beam
5. 2x10 joist
6. Rim
7. Ledger
8. Blocking
9. TimberTech Reserve Driftwood field decking, hidden fasteners
10. Picture frame + breaker boards — TimberTech Reserve Driftwood
11. Fascia
12. Gravel over 6-mil poly under the decks

Layers lifted in build order. Lifts are for clarity only; every member returns straight down to its place.

Axonometric · not to scale · the model the plans are drawn from


Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

# S-100 FOUNDATION PLAN

Footings, posts and beam lines with the footing schedule; beams dashed (below the joists)

5549 S Lansing Ct — elevated deck, 8' x 12' at 10' (TimberTech...

GSX · Jade Pender 303-550-9558 · October 17, 2026 · Rev 0 FOR REVIEW

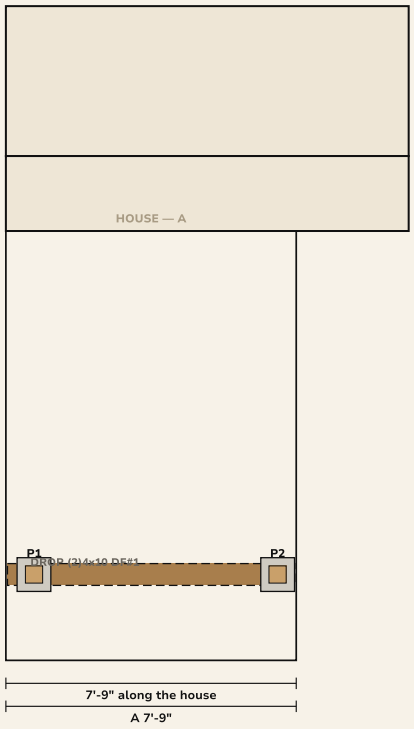


## FOOTING SCHEDULE

Diamond Pier DP-50/50 (head + 4 x 50" pins), 3,300 lb allowable

| ID | X | Y | ZONE | LOAD |
|---|---|---|---|---|
| P1 | 9" | 9'-2" | A | 2,214 lb |
| P2 | 7'-3" | 9'-2" | A | 2,214 lb |

x from the left frame face facing the house; y from the reference wall.
Frost 3'-0" · soil 1,500 psf · worst post 2,214 lb

Plan · not to scale · house at the top · dimensions govern


Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

# S-101 FRAMING PLAN

Ledger, joists, rims, blocking, beams; every member in the model — the cut list is on T-600

5549 S Lansing Ct — elevated deck, 8' x 12' at 10' (TimberTech...

GSX · Jade Pender 303-550-9558 · October 17, 2026 · Rev 0 FOR REVIEW

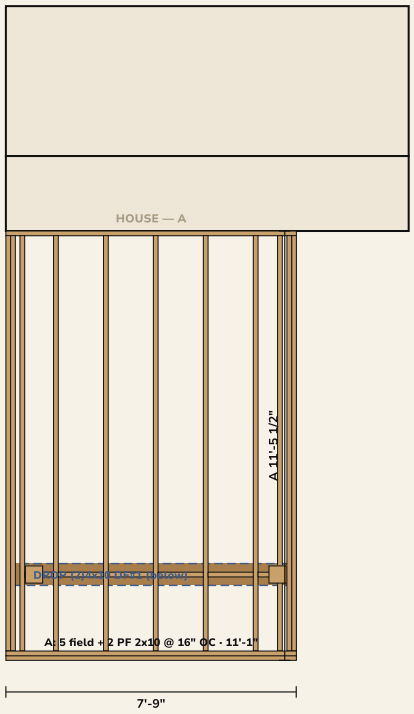


## FRAMING NOTES

7 2x10 #1 True Frame Joist SYP GC @ 16" OC x 11'-1"

2-ply 2x10 front and sides

2x10 ledger x 7'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 9 fasteners

blocking one row over the beam, staggered

G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)

DROP (2)4x10 DF#1: 7'-8", 2 posts at 9" / 7'-3" (worst 2,214 lb)

Connectors:

1/2" x 10" HDG hex bolt + nut + 2 washers — knee braces (brace to the 6x6 post): 4

1/2" x 12" HDG hex bolt + nut + 2 washers — knee braces (brace to the (2)4x beam): 2

1/2" x 6" HDG hex bolt + nut + 2 washers — knee braces (brace to the joist block): 2

Simpson LUS28Z face-mount hanger 2x8/2x10: 14

Simpson HUCQ210-2-SDS concealed-flange double 2x10 hanger (SDS screws included): 4

Simpson DTT1Z lateral tie kit w/ SDS screws: 4

Simpson H2.5AZ hurricane tie (joists to the drop beam, hidden): 9


Simpson CCQ column cap, 7" seat for the (2)4x10 beam on a 6x6 post (SDS screws incl.) — confirm SKU / engineer's equal:

# S-102 STRUCTURE ISOMETRIC — FRAME, LABELED

Piers, post bases, posts, knee braces, post caps, beam, joists, double rims, ledger, blocking

5549 S Lansing Ct — elevated deck, 8' x 12' at 10' (TimberTech...

GSX · Jade Pender 303-550-9558 · October 17, 2026 · Rev 0 FOR REVIEW

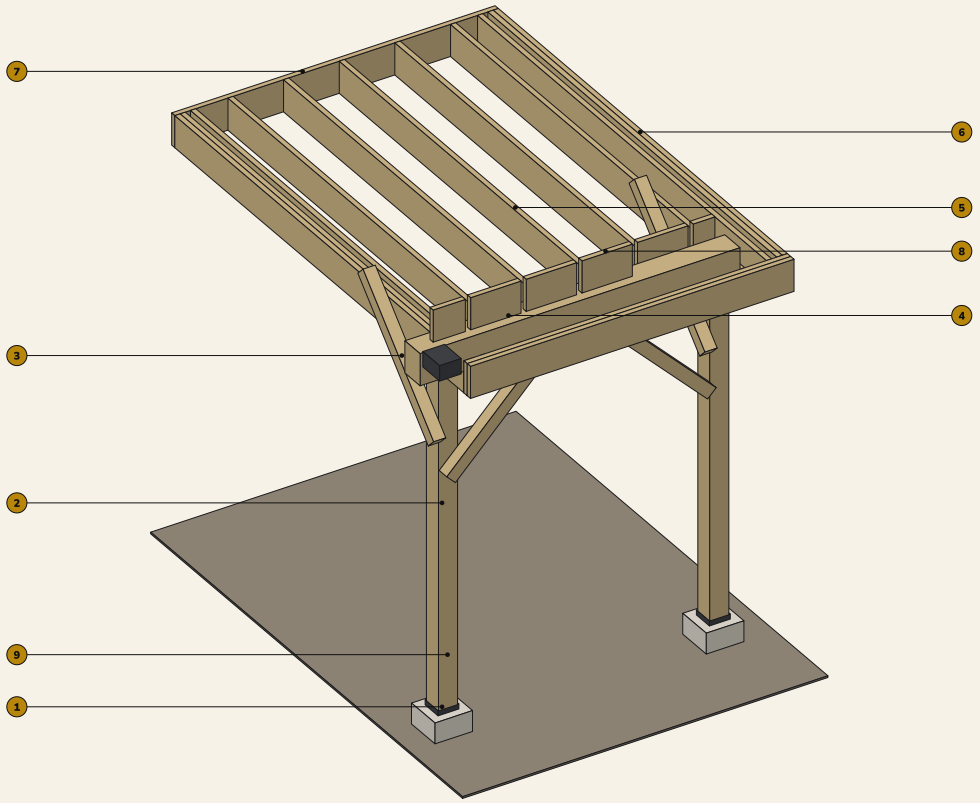


**KEY**

1. Diamond Pier DP-50/50 — head + 4 driven pins (frost-protected, no excavation)
2. 6x6 Douglas fir #1 post on a ABA66Z standoff base
3. 4x4 DF #1 knee brace at 45°, both directions, through-bolted
4. Beam
5. 2x10 joist
6. Rim
7. Ledger
8. Blocking
9. Gravel over 6-mil poly under the decks

Decking, rail and house removed to show the frame. Joists hang from the ledger in face-mount hangers, bear on the drop beam with H2.5AZ ties; double rims in concealed-flange hangers.

Axonometric · not to scale · the model the plans are drawn from


Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

# A-101 DECKING PLAN

Every board, border and divider as it lays; rail posts shown for the pockets

5549 S Lansing Ct — elevated deck, 8' x 12' at 10' (TimberTech...

GSX · Jade Pender 303-550-9558 · October 17, 2026 · Rev 0 FOR REVIEW

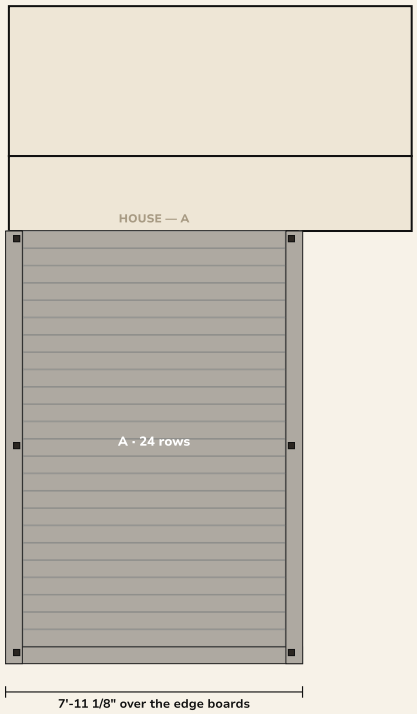


## DECKING

Field: TimberTech Reserve Driftwood, 5.36" x 0.94", 3/16" gaps

Border: Reserve Driftwood

Boards run parallel to the house; edge overhang 1 1/16" over the fascia

CONCEALoc at every joist in every gap (168)

Cap-Tor xd color-matched ONLY at: first row 1 per joist on the house edge · borders 2 per bearing point @ 16" · fascia 2 at each board end then

Rows per zone: A 24 (no rips)


# A-201 Railing plan + elevation


## A-201 RAILING PLAN + ELEVATION

Post IDs and types (E end · L line · C corner), bay lengths, outer-edge elevation

5549 S Lansing Ct — elevated deck, 8' x 12' at 10' (TimberTech...

GSX · Jade Pender 303-550-9558 · October 17, 2026 · Rev 0 FOR REVIEW

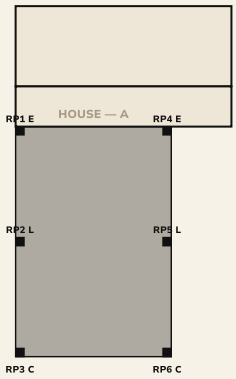

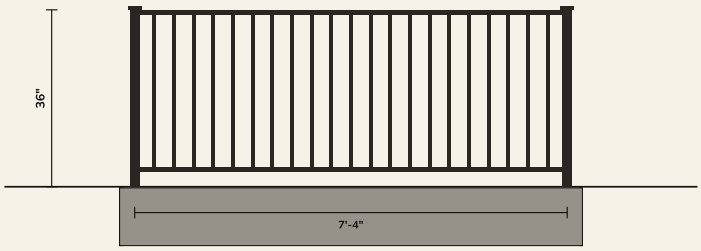
### RAILING

IRX Baluster 36" Bronze: 5 bays, 6 posts, 31 LF

IRX Baluster 36" — 6 posts (2 CORNER, 2 END, 2 LINE) surface-mounted on the decking over a 2x blocking pair between the rim plies and the PF joist at every post, (4) HeadLOK 6" per post through the base

Bays: left 5'-6 1/4" · left 5'-6 1/4" · right 5'-6 1/4" · right 5'-6 1/4" · front 7'-4"

Guard 36" min above the deck; openings under 4" (IRC R312). Rail LF for labor = deck-edge LF of actual rail.

Plan above · elevation of the outer edge below

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.


# A-202 ELEVATIONS

Front from the yard and both ends, drawn from the model — deck and roof-cover heights


5549 S Lansing Ct — elevated deck, 8' x 12' at 10' (TimberTech...

GSX · Jade Pender 303-550-9558 · October 17, 2026 · Rev 0 FOR REVIEW

## FRONT ELEVATION — from the yard

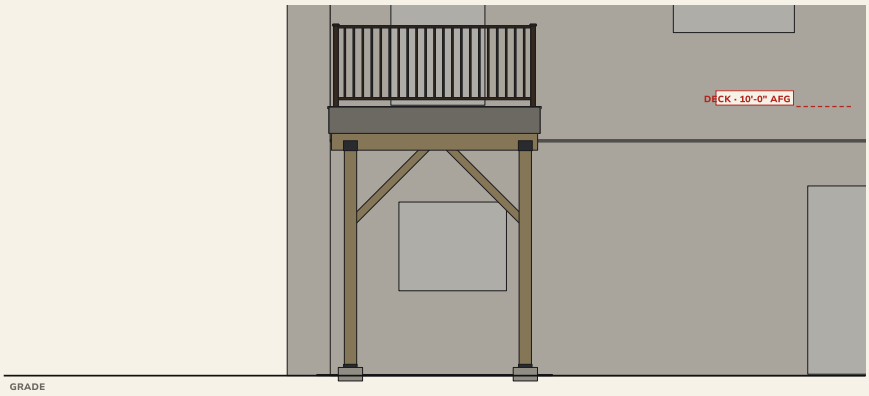



## RIGHT END ELEVATION

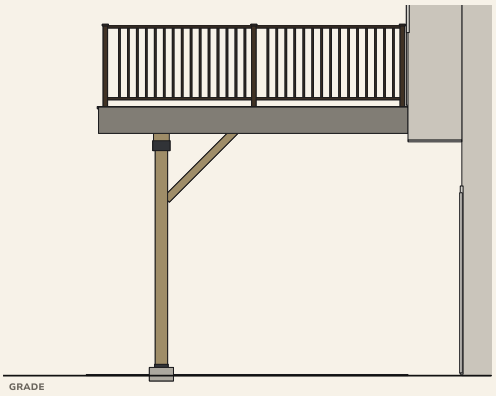


## NOTES

· Deck surface 10'-0" above grade
· Heights AFG = above finished grade at the beam line; field-verify grade before setting the piers
· Deck frame: 2x10 #1 True Frame GC @ 16" OC on a (2)4x10 DF #1 drop beam, 2 posts with 4x4 knee braces both ways
· Guard 36" min. on every open side — the surface is 10'-0" above grade (IRC R312.1)

## LEFT END ELEVATION

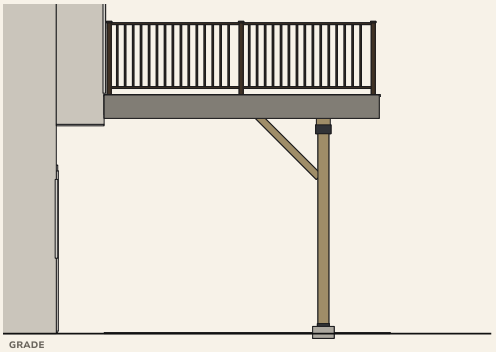

# A-301 Section + front elevation


## A-301 SECTION + FRONT ELEVATION

Cut through the deepest zone; heights to grade, frost line, cantilever, guard


5549 S Lansing Ct — elevated deck, 8' x 12' at 10' (TimberTech...

GSX · Jade Pender 303-550-9558 · October 17, 2026 · Rev 0 FOR REVIEW

**SECTION through zone A at 3'-10 1/2" — looking toward the left end**

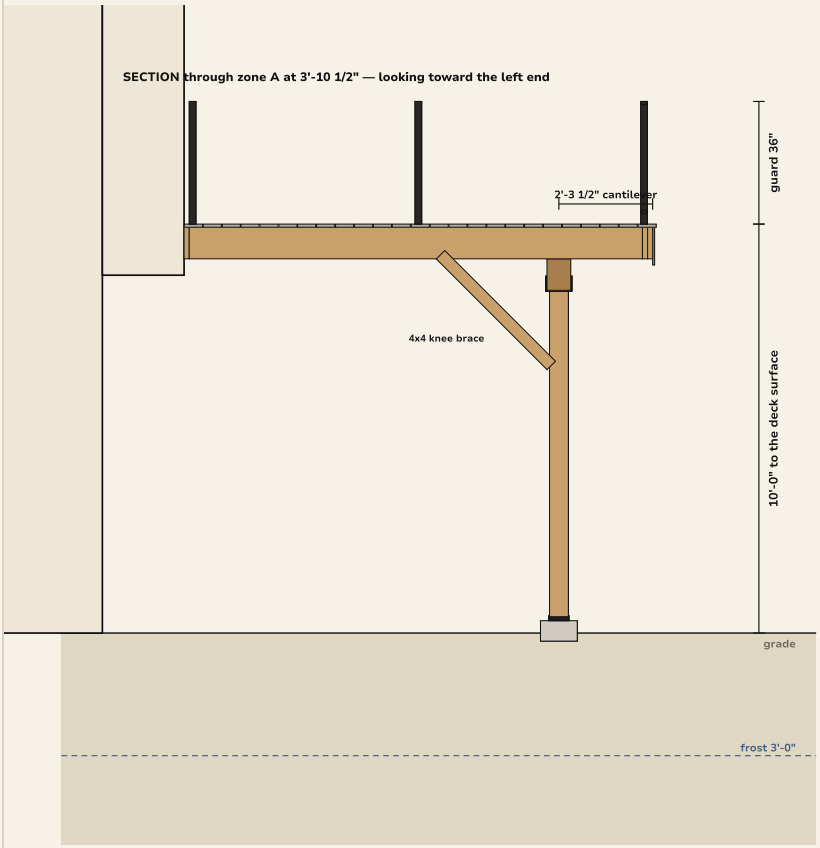


**FRONT ELEVATION — from the yard**

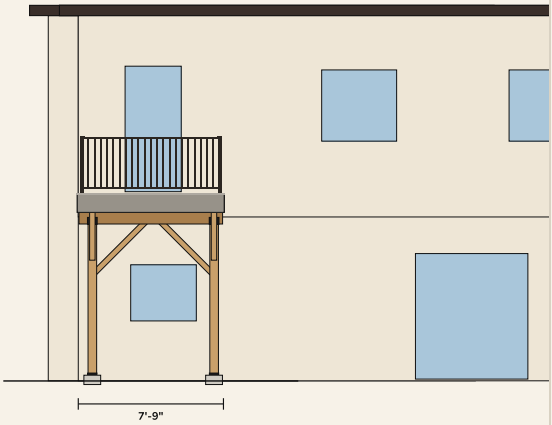


### SECTION NOTES

Deck surface 10'-0" above grade; guard 36" where the drop exceeds 30"

DROP (2)4x10 DF#1: 7'-8", 2 posts at 9" / 7'-3" (worst 2,214 lb)

Posts 2 x 6x6 Douglas fir #1 with 4x4 knee braces on DP-50/50

2x10 ledger x 7'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 9 fasteners

G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)

Section left · elevation right · not to a common scale

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.


# D-501 DETAILS

Ledger · post / beam / cap · footing · rail post · deck edge · the job's special condition

5549 S Lansing Ct — elevated deck, 8' x 12' at 10' (TimberTech...


GSX · Jade Pender 303-550-9558 · October 17, 2026 · Rev 0 FOR REVIEW

## 1 LEDGER AT THE HOUSE





2x10 ledger x 7'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 9 fasteners

## 2 POST · BEAM · CAP





DROP (2)4x10 DF#1: 7'-8", 2 posts at 9' 7 7'-3" (worst 2,214 lb)

## 3 FOOTING · POST BASE

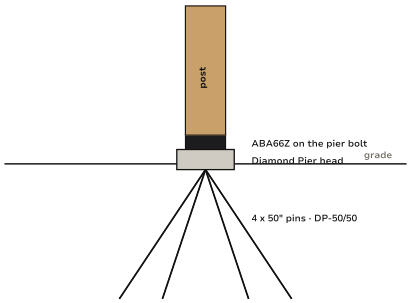



## 4 RAIL POST · GUARD

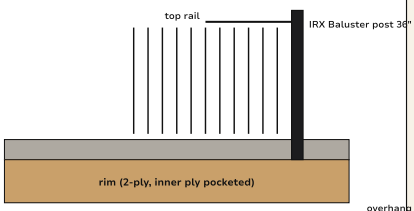


IRX Baluster 36" — 6 posts (2 CORNER, 2 END, 2 LINE) surface-mounted on the decking over a 2x blocking pair between the rim plies and the PF joist at every post, (4) HeadLOK 6" per post through the base

## 5 DECK EDGE · BORDER




CONCEALoc at every joist in every gap (168)

## 6 BLOCKING

Blocking one row over the beam, staggered up and down so every block can be end-nailed.

Schematic details, not to scale

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.


# D-502 CONNECTION DETAILS — FRAME

Ledger on the cantilever · hangers · joists on the beam · (2)4x10 on the cap · pier + base · knee braces

5549 S Lansing Ct — elevated deck, 8' x 12' at 10' (TimberTech...


GSX · Jade Pender 303-550-9558 · October 17, 2026 · Rev 0 FOR REVIEW

## 1 LEDGER ON THE CANTILEVERED FLOOR — SECTION

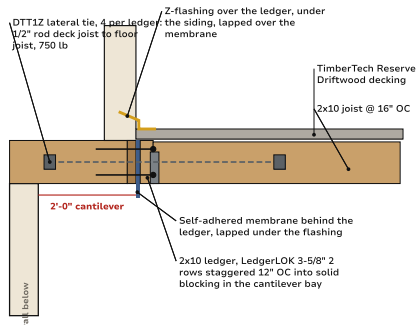



ENGINEER: Arapahoe County bars a ledger on a cantilevered floor without engineer approval. The stamped detail governs: ledger into the blocked cantilever joists, or a freestanding beam on posts at the house.

## 2 HANGERS — PLAN AT THE LEDGER + SIDE RIM

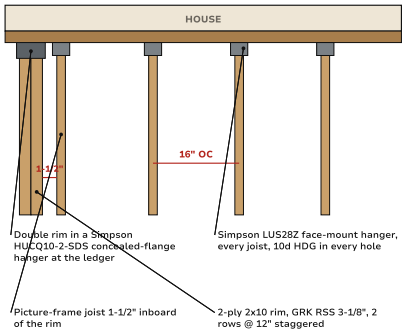



## 3 JOISTS ON THE DROP BEAM — SECTION

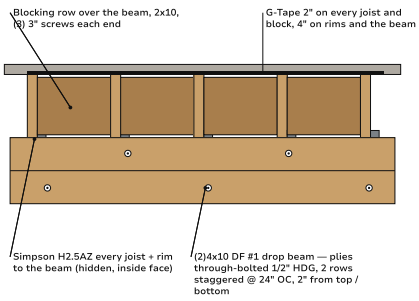



Joists bear the full beam width

Cantilever 2'-3 1/2" past the beam — over L/4: engineer


## 4 (2)4x10 BEAM ON THE 6x6 — ELEVATION

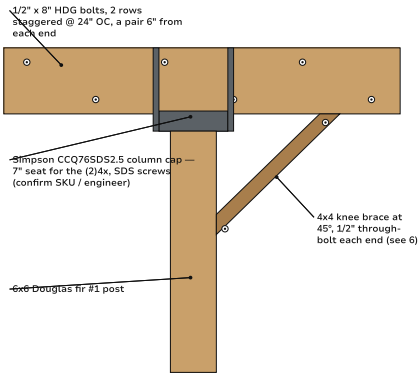


## 5 POST BASE ON THE DIAMOND PIER — SECTION

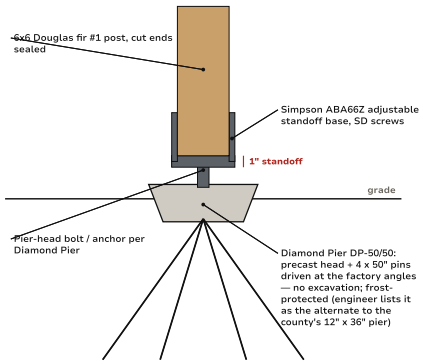


## 6 KNEE BRACES — BOTH DIRECTIONS

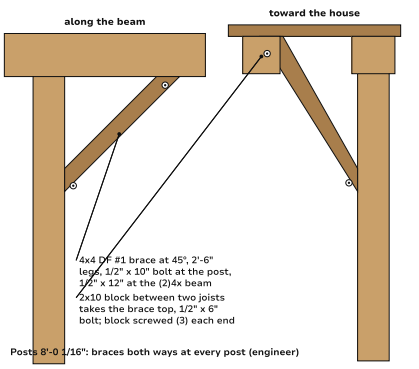


Posts 8'-0 1/16": braces both ways at every post (engineer)


# D-504 CONNECTION DETAILS — DECK EDGE, RAIL, LATERAL

Rail post mounting · picture frame + fascia · guard bay · DTT1Z lateral ties · joist tape · fastening schedule


5549 S Lansing Ct — elevated deck, 8' x 12' at 10' (TimberTech...

GSX · Jade Pender 303-550-9558 · October 17, 2026 · Rev 0 FOR REVIEW


## 1 RAIL POST — SURFACE MOUNT ON BLOCKING

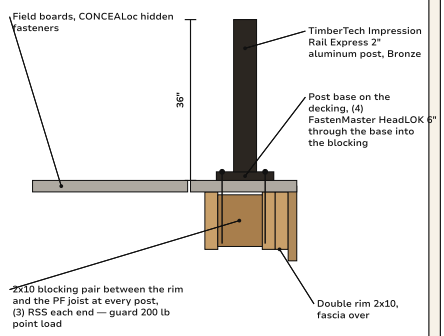


## 2 DECK EDGE — PICTURE FRAME + FASCIA

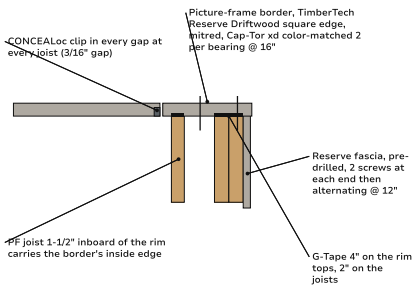



## 3 GUARD — ONE BAY, ELEVATION

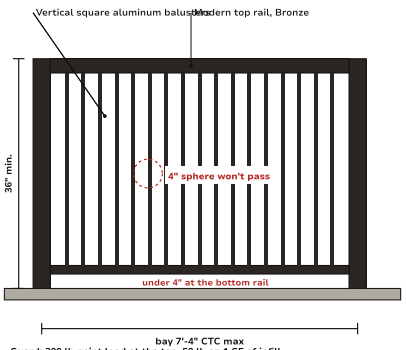



Guard: 200 lb point load at the top, 50 lb on 1 SF of infill (IRC Table R301.5) — submit the rail code report

## 4 LATERAL LOAD — DTT1Z TIES (PLAN)

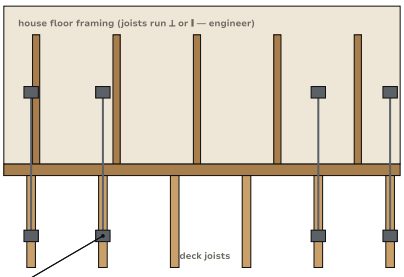


(4) Simpson DTT1Z, 2 near each end of the ledger: 1/2" threaded rod through the ledger and the band into a floor joist (or blocking) inside — 750 lb each (IRC R507.9.2)


## 5 JOIST TAPE + BLOCKING




Nichigo G-Tape 3035 (black) on every top edge before decking, lapped over the ends and down the sides 1/2"; one row of 2x10 blocking over the beam, (3) structural screws each

## 6 FASTENING SCHEDULE

| | |
|---|---|
| **Ledger to house** | LedgerLOK 3-5/8", 2 rows staggered 12" OC — engineer |
| **Lateral** | (4) DTT1Z, 1/2" rod into the floor framing |
| **Joist to ledger** | LUS28Z, 10d HDG every hole |
| **Rim to ledger** | HUCQ10-2-SDS, SDS screws |
| **Rim plies** | GRK RSS 3-1/8", 2 rows @ 12" staggered |
| **Joist to beam** | H2.5AZ each joist + rim, 10d x 1-1/2" |
| **Beam plies** | 1/2" x 8" HDG bolts, 2 rows staggered @ 24" |
| **Beam to post** | CCQ76SDS2.5 cap, SDS screws |
| **Post to pier** | ABA66Z on the Diamond Pier, SD screws |
| **Knee braces** | 1/2" through-bolt each end (x10 / x12 / x6) |
| **Field boards** | CONCEALoc, every joist, every gap |
| **Borders / fascia** | Cap-Tor xd color-matched, pre-drilled |
| **Rail posts** | (4) HeadLOK 6" into blocking |

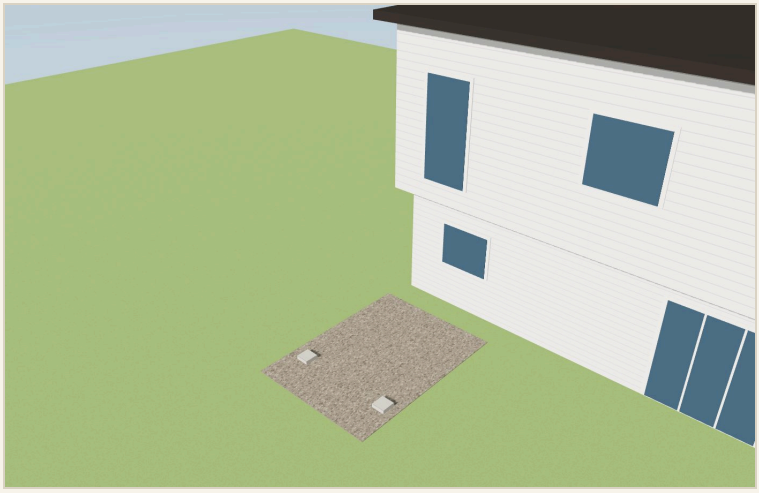

Step 1 · Footings — 2 Diamond Pier DP-50/50 driven-pin footings

## T-400 · Step 1 · Footings

### GOES IN


- (2) Diamond Pier DP-50/50 (head + 4 x 50" pins, plugs, caps)
- (2) Simpson ABA66Z adjustable post base 6x6 on the pier bolt

### HOW

- Call 811 and locate before any hole or pin. Strip the existing deck first.
- Pull the beam lines from the house wall: DROP (2)4x10 DF#1 at 9'-2" from the reference wall, posts at 9" / 7'-3".
- Set 2 Diamond Pier heads level at grade on undisturbed soil and drive the 4 pins in each; caps on.

### CHECK

- Footings on the layout within 1/2"; bearing on undisturbed soil
- Pins fully driven, heads level
- Photos before backfill

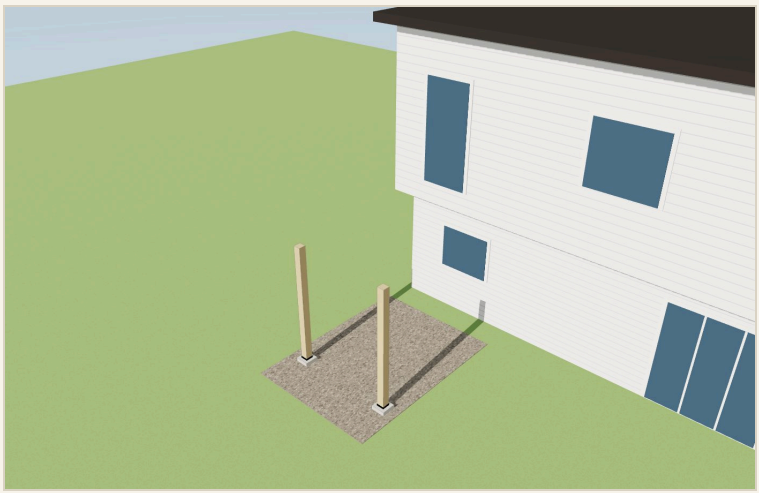

Step 2 · Posts — 6x6 Douglas fir #1 on ZMAX bases

## T-401 · Step 2 · Posts

### GOES IN


- (2) 6x6x10 Douglas Fir #1
- (2) Simpson ABA66Z adjustable post base 6x6 on the pier bolt

### HOW

- 6x6 posts on the bases; cut so the beam top lands at the joist bottom (drop beam) or the joist top (flush beam): DROP (2)4x10 DF#1 posts 8'-0 1/16" — field-measure each.
- Plumb both ways, brace, then the caps go on with the beams.

### CHECK

- Posts plumb to a string; tops on the beam line
- No post in ground contact without a standoff

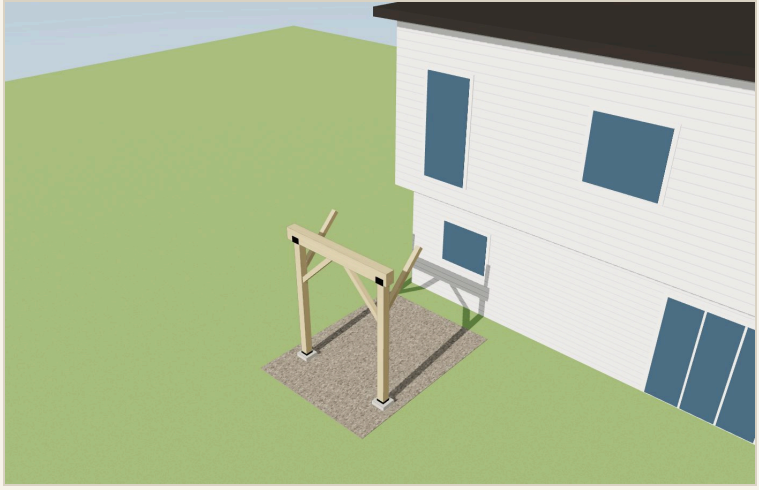

Step 4 · Beams — DROP (2)4x10 DF#1 (2 posts)

## T-403 · Step 4 · Beams

### GOES IN

- (2) 4x10x8 Douglas Fir #1
- (2) 6x6x10 Douglas Fir #1
- (2) Simpson CCQ column cap, 7" seat for the (2)4x10 beam on a 6x6 post (SDS screws incl.) — confirm SKU / engineer's equal
- (2) 4x4x8 Douglas Fir #1 — knee braces
- (4) 1/2" x 10" HDG hex bolt + nut + 2 washers — knee braces (brace to the 6x6 post)
- (2) 1/2" x 12" HDG hex bolt + nut + 2 washers — knee braces (brace to the (2)4x beam)
- (2) 1/2" x 6" HDG hex bolt + nut + 2 washers — knee braces (brace to the joist block)
- (10) 1/2" x 8" HDG carriage bolt + nut + washer

### HOW

- DROP (2)4x10 DF#1: 7'-8" one piece, 2 posts @ 6'-6" max
- Crown up, strung straight, caps screwed off with the SDS screws in the box.
- Two-ply beam: through-bolt the plies with 1/2" HDG bolts, 2 rows 2" from top and bottom, staggered @ 24" OC, a pair 6" from each end — before it goes up.
- Knee braces once the beam is capped: 4x4 at 45°, 2'-6" legs, one along the beam toward mid-span and one toward the house up to a 2x10 block between two joists (set the block with the frame) — 1/2" through-bolt each end, then pull the temporary bracing.

### CHECK

- Beam top = joist bottom (drop) / joist top (flush)
- Splices land on a post; caps fully fastened
- Every knee brace bolted both ends; posts still plumb



Step 5 · Frame — 2x10 joists at 16", rims, ledger, blocking over the beam

## T-404 · Step 5 · Frame

### GOES IN


- (15) 2x10x12 #1 True Frame Joist SYP GC
- (14) Simpson LUS28Z face-mount hanger 2x8/2x10
- (4) Simpson HUCQ210-2-SDS concealed-flange double 2x10 hanger (SDS screws included)
- (1) Camo 9ga HDG hanger nail 3" 5 lb (~350)
- (1) Camo 9ga HDG hanger nail 1-1/2" 5 lb (~650)
- (1) FastenMaster LedgerLOK 3-5/8" 50 ct
- (9) Simpson H2.5AZ hurricane tie (joists to the drop beam, hidden)
- (1) Ledger flashing set: SA membrane 6"x75' + (2) 10' alum. Z + end dams
- (2) Nichigo G-Tape 3035 2" x 65' black

### HOW

- 2x10 ledger x 7'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 9 fasteners
- A: 5 joists @ 16" OC x 11'-1". Crown up, hangers at the ledger.
- Blocking one row over the beam, staggered.
- G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)

### CHECK

- Frame square: diagonals within 1/8"
- Every hanger fully nailed; ledger fasteners per the schedule
- Tape continuous; photos of the ledger, hangers and footings before decking

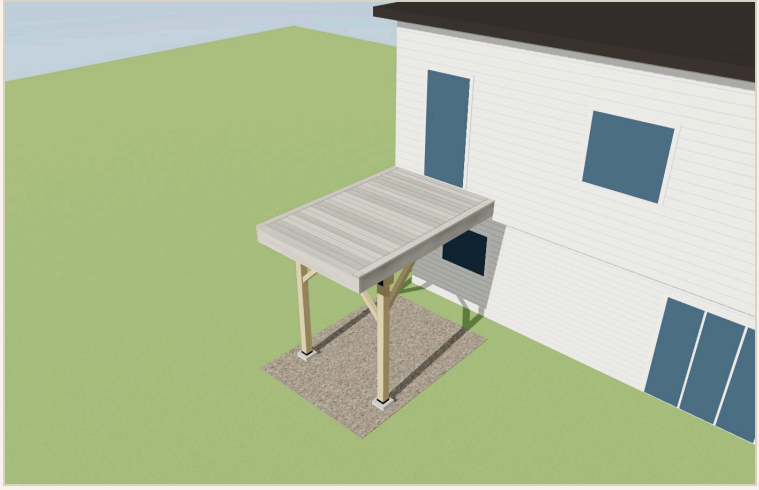

Step 6 · Decking — TimberTech Reserve Driftwood, hidden fasteners

## T-405 · Step 6 · Decking

### GOES IN

- (12) TimberTech Reserve Driftwood 1x6x16 Grooved
- (1) TimberTech Reserve Driftwood 1x6x12 Square Edge — borders
- (1) TimberTech Reserve Driftwood 1x6x20 Square Edge — borders
- (3) TimberTech Reserve Fascia Driftwood 0.58x11.95x12
- (1) TimberTech CONCEALoc hidden fastener 500 ct (screws incl.)
- (1) Starborn Cap-Tor xd 2-3/4" Epoxy Driftwood 350 ct

### HOW

- CONCEALoc at every joist in every gap (168)
- Cap-Tor xd color-matched ONLY at: first row 1 per joist on the house edge · borders 2 per bearing point @ 16" · fascia 2 at each board end then alternate top/bottom every 12", pre-drilled
- Rows per zone: A 24. Borders and breakers first, then the field rows from the outer edge toward the house.

### CHECK

- 3/16" gaps held
- No cut end shows at the outer edge
- Color: every board from the same run



Step 7 · Rail — IRX Baluster 36" Bronze

## T-406 · Step 7 · Rail

### GOES IN

- (4) TimberTech Impression Rail Express 6' x 36" level kit, vertical square aluminum balusters, modern top rail, Bronze
- (1) TimberTech Impression Rail Express 8' x 36" level kit, vertical square aluminum balusters, modern top rail, Bronze
- (6) TimberTech Impression Rail Express 2" aluminum post kit 36" (post, base, cap, skirt), Bronze
- (1) TimberTech Bronze touch-up paint (cut ends)

### HOW

- IRX Baluster 36" — 6 posts (2 CORNER, 2 END, 2 LINE) surface-mounted on the decking over a 2x blocking pair between the rim plies and the PF joist at every post, (4) HeadLOK 6" per post through the base

### CHECK

- Top of rail 36" above the decking; posts plumb
- Cables tensioned / balusters under 4" clear
- End of construction

## 3D MODEL



The interactive 3D model lives at the online version of this document.

Prices: rate card · GC at cost · 37.0% GM (owner-set, under the 40% floor) · financed ÷ 0.93 unless the job says otherwise. Internal — not for the homeowner.