

10 x 10 Deck · TimberTech Prime+ Sea Salt Gray

SOLD · 10' x 10' · 10' high · ledger one side · (2) 6x6 DF posts · 2x8 SYP @ 16" · 4x10 DF beam · Cinch black on three sides · Hardie skirt · joist tape on every member

COST TO BUILD	MATERIALS	TAX	LABOR	SITE SERVICES	SQUARE FEET
\$6,637	\$3,697	\$148	\$2,408	\$384	96

DESIGN READS

Frame	9'-9" x 9'-7" outside to outside
Deck	9'-11 1/8" x 9'-8 1/16" over fascia · 96 SF · 10'-0" above grade
Joists	8 2x8 #1 True Frame Joist SYP GC @ 16" OC x 9'-2 1/2"
Rims	2-ply 2x8 front and sides
Beam	DROP 4x10 DF: 9'-8", 2 posts at 1'-6" / 8'-4 3/16" (worst 1,987 lb)
Posts	2 x 6x6 on DP-50/50
Load	50 psf (40 psf live governs) · engineered
Decking	TimberTech Prime+ Sea Salt Gray — 20 rows parallel to the house, picture frame in Prime+ Sea Salt Gray, 3/16" gaps, Camo EdgeClip
Rail	Cinch 36" Satin Black: 6 bays, 7 posts, 29 LF

- nominal 10'-0" x 10'-0" -> frame 9'-9" x 9'-7": field boards cut to 9'-0", 20 full rows, deck over fascia 9'-11 1/8" x 9'-8 1/16"
- 2'-1 3/4" cantilever past the drop beam exceeds L/4 of the 7'-3 3/4" back-span — engineered condition (owner-directed)
- 4x10 DF beam: owner-placed posts give a 6'-10 3/16" span against 6'-3 3/16" allowable — engineer confirms
- Prime+ is scalloped — Cortex not approved; field is 100% hidden on Camo EdgeClips, board ends clipped on the PF joists

SITE & CODE FLAGS internal

STOP

ENGINEERING DROP 4x10 DF post spacing 6'-10 3/16" exceeds allowable 6'-3 3/16" — add a post or upsize the beam IRC Table R507.5

ENGINEER	ENGINEERING	cantilever 2'-1 3/4" > L/4 of the 7'-3 3/4" back-span — owner-directed, in the stamped set IRC R507.5 / R507.6
CODE	ENGINEERING	posts over 8' (8'-2 1/16") — add diagonal knee bracing at each post (both directions at the corners) DCA6 / IRC R507.4
CHECK	SETBACK	rear setback not entered — confirm the required rear setback and the deck-to-line distance before the frame is laid out zoning
CHECK	SETBACK	side setback not entered — confirm the required side setback and the deck-to-line distance before the frame is laid out zoning
CHECK	FOOTING	Diamond Pier: pins 50" — locate utilities (811) before driving; bearing 1,987 lb/post vs 3,300 lb allowable (manufacturer chart, confirm)
CHECK	LEDGER	verify the rim board behind the ledger is solid 2x/LVL/engineered rim (not I-joist web or a hollow band) before the ledger fasteners go in IRC R507.9.1.1
CHECK	PRODUCT	Cinch rail on 3" posts — confirm the post SKU, price and bracket set; the order carries the stock post price supplier
INFO	LEDGER	lateral: 4 x DTT1Z (750 lb each) into house floor framing IRC R507.9.2
INFO	WIND	basic wind speed 115 mph — standard connectors
INFO	FIRE	Prime+: Not rated for fire zones — fine outside a WUI zone
INFO	SETBACK	no address on the spec — tax rate and jurisdiction defaults used

THE ORDER
Decks & Docks · GSEXT1 · ship to the job

Lumber

NET	ORDER	UNIT	ITEM	WHY
15	16	ea	2x8x10 #1 True Frame Joist SYP GC	+1 cull (6 field joist · 2 PF joist · 2 left rim ply · 2 right rim ply · 2 front rim ply · ledger)
1	2	ea	2x8x12 #1 True Frame Joist SYP GC	+1 cull (blocking)
1	1	ea	4x10x10 Douglas Fir #2	exact (drop beam: DROP 4x10 DF)
2	2	ea	6x6x10 #2 GC	exact (yields 2 posts at ~8'-2 1/16")

Footings

NET	ORDER	UNIT	ITEM	WHY
2	2	ea	Diamond Pier DP-50/50 (head + 4 x 50" pins, plugs, caps)	exact — confirm stock
2	2	ea	Simpson ABA66Z adjustable post base 6x6 on the pier bolt	exact

Hardware

NET	ORDER	UNIT	ITEM	WHY
16	16	ea	Simpson LUS28Z face-mount hanger 2x8/2x10	exact (8 joists x 2 ends)
4	4	ea	Simpson HUCQ28-2-SDS concealed-flange double 2x8 hanger	exact (2 side rims x 2 ends) — confirm stock
1	1	box	Camo 9ga HDG hanger nail 3" 5 lb (~350)	96 needed of ~350
1	1	box	Camo 9ga HDG hanger nail 1-1/2" 5 lb (~650)	164 needed of ~650
1	1	box	FastenMaster LedgerLOK 3-5/8" 50 ct	11 needed
4	4	ea	Simpson DTT1Z lateral tie kit w/ SDS screws	exact (2 near each end of every ledger, into house floor framing)
10	10	ea	Simpson H2.5AZ hurricane tie (joists to the drop beam, hidden)	exact (8 joists + 2 rims at each drop beam)
2	2	ea	Simpson BC46Z post cap 6x post / 4x beam	exact
1	1	box	Simpson SD10212R100 #10 x 2-1/2" connector screw 100 ct	44 needed (bases 24 · caps 20)
1	1	box	GRK RSS #10 x 3-1/8" structural screw 100 ct	94 needed (laminations 66 · blocking 28)
14	16	ea	7/16" x 4-1/2" HDG hex bolt + nut + 2 washers	+2 (7 rail posts x 2)

Flashing & waterproofing

NET	ORDER	UNIT	ITEM	WHY
1	1	set	Ledger flashing set: SA membrane 6"x75' + (2) 10' alum. Z + end dams	exact
2	2	roll	Nichigo G-Tape 3035 2" x 65' black	92' needed of 130'
1	1	roll	Nichigo G-Tape 3035 4" x 65' black	38' needed of 65'

Decking

NET	ORDER	UNIT	ITEM	WHY
20	22	ea	TimberTech Prime+ Sea Salt Gray 1x6x12 Grooved	+2 (A: 20 rows @ 9'-0")
1	1	ea	TimberTech Prime+ Sea Salt Gray 1x6x12 Square Edge — borders	exact (right border 9'-8 1/16")
1	2	ea	TimberTech Prime+ Sea Salt Gray 1x6x20 Square Edge — borders	+1 (front border 9'-11 1/8" + left border 9'-8 1/16")

Fasteners

NET	ORDER	UNIT	ITEM	WHY
2	2	box	Camo EdgeClip 3/16" 410SS Black 90 ct	180 clips needed · 180 supplied
1	1	box	Starborn Cap-Tor xd 2-3/4" Epoxy Sea Salt Gray 350 ct	103 screws needed (first row 8 · border 56 · fascia 39)

Fascia

NET	ORDER	UNIT	ITEM	WHY
3	4	ea	Deck skirt — HardieTrim 4/4 x 12 x 12' smooth ColorPlus (color TBD) (wraps the double rim, in place of the composite fascia)	+1 (left fascia 9'-7 9/16" · right fascia 9'-7 9/16" · front fascia 9'-10 3/16")
1	1	box	Color-matched trim screws for HardieTrim, 100 ct ((color TBD))	32 color-matched screws, pre-drilled, 2 per joist line
1	1	kit	ColorPlus touch-up kit, (color TBD)	cut ends

Rail

NET	ORDER	UNIT	ITEM	WHY
6	6	ea	Cinch HD Rail 6' x 36" level panel Satin Black	exact (cut to 4'-3 1/2" / 4'-4 1/2")
2	2	ea	Cinch 3" CORNER post 36" Satin Black w/ brackets, cap, skirt	exact
2	2	ea	Cinch 3" END post 36" Satin Black w/ brackets, cap, skirt	exact
3	3	ea	Cinch 3" LINE post 36" Satin Black w/ brackets, cap, skirt	exact
1	1	ea	Rust-Oleum flat black touch-up (cut ends)	exact

FASTENER & CONNECTOR SCHEDULE

Ledger	2x8 ledger x 9'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 11 fasteners
Joist tape	G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)
Field	100% hidden — Camo EdgeClip 3/16" at every joist in every gap (9 bearing points x 20 gaps = 180); board ends clipped on the PF joists, never screwed
Face screws	Cap-Tor xd color-matched ONLY at: first row 1 per joist on the house edge · borders 2 per bearing point @ 16" · fascia 2 at each board end then alternate top/bottom every 12", pre-drilled
Rail	Cinch 36" — 7 posts (2 CORNER, 2 END, 3 LINE) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post

▼ Cut list

MEMBER	STOCK	LENGTH	QTY	NOTE
Field joists	2x8	9'-2 1/2"	6	@ 16" OC, crown up
Picture-frame joists	2x8	9'-2 1/2"	2	centre 5 1/4" from each frame face
Side rim plies	2x8	9'-2 1/2"	4	2-ply, laminated on the ground with RSS 2 rows @ 12" staggered
Front rim plies	2x8	9'-9"	2	inner ply takes the hangers; outer ply laminated after
Ledger	2x8	9'-9"	1	top at deck height less board thickness; membrane behind, flashing over
Blocking	2x8	1'-2 1/2"	7	1 row at 7'-5 1/4" from the wall

MEMBER	STOCK	LENGTH	QTY	NOTE
Field boards run A	Prime+ Sea Salt Gray	9'-0"	20	boards run parallel to the house
DROP 4x10 DF beam	4x10	9'-8"	1	y 7'-5 1/4"; posts at 1'-6" / 8'-4 3/16"
Posts under DROP 4x10 DF	6x6	8'-2 1/16"	2	field-measure each
Left border	Prime+ Sea Salt Gray square	9'-8 1/16"	1	mitre at the corners; dividers on the doubled joist
Right border	Prime+ Sea Salt Gray square	9'-8 1/16"	1	mitre at the corners; dividers on the doubled joist
Front border	Prime+ Sea Salt Gray square	9'-11 1/8"	1	mitre at the corners; dividers on the doubled joist
Left fascia	fascia	9'-7 9/16"	1	flush under the board nose; full board at the front corners, short piece at the house
Right fascia	fascia	9'-7 9/16"	1	flush under the board nose; full board at the front corners, short piece at the house
Front fascia	fascia	9'-10 3/16"	1	flush under the board nose; full board at the front corners, short piece at the house

COST TO BUILD materials at invoice · labor at the rate card · site services at cost

Materials — every line of the order	\$3,696.68
Sales tax 4.00% on materials	\$147.87
Labor	\$2,408.00
Site & project services at cost	\$384.00
Total cost to build	\$6,636.55

Materials by category

CATEGORY	LINES	COST
Lumber	4	\$507.90
Footings	2	\$302.00
Hardware	11	\$377.98
Flashing & waterproofing	3	\$137.00
Decking	3	\$853.20
Fasteners	2	\$216.60
Fascia	3	\$318.00
Rail	5	\$984.00
Materials		\$3,696.68

Labor

LINE	QTY	UNIT	RATE	EXT
Diamond Pier install (replaces caisson)	2	pier	\$50.00	\$100.00
Frame	96	SF	\$10.00	\$960.00
Decking & fascia	96	SF	\$8.00	\$768.00
Railing	29	LF	\$20.00	\$580.00
Labor				\$2,408.00

Site & project services — at cost

ITEM	AMOUNT	WHY
General conditions	\$384	\$4/SF x 96 SF

Engineering and permit — \$1,800 to \$3,000, billed at cost on top of the above.

RENDERS 3D model · design intent · timbers shown as specified



From the yard



From the front corner



Standing on the deck




Under the deck — posts, beams, footings

ISOMETRICS



Isometric from the stair corner

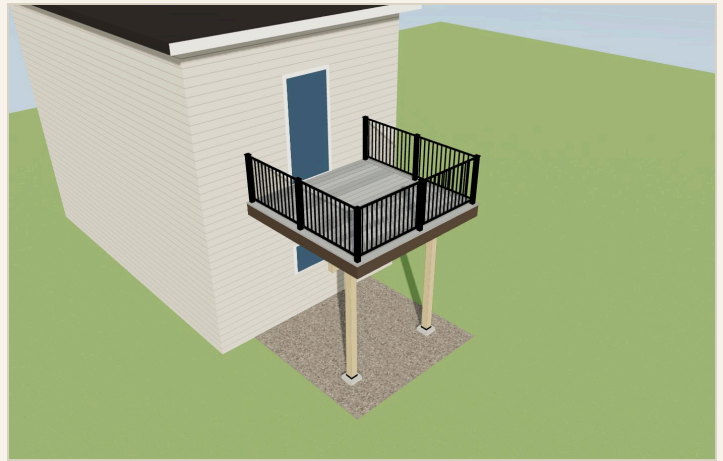

Isometric from the open corner



Low isometric




Isometric from under the frame




Plan from above


EXPLODED

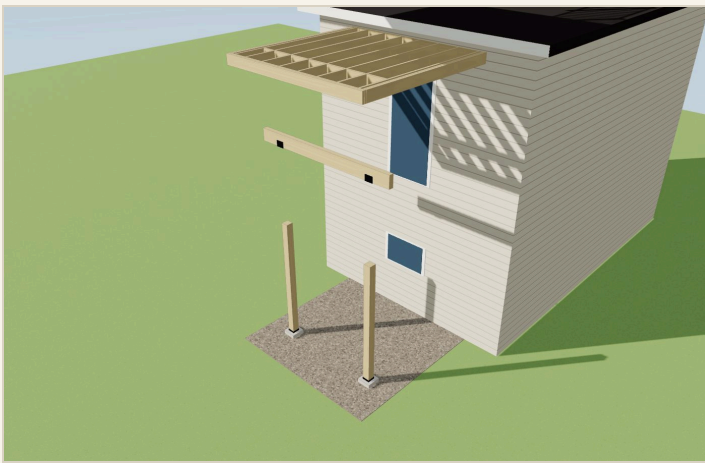

Exploded — every layer

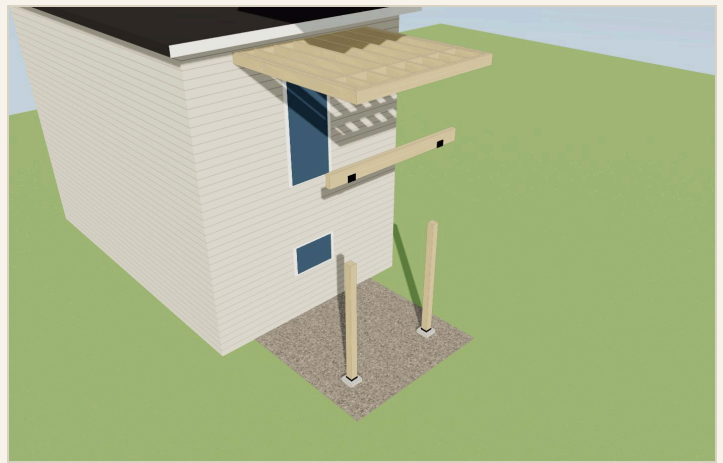

Exploded — from the open corner

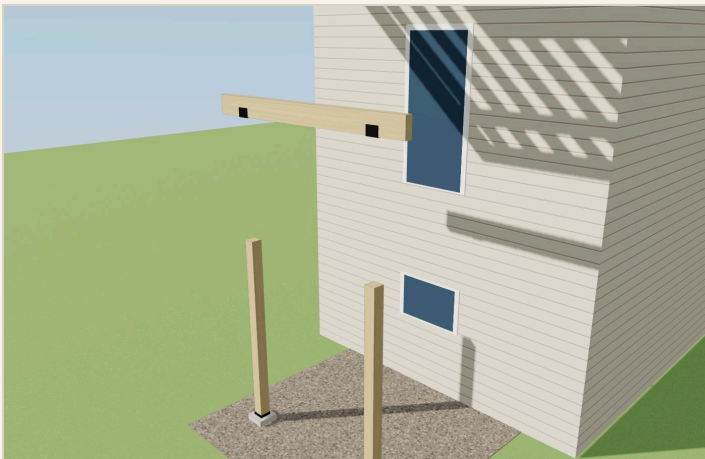

Exploded — from the front corner



Exploded — low angle

G-001 General notes · design criteria

G-001 GENERAL NOTES · DESIGN CRITERIA

Loads, codes, structure summary, sheet index, site — the permit-set cover

10 x 10 Deck — TimberTech Prime+ Sea Salt Gray


GSX · Jade Pender 303-550-9558 · September 21, 2026 · Rev 0 FOR REVIEW

PROJECT	
10 x 10 Deck — TimberTech Prime+ Sea Salt Gray	
CO	
96 SF · 10'-0" above grade · 1 zone	
DESIGN CRITERIA	
Deck live load	40 psf uniform (IRC Table R301.5); guards 200 lb concentrated / 50 plf
Ground snow	30 psf (ground; deck design uses the larger of snow and live) — 40 psf live governs
Dead load	10 psf deck
Roof snow (cover)	—
Design total	50 psf on the deck
Wind	115 mph Vult, Exposure C, Risk Cat. II (ASCE 7-16) — confirm special wind region
Frost depth	3'-0" (footings bear below)
Soil bearing	1,500 psf presumptive (IRC R401.4.1) — no soils report
Seismic	B
Wildfire (WUI)	not in a WUI zone
Codes	2021 IRC as adopted by the jurisdiction; IRC R507 decks; ASCE 7-16 loads; Tables R507.5 / R507.6 / R507.4 / R507.9
Engineering	Stamped structural set by a Colorado PE required — the stamped set governs
STRUCTURE	
Footings	DP-50/50
Posts	2 x 6x6
Beams	DROP 4x10 DF: 9'-8", 2 posts at 1'-6" / 8'-4 3/16" (worst 1,987 lb)
Joists	8 2x8 #1 True Frame Joist SYP GC @ 16" OC x 9'-2 1/2"
Rims	2-ply 2x8 front and sides
Ledger	2x8 ledger x 9'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 11 fasteners
Decking	TimberTech Prime+ Sea Salt Gray — 20 rows parallel to the house, picture frame in Prime+ Sea Salt Gray, 3/16" gaps, Camo EdgeClip
Rail	Cinch 36" Satin Black: 6 bays, 7 posts, 29 LF

SHEET INDEX	
G-001	General notes · design criteria
A-001	Isometric · renders
S-100	Foundation plan
S-101	Framing plan
A-101	Decking plan
A-201	Railing plan + elevation
A-301	Section + front elevation
D-501	Details
T-400	Build steps (build set)
T-700	Order + schedules (takeoff)

SITE	
Setbacks not on file — verify the plat / ILC before layout	

FLAGS (INTERNAL — remove before the permit submittal)	
STOP	DROP 4x10 DF post spacing 6'-10 3/16" exceeds allowable 6'-3...
ENGINEER	cantilever 2'-1 3/4" > L/4 of the 7'-3 3/4" back-span — owner...
CODE	posts over 8' (8'-2 1/16") — add diagonal knee bracing at each...

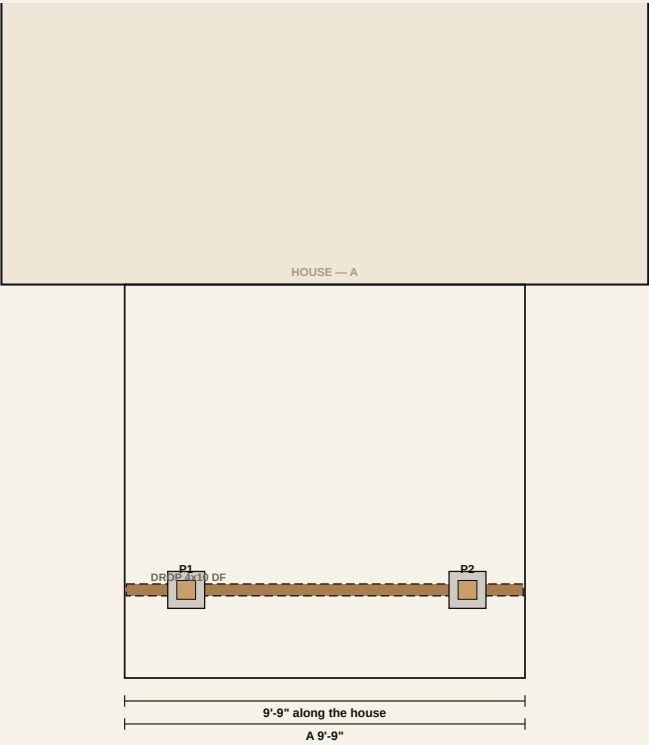


FOOTING SCHEDULE

Diamond Pier DP-50/50 (head + 4 x 50" pins),
3,300 lb allowable

ID	X	Y	ZONE	LOAD
P1	1'-6"	7'-5 1/4"	A	1,987 lb
P2	8'-4 3/16"	7'-5 1/4"	A	1,987 lb

x from the left frame face facing the house; y from the reference wall.
Frost 3'-0" · soil 1,500 psf · worst post 1,987 lb

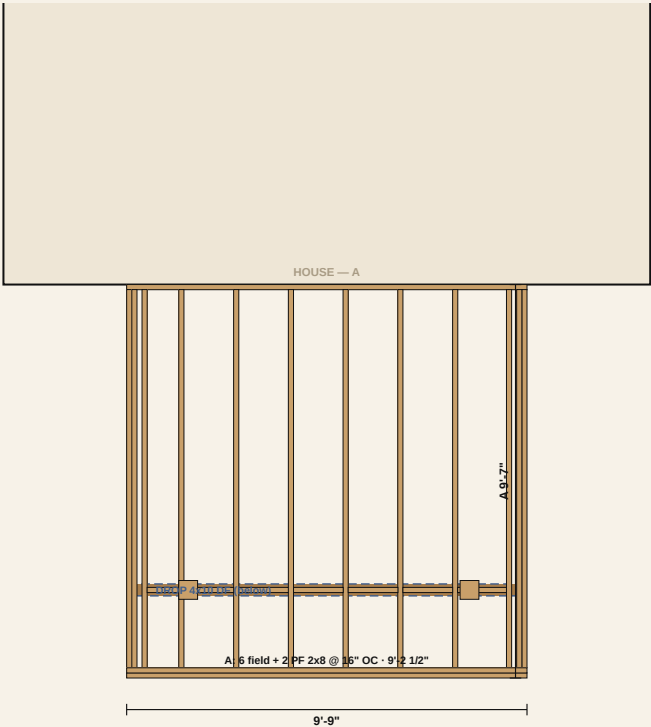

FRAMING NOTES

- 8 2x8 #1 True Frame Joist SYP GC @ 16" OC x 9'-2 1/2"
- 2-ply 2x8 front and sides
- 2x8 ledger x 9'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 11
- blocking one row over the beam, staggered
- G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)
- DROP 4x10 DF: 9'-8", 2 posts at 1'-6" / 8'-4 3/16" (worst 1,987 lb)
- Connectors:
 - Simpson LUS28Z face-mount hanger 2x8/2x10: 16
 - Simpson HUCQ28-2-SDS concealed-flange double 2x8 hanger: 4
 - Simpson DTT12Z lateral tie kit w/ SDS screws: 4
 - Simpson H2.5AZ hurricane tie (joists to the drop beam, hidden): 10
 - Simpson BC46Z post cap 6x post / 4x beam: 2
 - 7/16" x 4-1/2" HDG hex bolt + nut + 2 washers: 14

A-101 Decking plan


A-101

DECKING PLAN

Every board, border and divider as it lays; rail posts shown for the pockets

10 x 10 Deck — TimberTech Prime+ Sea Salt Gray

GSX · Jade Pender 303-550-9558 · September 21, 2026 · Rev 0 FOR REVIEW

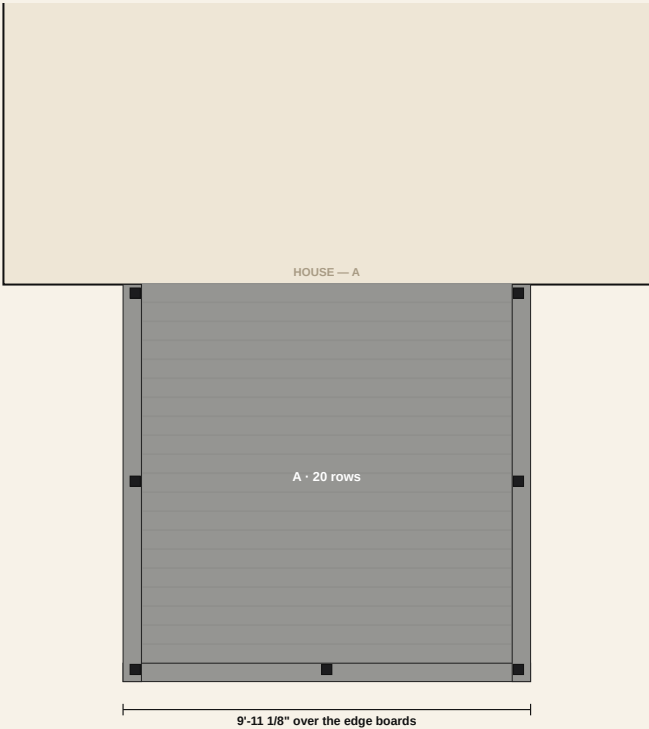

DECKING

Field: TimberTech Prime+ Sea Salt Gray,
5.36" x 0.94", 3/16" gaps
Border: Prime+ Sea Salt Gray
Boards run parallel to the house; edge
overhang 1 1/16" over the fascia
100% hidden — Camo EdgeClip 3/16" at
every joist in every gap (9 bearing
points x 20 gaps = 180); board ends
clipped on the PF joists, never screwed
Cap-Tor xd color-matched ONLY at: first
row 1 per joist on the house edge ·
borders 2 per bearing point @ 16" ·
fascia 2 at each board end then
Rows per zone: A 20 (no rips)


A-201 Railing plan + elevation

A-201 RAILING PLAN + ELEVATION

Post IDs and types (E end · L line · C corner), bay lengths, outer-edge elevation

10 x 10 Deck — TimberTech Prime+ Sea Salt Gray

GSX · Jade Pender 303-550-9558 · September 21, 2026 · Rev 0 FOR REVIEW

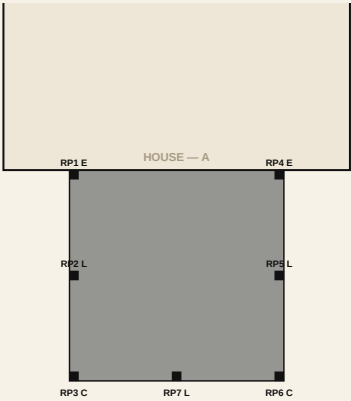

RAILING

Cinch 36" Satin Black: 6 bays, 7 posts, 29 LF

Cinch 36" — 7 posts (2 CORNER, 2 END, 3 LINE) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post

Bays: left 4'-7" · left 4'-7" · right 4'-7" · right 4'-7" · front 4'-8" · front 4'-8"

Guard 36" min above the deck; openings under 4" (IRC R312). Rail LF for labor = deck-edge LF of actual rail.



Plan above · elevation of the outer edge below

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

A-301 Section + front elevation

A-301


SECTION + FRONT ELEVATION

Cut through the deepest zone; heights to grade, frost line, cantilever, guard

10 x 10 Deck — TimberTech Prime+ Sea Salt Gray

GSX · Jade Pender 303-550-9558 · September 21, 2026 · Rev 0 FOR REVIEW


SECTION through zone A at 4'-10 1/2" — looking toward the left end

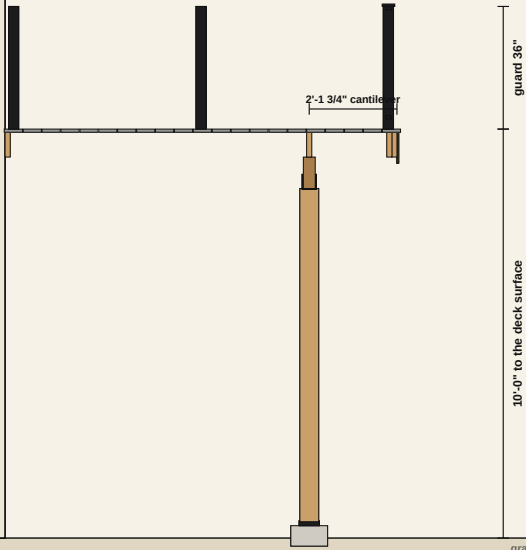

grade

frost 3'-0"

FRONT ELEVATION — from the yard

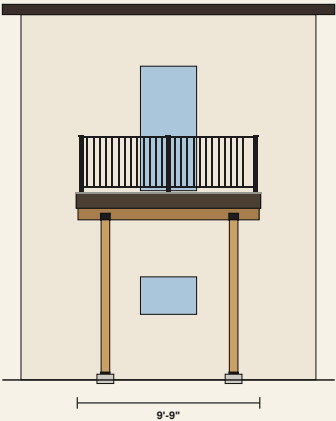

SECTION NOTES

Deck surface 10'-0" above grade; guard 36" where the drop exceeds 30"
DROP 4x10 DF: 9'-8", 2 posts at 1'-6" / 8'-4 3/16" (worst 1,987 lb)
Posts 2 x 6x6 on DP-50/50
2x8 ledger x 9'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 11 fasteners
G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)

Section left · elevation right · not to a common scale

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

D-501 Details


D-501 DETAILS

Ledger · post · beam · cap · footing · rail post · deck edge · the job's special condition

10 x 10 Deck — TimberTech Prime+ Sea Salt Gray


GSX · Jade Pender 303-550-9558 · September 21, 2026 · Rev 0 FOR REVIEW

1 LEDGER AT THE HOUSE




2x8 ledger x 9'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 11 fasteners

2 POST · BEAM · CAP




DROP 4x10 DF: 9'-6", 2 posts at 1'-6" / 8'-4 3/16" (worst 1,987 lb)

3 FOOTING · POST BASE

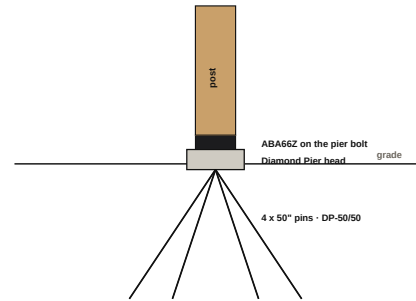


4 RAIL POST · GUARD

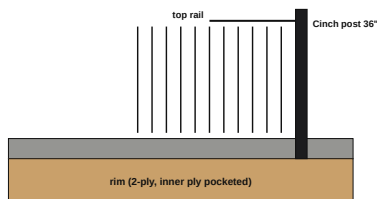

Cinch 36" — 7 posts (2 CORNER, 2 END, 3 LINE) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post

5 DECK EDGE · BORDER



100% hidden — Camo EdgeClip 3/16" at every joist in every gap (9 bearing points x 20 gaps = 180); board ends clipped on the PF joists, never screwed


6 BLOCKING

Blocking one row over the beam, staggered up and down so every block can be end-nailed.

Schematic details, not to scale

Design intent. The stamped engineering set governs structure, dimensions and locations. Field verify. Do not scale.

BUILD SET T-400 series · goes in · how · check

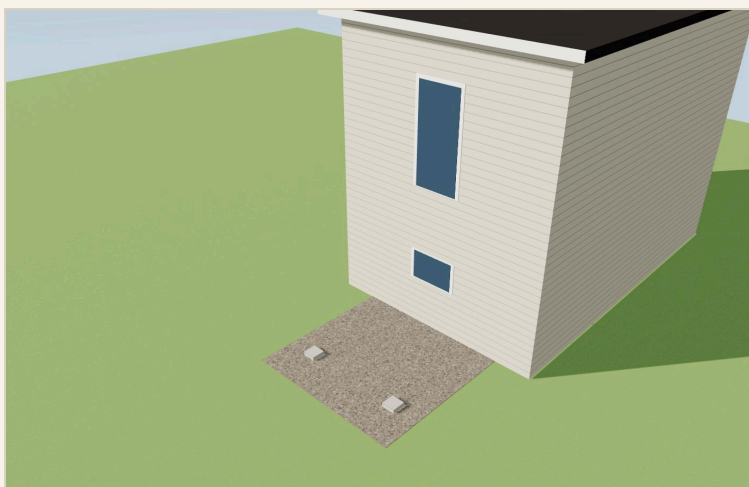

Step 1 · Footings — 2 Diamond Pier DP-50/50 driven-pin footings

T-400 · Step 1 · Footings

GOES IN


- (2) Diamond Pier DP-50/50 (head + 4 x 50" pins, plugs, caps)
- (2) Simpson ABA66Z adjustable post base 6x6 on the pier bolt

HOW

- Call 811 and locate before any hole or pin.
- Pull the beam lines from the house wall:
DROP 4x10 DF at 7'-5 1/4" from the reference wall, posts at 1'-6" / 8'-4 3/16".
- Set 2 Diamond Pier heads level at grade on undisturbed soil and drive the 4 pins in each; caps on.

CHECK

- Footings on the layout within 1/2"; bearing on undisturbed soil
- Pins fully driven, heads level
- Photos before backfill

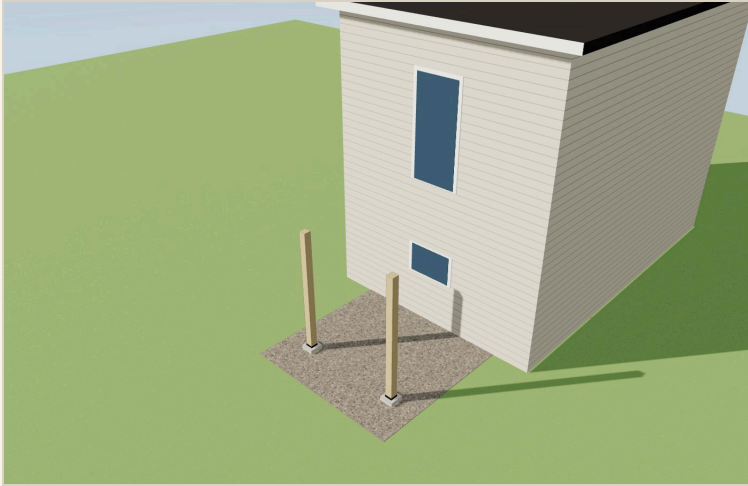

Step 2 · Posts — 6x6 #2 GC on ZMAX bases

T-401 · Step 2 · Posts

GOES IN


- (2) 6x6x10 #2 GC
- (2) Simpson ABA66Z adjustable post base 6x6 on the pier bolt

HOW

- 6x6 posts on the bases; cut so the beam top lands at the joist bottom (drop beam) or the joist top (flush beam): DROP 4x10 DF posts 8'-2 1/16" — field-measure each.
- Plumb both ways, brace, then the caps go on with the beams.

CHECK

- Posts plumb to a string; tops on the beam line
- No post in ground contact without a standoff

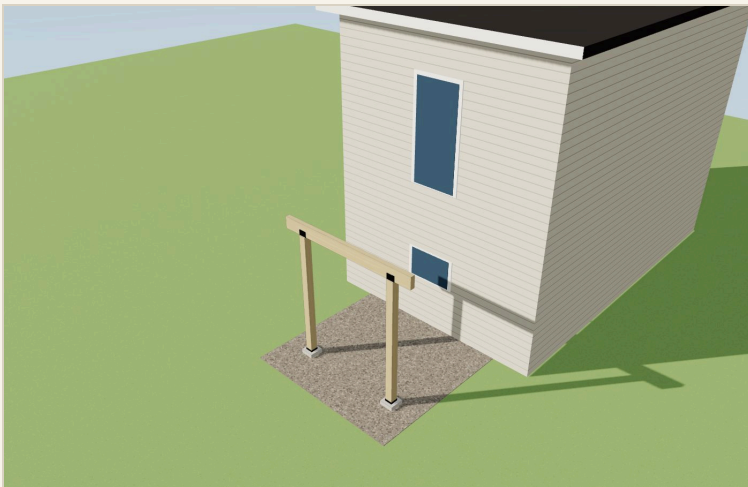

Step 4 · Beams — DROP 4x10 DF (2 posts)

T-403 · Step 4 · Beams

GOES IN

- (1) 4x10x10 Douglas Fir #2
- (2) 6x6x10 #2 GC
- (2) Simpson BC46Z post cap 6x post / 4x beam

HOW

- DROP 4x10 DF: 9'-8" one piece, 2 posts @ 6'-10 3/16" max
- Crown up, strung straight, caps screwed off with the SDS screws in the box.

CHECK

- Beam top = joist bottom (drop) / joist top (flush)
- Splices land on a post; caps fully fastened

T-404 · Step 5 · Frame

GOES IN

- (15) 2x8x10 #1 True Frame Joist SYP GC
- (1) 2x8x12 #1 True Frame Joist SYP GC
- (16) Simpson LUS28Z face-mount hanger 2x8/2x10
- (4) Simpson HUCQ28-2-SDS concealed-flange double 2x8 hanger
- (1) Camo 9ga HDG hanger nail 3" 5 lb (~350)
- (1) Camo 9ga HDG hanger nail 1-1/2" 5 lb (~650)
- (1) FastenMaster LedgerLOK 3-5/8" 50 ct
- (10) Simpson H2.5AZ hurricane tie (joists to the drop beam, hidden)
- (1) Ledger flashing set: SA membrane 6"x75' + (2) 10' alum. Z + end dams
- (2) Nichigo G-Tape 3035 2" x 65' black

HOW

- 2x8 ledger x 9'-9" total · LedgerLOK 2 rows 2" from top/bottom, staggered 12" OC, first 3" from each end · 11 fasteners
- A: 6 joists @ 16" OC x 9'-2 1/2". Crown up, hangers at the ledger.
- Blocking one row over the beam, staggered.
- G-Tape 2" every joist, PF joist, blocking and the ledger top · 4" on both rims and the beam(s)

CHECK

- Frame square: diagonals within 1/8"
- Every hanger fully nailed; ledger fasteners per the schedule
- Tape continuous; photos of the ledger, hangers and footings before decking



Step 5 · Frame — 2x8 joists at 16", rims, ledger, blocking over the beam

T-405 · Step 6 · Decking

GOES IN


- (20) TimberTech Prime+ Sea Salt Gray 1x6x12 Grooved
- (1) TimberTech Prime+ Sea Salt Gray 1x6x12 Square Edge — borders
- (1) TimberTech Prime+ Sea Salt Gray 1x6x20 Square Edge — borders
- (3) Deck skirt — HardieTrim 4/4 x 12 x 12' smooth ColorPlus (color TBD) (wraps the double rim, in place of the composite fascia)
- (1) Color-matched trim screws for HardieTrim, 100 ct ((color TBD))
- (1) ColorPlus touch-up kit, (color TBD)
- (2) Camo EdgeClip 3/16" 410SS Black 90 ct

HOW

- 100% hidden — Camo EdgeClip 3/16" at every joist in every gap (9 bearing points x 20 gaps = 180); board ends clipped on the PF joists, never screwed
- Cap-Tor xd color-matched ONLY at: first row 1 per joist on the house edge · borders 2 per bearing point @ 16" · fascia 2 at each board end then alternate top/bottom every 12", pre-drilled
- Rows per zone: A 20. Borders and breakers first, then the field rows from the outer edge toward the house.

CHECK

- 3/16" gaps held
- No cut end shows at the outer edge
- Color: every board from the same run

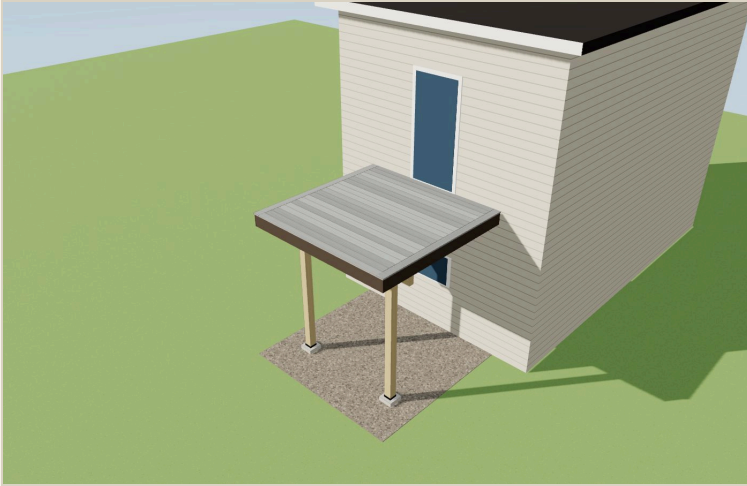

Step 6 · Decking — TimberTech Prime+ Sea Salt Gray, Sea Salt Gray border, hidden fasteners

T-406 · Step 7 · Rail

GOES IN

- (6) Cinch HD Rail 6' x 36" level panel Satin Black
- (2) Cinch 3" CORNER post 36" Satin Black w/ brackets, cap, skirt
- (2) Cinch 3" END post 36" Satin Black w/ brackets, cap, skirt
- (3) Cinch 3" LINE post 36" Satin Black w/ brackets, cap, skirt
- (1) Rust-Oleum flat black touch-up (cut ends)

HOW

- Cinch 36" — 7 posts (2 CORNER, 2 END, 3 LINE) inside the outer rim ply, inner ply pocketed 2" wide, (2) 7/16" x 4-1/2" bolts per post

CHECK

- Top of rail 36" above the decking; posts plumb
- Cables tensioned / balusters under 4" clear
- End of construction



Step 7 · Rail — Cinch 36" Satin Black

3D MODEL



The interactive 3D model lives at the online version of this document.

Cost to build: materials at invoice, labor at the rate card, site services at cost. Internal.