GS EXTERIOR EXPERTS · DECK DIVISION · PROPOSAL

Elevated Deck · 5549 S Lansing Ct


Prepared for Rachel Chiu · 5549 S Lansing Ct, Englewood, CO 80111 · October 19, 2026

CHECK OR ACH	FINANCED	MONTHLY
$19,533	**$21,003**	**$244**
	no money down	6.99% · 10 years




A new, larger deck off your back door: 8' along the house and 12' out, 10' above the backyard, in place of the existing one. Framed in TrueFrame lumber at 16" on center on a doubled 4x10 Douglas fir beam and two 6x6 Douglas fir #1 posts with knee braces, on Diamond Pier foundations, with joist tape on every member. TimberTech Reserve in Driftwood with a single picture frame on the three open sides and CONCEALoc hidden fasteners, so no screw heads show. TimberTech Impression Rail Express in Bronze with vertical balusters and the modern top rail. A tensioned triangle shade sail over the deck, anchored to the house under the eave and to one steel post that doubles as the corner post of the railing. The house attachment is engineered.

AT A GLANCE

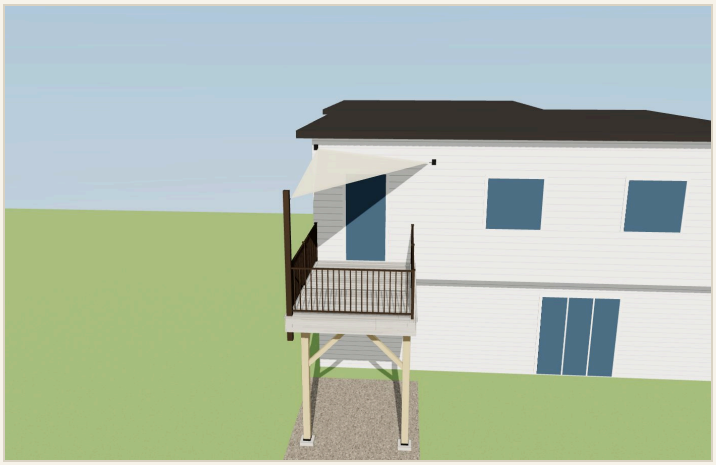

From the yard

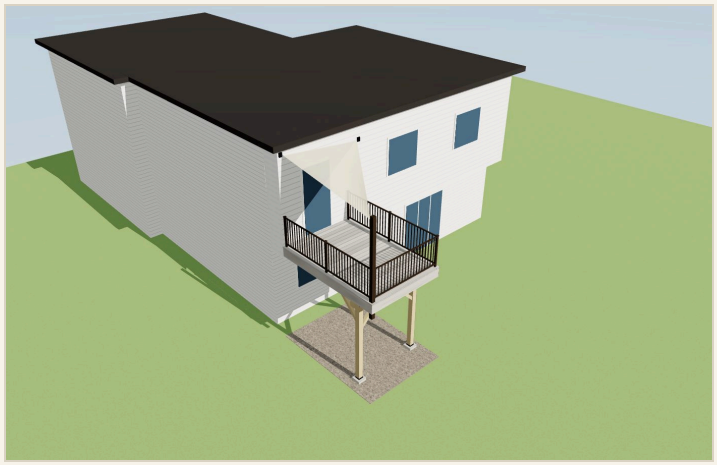

Isometric from the open corner

Deck	92 SF · 10'-0" above grade · 7'-11 1/8" x 11'-6 9/16" over fascia
Decking	TimberTech Reserve Driftwood · CONCEALoc fasteners
Rail	TimberTech Impression Rail Express, vertical balusters, modern top rail, Bronze, 36" · 31 LF
Structure	2x10 pressure-treated frame at 16" on centre, a doubled 4x10 Douglas fir beam; 2 x 6x6 Douglas fir #1 with 4x4 knee braces on DP-50/50
Design load	50 psf (40 psf live governs), stamped by a Colorado engineer


WHAT IT IS included in the price

ELEMENT	SELECTION
Decking	TimberTech Composite Reserve, Driftwood. Grooved boards, 3/16" gaps, matching fascia. Class C, not WUI; 30-yr product / 30-yr fade & stain.
Railing	TimberTech Impression Rail Express, vertical balusters, modern top rail, Bronze, 36". 31 LF.
Frame	7 2x10 #1 True Frame Joist SYP GC @ 16" OC x 11'-1"; 2-ply 2x10 front and sides; a doubled 4x10 Douglas fir beam.
Foundation	2 Diamond Pier foundations (DP-50/50) — no excavation.
Design load	30 psf snow, stamped by a Colorado engineer.
Hardware	Simpson ZMAX galvanized connectors. CONCEALoc fasteners.
Site	The existing deck removed and hauled off.

RENDERS 3D model · design intent



From the front corner

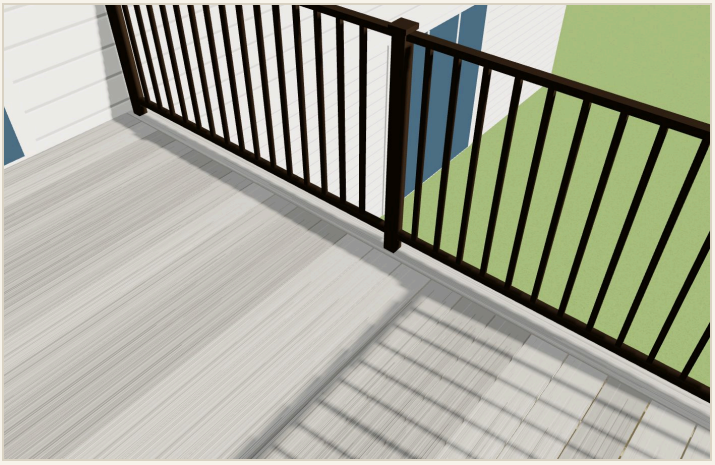

Standing on the deck



Low isometric



Under the deck — posts, beams, footings



Jul 15 · 9 AM — sun E, 35° up



Jul 15 · 12 PM — sun SE, 67° up



Jul 15 · 3 PM — sun WSW, 60° up




Jul 15 · 6 PM — sun W, 26° up




Dec 21 · 3 PM — sun SW, 14° up

ISOMETRICS the model from four corners

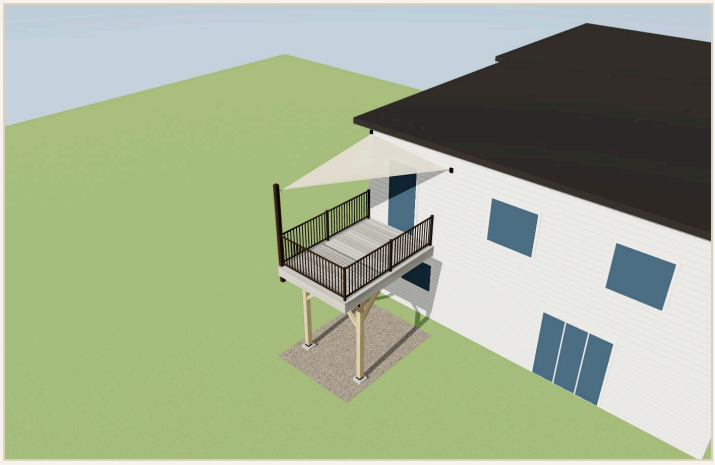


Isometric from the stair corner

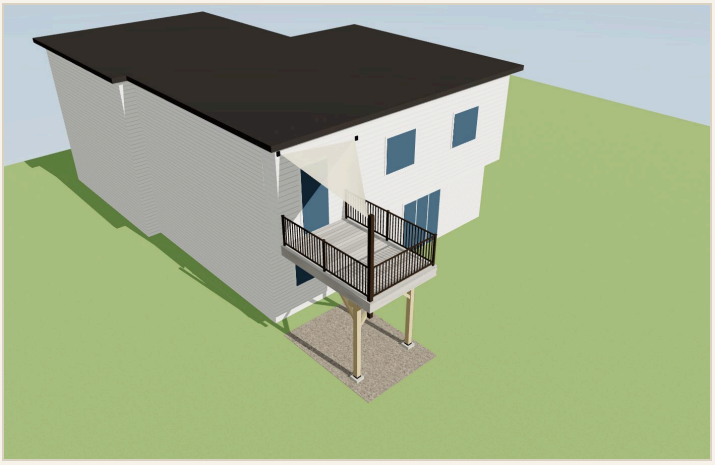

Isometric from the open corner




Isometric from under the frame

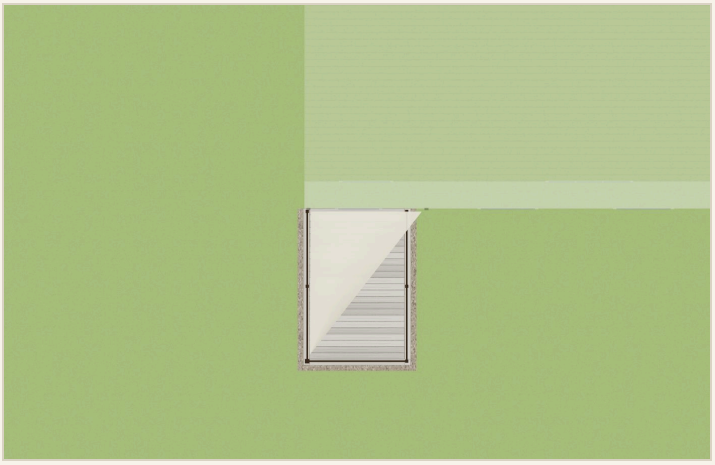


Plan from above


EXPLODED VIEWS every layer pulled apart

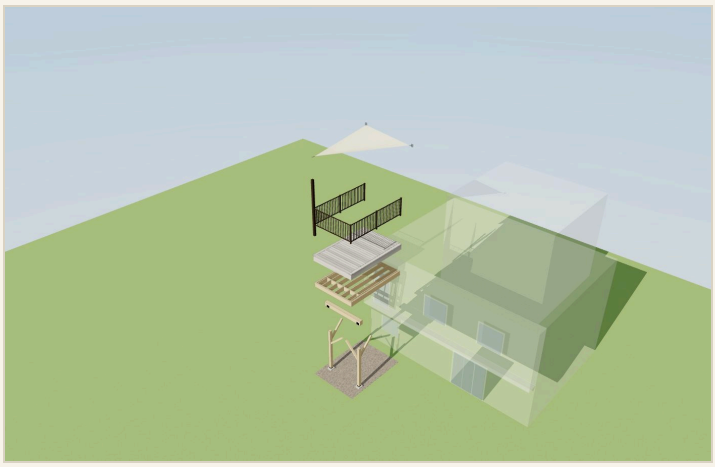

Exploded — every layer

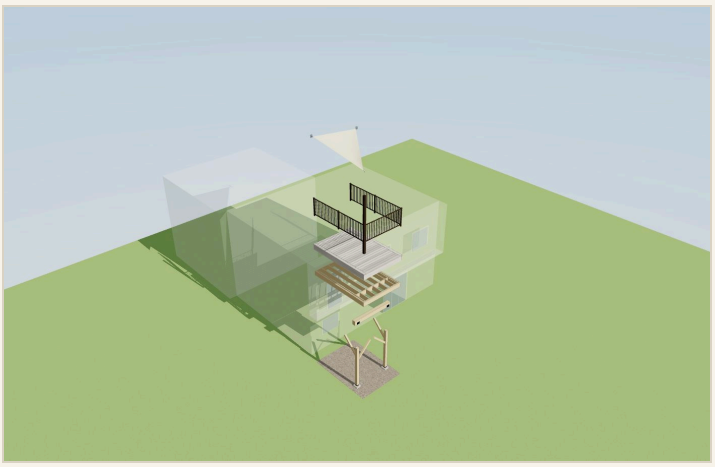


Exploded — from the open corner

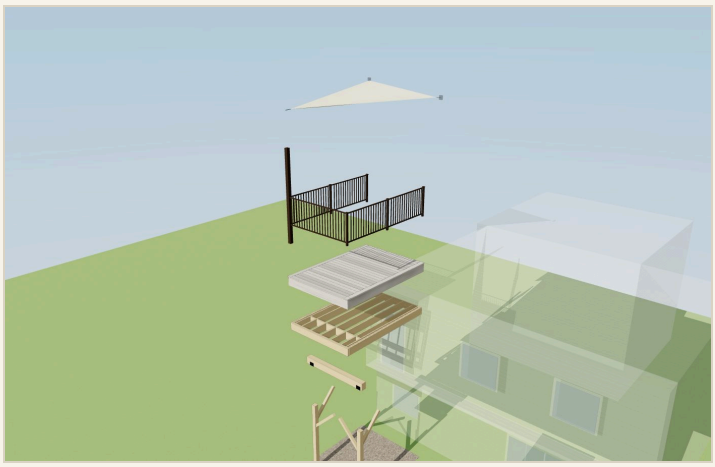


Exploded — from the front corner



Exploded — low angle

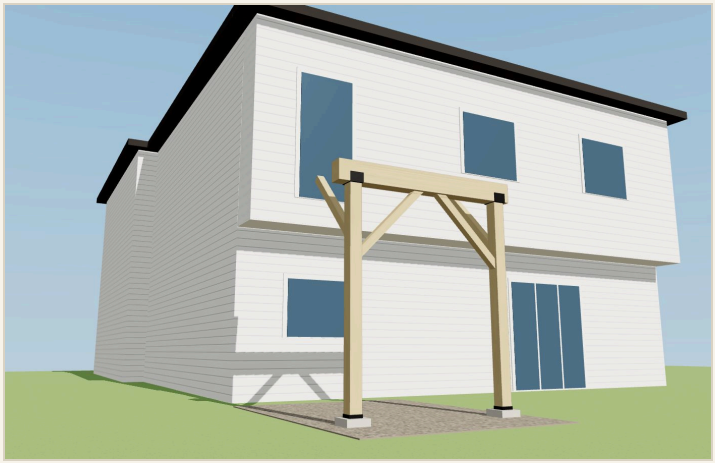

Posts and beams on the footings

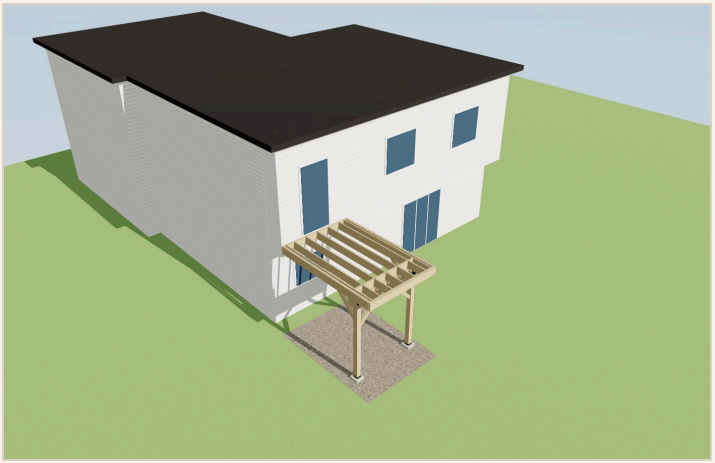

Frame only — joists, rims, beams, ledger

INVESTMENT

PRICE

Total investment $21,003 — financed, no money down

- 12 months no payments, no down payment
- 18 months no payments, no down payment
- 6.99% for 10 years — about $244/month

Check or ACH: $19,533 (7% savings)

WHAT THE PRICE INCLUDES

ITEM	VALUE
Demolition & haul-off	$203
Foundation & structure	$5,537
Decking & fascia	$4,631
Railing	$3,543
Shade sail on 1 steel post at the rail corner	$5,251
Site & project services	$368
Total, check or ACH	**$19,533**
Total, financed	**$21,003**

Engineering — $1,800 to $3,000. Stamped drawings by a Colorado engineer (30 psf snow). GSX provides the engineer and bills the engineering at cost, with no markup. You own the stamped set. It is separate from the deck price above.

NEXT STEP

Engineering first. This is a quote: the numbers depend on the stamped engineering, so the first step is engineering. GSX provides the Colorado engineer and supplies the design package; you pay GSX the engineer's cost at no markup and you own the stamped set. When the stamped set is in hand, GSX issues a fixed-price proposal on these numbers with the payment terms.

Quote, not a contract: a fixed-price proposal follows the stamped engineering. Quote numbers hold 30 days. Renders and plan are design intent; the stamped engineering set governs structure, dimensions and locations.

3D MODEL



The interactive 3D model lives at the online version of this document.

GS Exterior Experts · Deck Division

Renders and drawings are design intent; dimensions on the sheets govern. Numbers hold 30 days.